



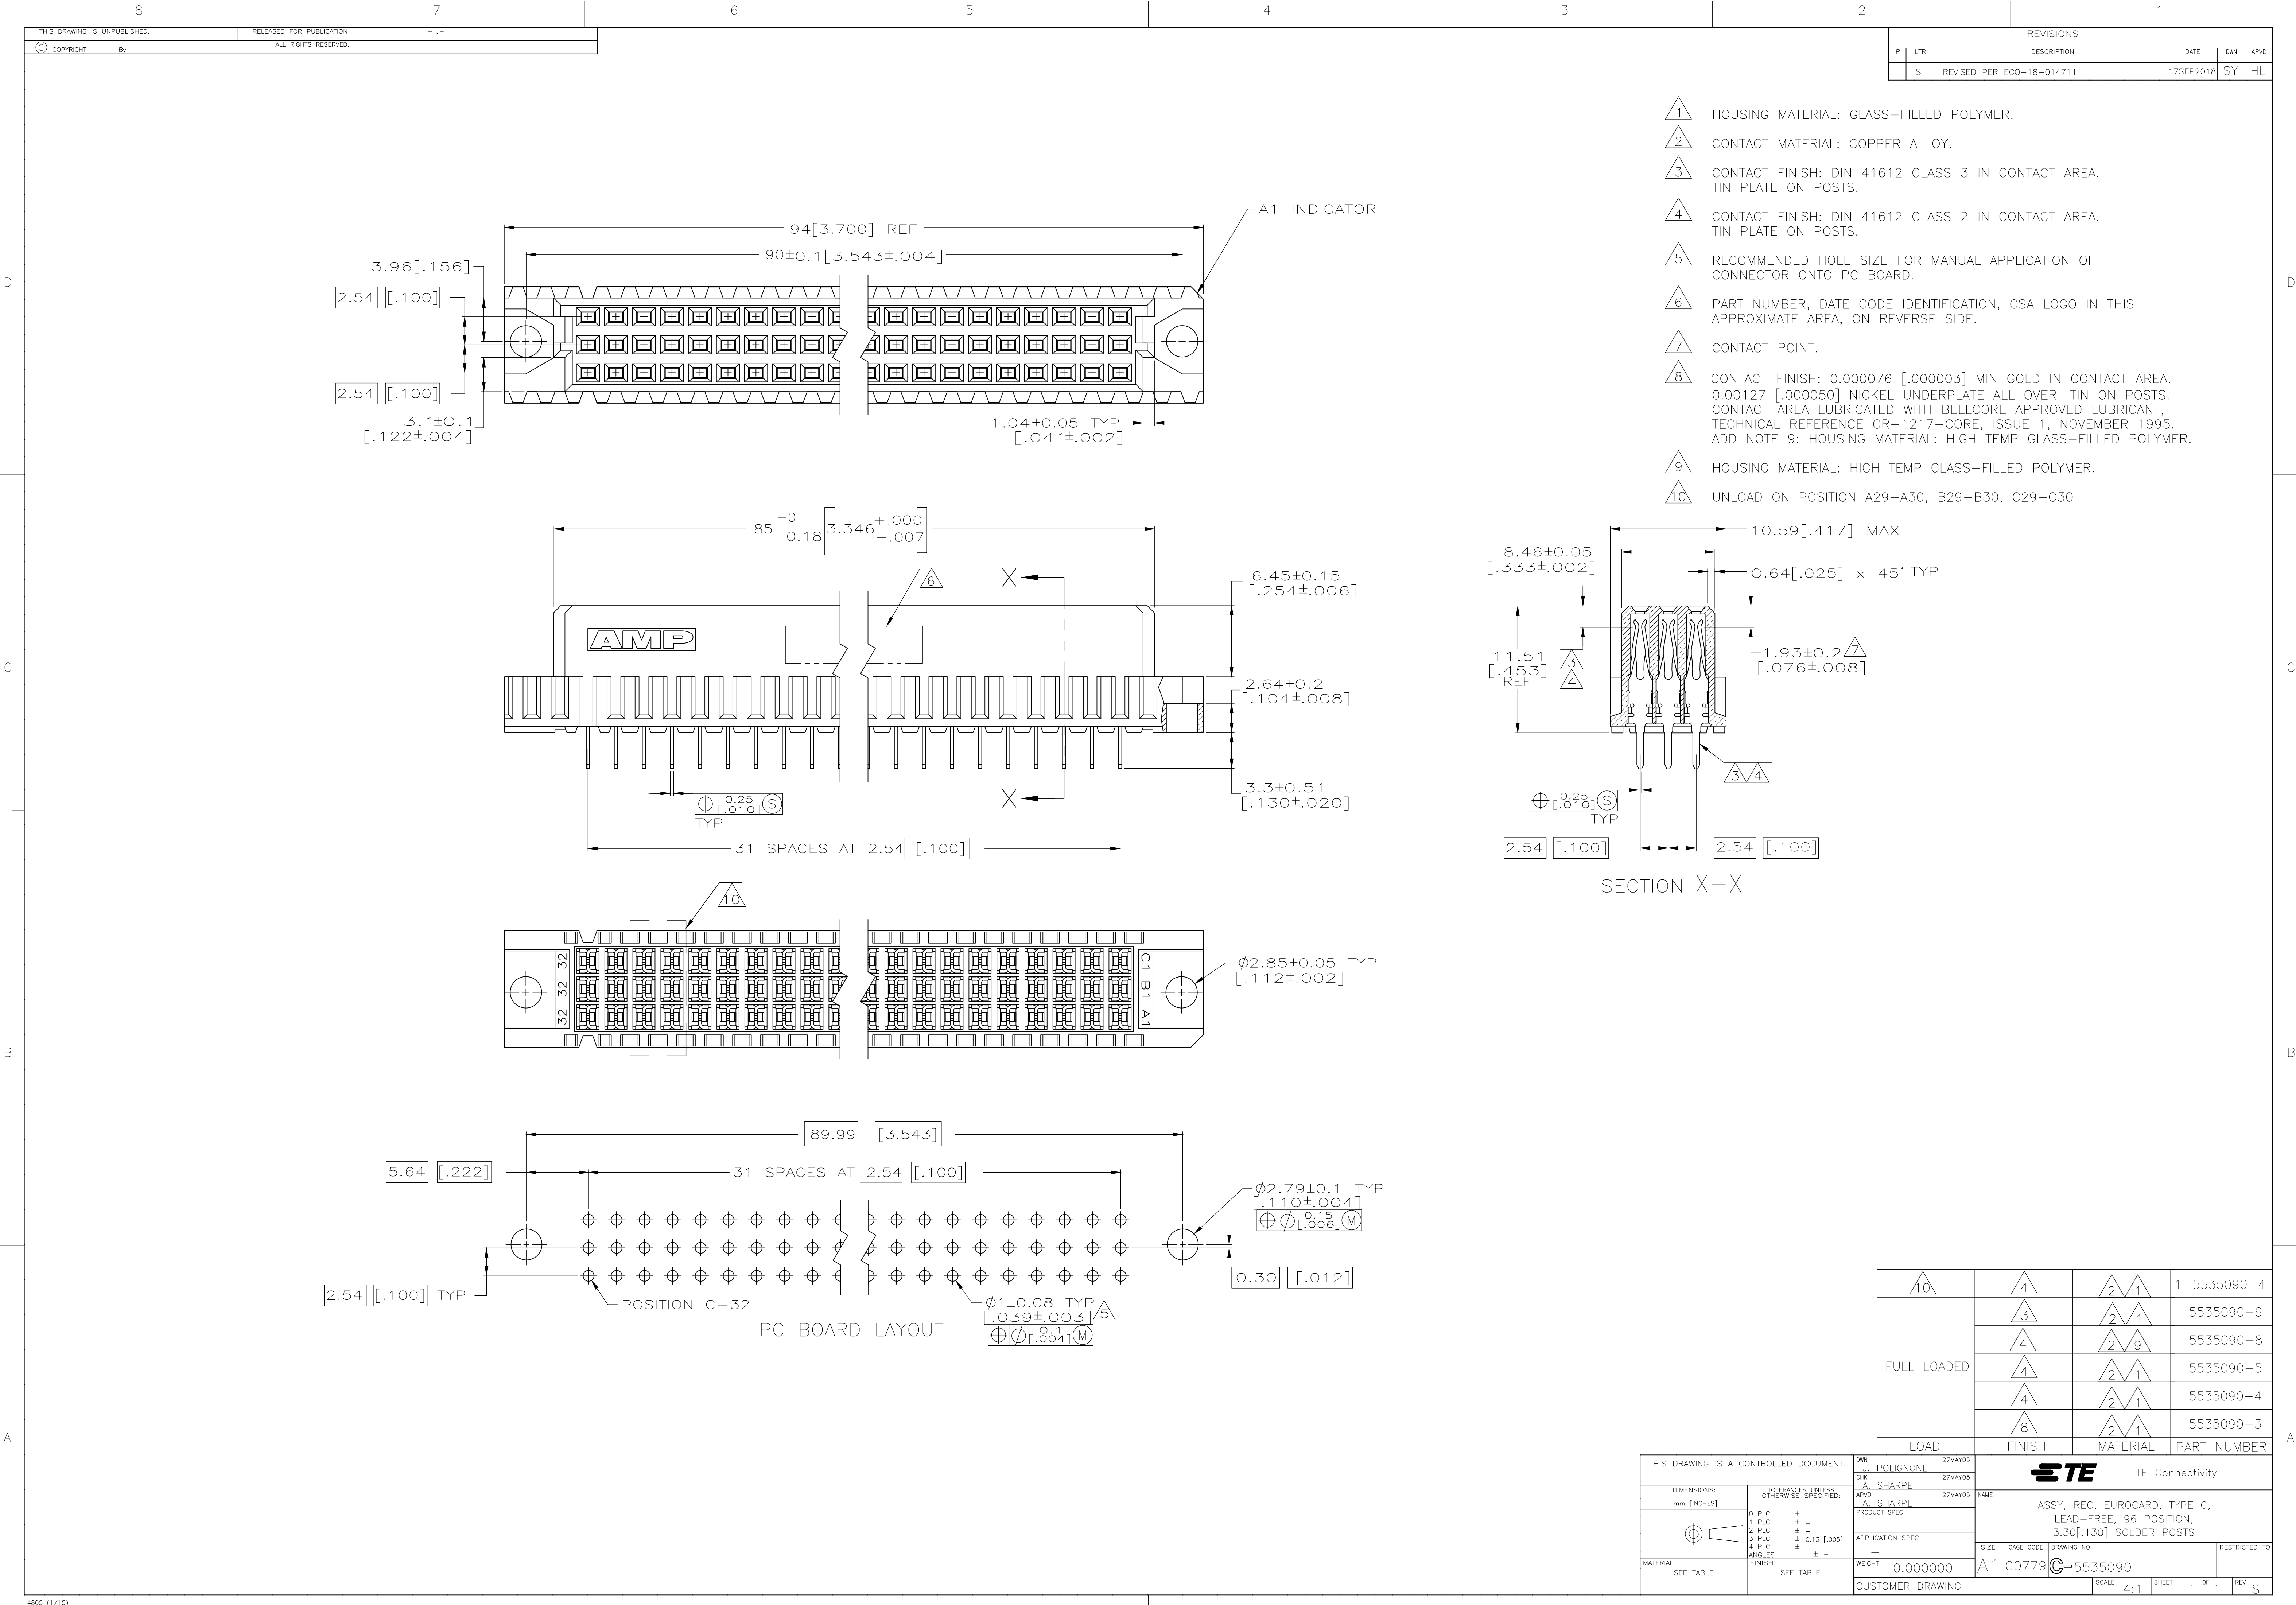

- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 CONTACT MATERIAL: COPPER ALLOY.
- 3 CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 5 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 6 PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA, ON REVERSE SIDE.
- 7 CONTACT POINT.
- 8 CONTACT FINISH: 0.000076 [0.000003] MIN GOLD IN CONTACT AREA. 0.00127 [0.000050] NICKEL UNDERPLATE ALL OVER. TIN ON POSTS. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT, TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995. ADD NOTE 9: HOUSING MATERIAL: HIGH TEMP GLASS-FILLED POLYMER.
- 9 HOUSING MATERIAL: HIGH TEMP GLASS-FILLED POLYMER.
- 10 UNLOAD ON POSITION A29-A30, B29-B30, C29-C30

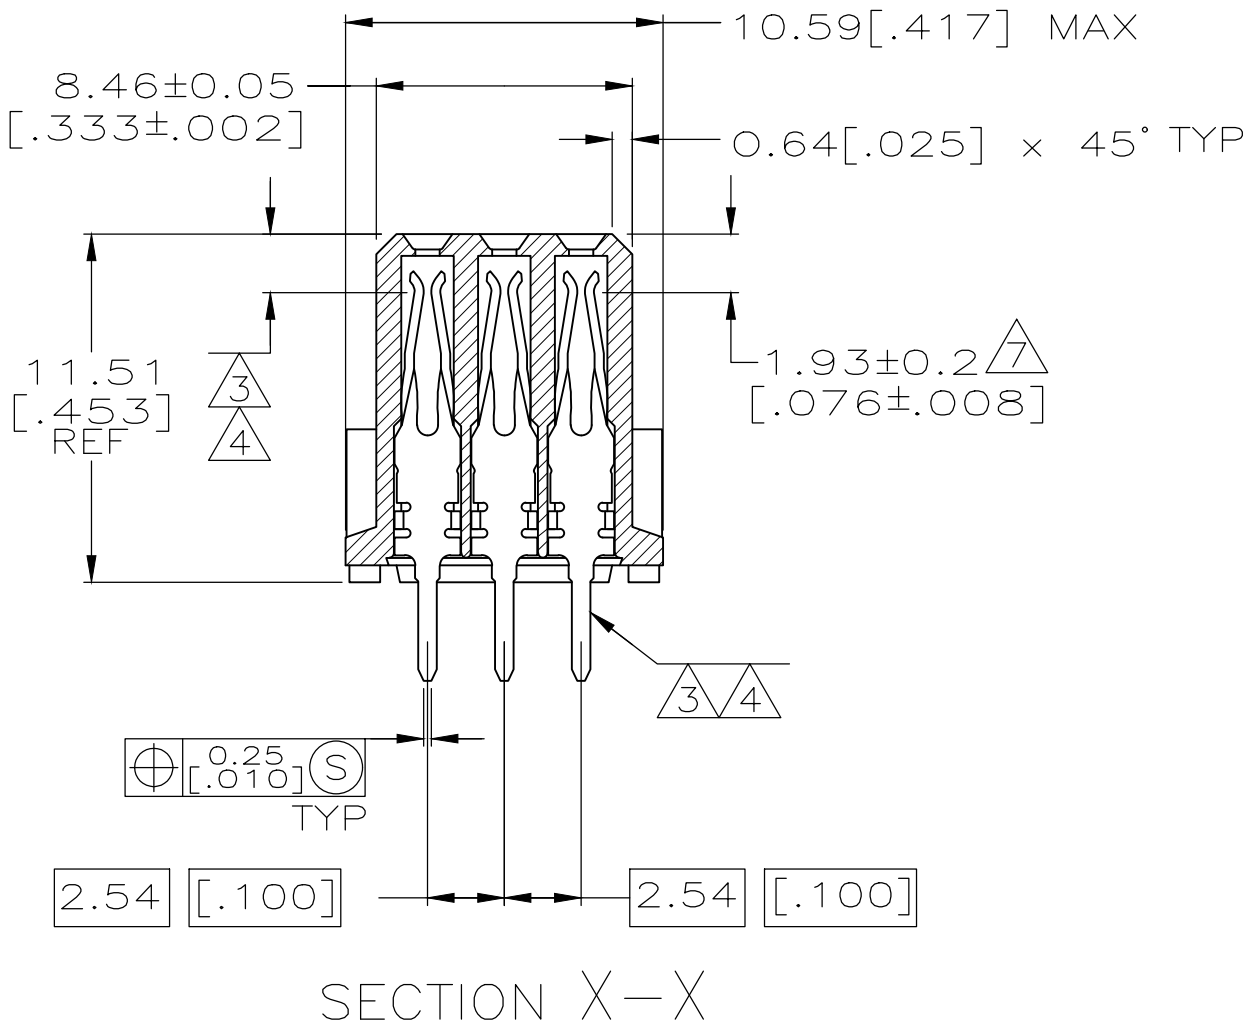

10	4	2 1	1-5535090-4
FULL LOADED	3	2 1	5535090-9
	4	2 9	5535090-8
	4	2 1	5535090-5
	4	2 1	5535090-4
	8	2 1	5535090-3
LOAD	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE 27MAY05	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK A. SHARPE 27MAY05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE 27MAY05	NAME	
0 PLC ± -		PRODUCT SPEC	ASSY, REC, EUROCARD, TYPE C, LEAD-FREE, 96 POSITION, 3.30 [0.130] SOLDER POSTS	
1 PLC ± -		APPLICATION SPEC		
2 PLC ± -		WEIGHT 0.000000	SIZE A1	CAGE CODE DRAWING NO
3 PLC ± 0.13 [0.005]		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1
4 PLC ± -				REV S
ANGLES ± -				
FINISH SEE TABLE				