
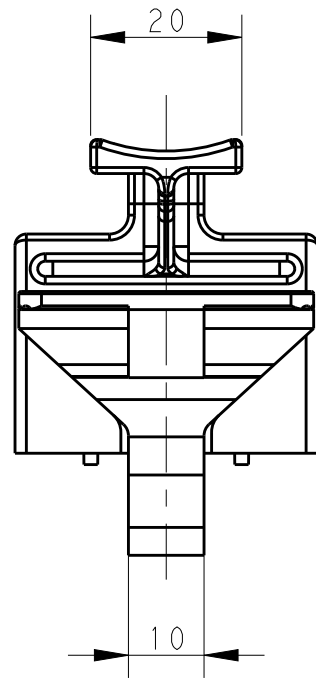
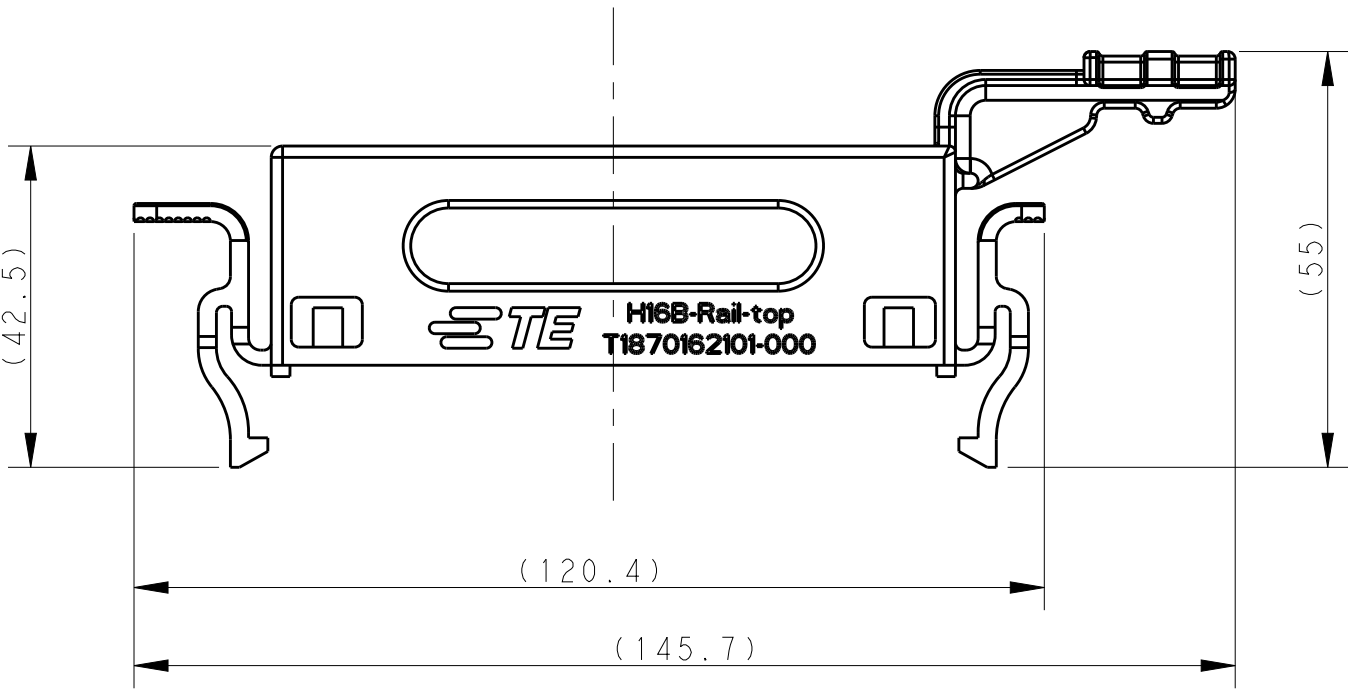
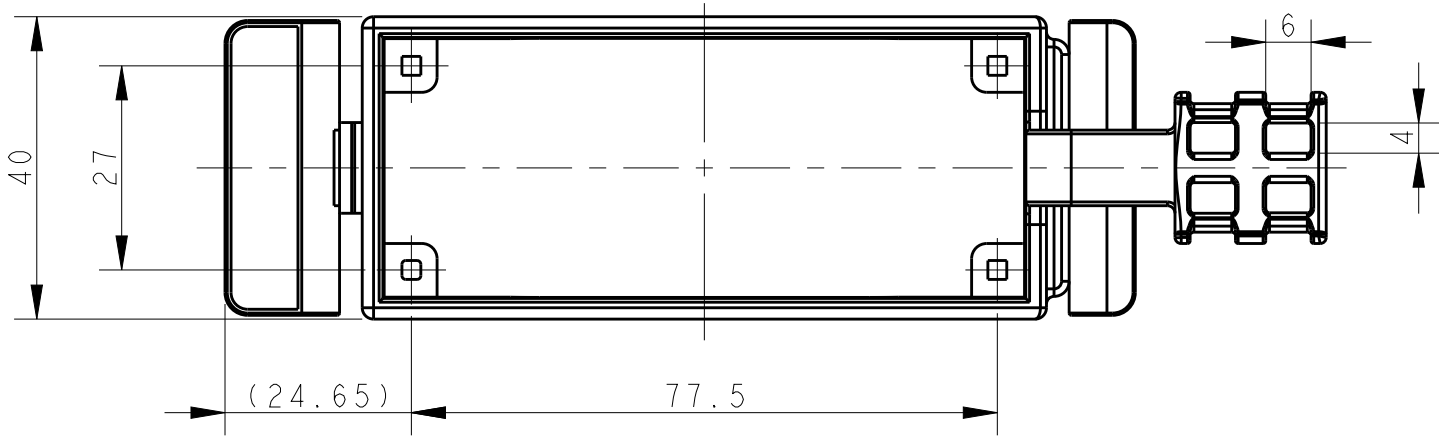


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	01FEB2016	DW	CW

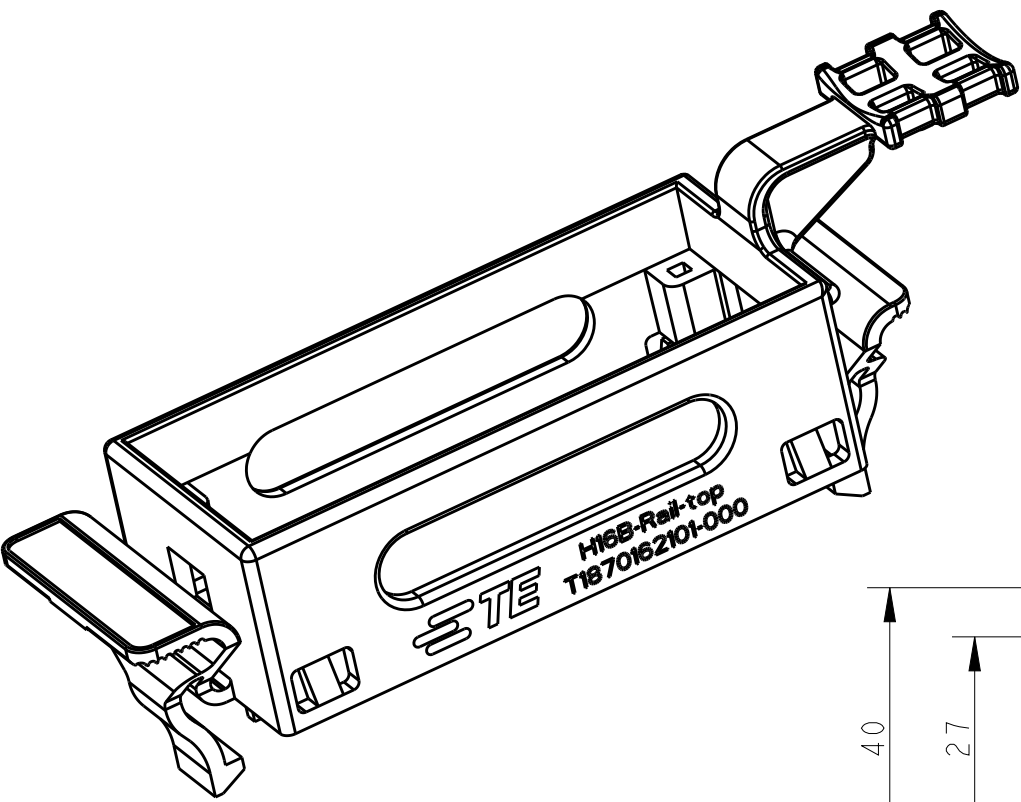


NOTES:

I. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
FLAMMABILITY: UL94V-0
OPERATION TEMPERATURE: -40°C~+125°C

注释:

I. 技术参数:
绝缘材料: PC
阻燃等级: UL94V-0
工作温度: -40°C~+125°C

T1870162101-000		H16B-RAIL-TOP		H16B INSERT MOUNTING TOP FRAME H16B.芯件导轨安装支架上部									
PART NUMBER 料 号		PART DESCRIPTION 描 述											
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01FEB2016 DAVID WANG		 TE Connectivity									
DIMENSIONS:		CHK 01FEB2016 CHRIS WANG											
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME H16B-RAIL-TOP									
		APVD 01FEB2016 XIANG XU		PRODUCT SPEC									
				-									
		APPLICATION SPEC		-									
				-									
MATERIAL		FINISH		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
-		-		-		A2		-		C-T1870162101000		-	
-		-		CUSTOMER DRAWING		SCALE		SHEET		OF		REV	
						1:1		1		1		A	