



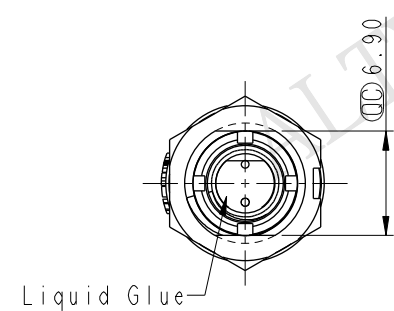
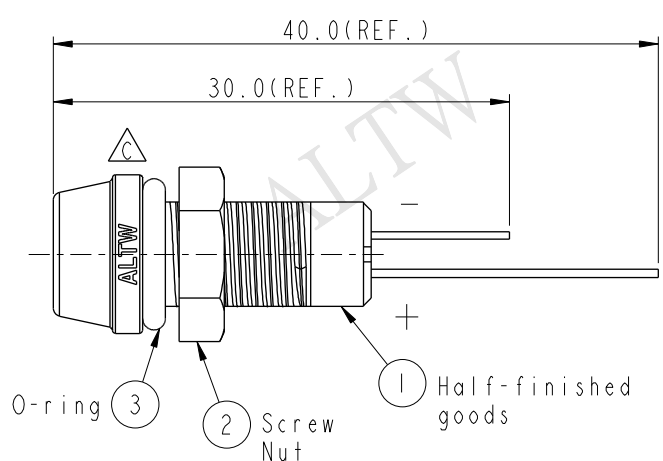


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930472	2009/03/04	ZhaoRongFu	Add Waterproof Rate
C	LEN1650816	2016/05/23	Ruru	Change Logo



Recommended Panel Cut-Out

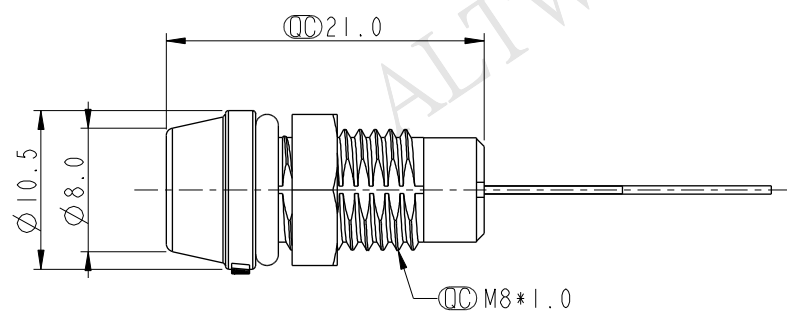

- Notes:
- * $\varnothing$ Important Dimension To Check
 - * Waterproof Rate: IP67
 - * LED Holder: PC+ABS, Black
 - * LED: $\varnothing$ 3 mm, Green (高亮度)
 - * O-ring: EPDM, Black
 - * Screw Nut: Nylon+GF
 - * Operating Voltage: DC 4V
 - * Operating Temperature: -40~+80°C
 - * For Panel Thickness 6.5mm Max.

UNIT: mm				TITLE Ø3mm Plastic LED ,Green		ITEM NO. L08-01GAAS-PR7001		DRAWN BY Ruru		DATE 2016-05-23	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1		SIZE A4		DWG NO. L08-01GAAS-PR7001		CHECKED BY Rita		DATE 2016-05-23	
REV. C		WC-REV. A.3		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Lisa		DATE 2016-05-23	
				QC: Inspection item						8 FMW10702-01-02A1	

Amphenol LTW
安費諾亮泰企業股份有限公司