


REVISIONS				DATE	APPROVED
ZONE	LTR	DESCRIPTION			
	C	CHANGE PER DCO 01075		1/24/80	Blair

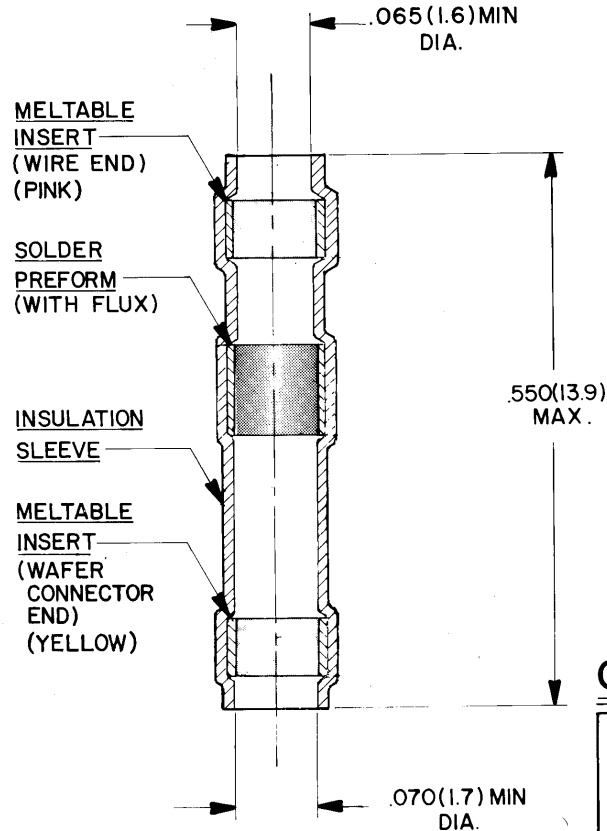

NOTES

1. MATERIALS

1-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.

1-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.

1-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAUGE TIN PLATED OR SILVER PLATED CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE:	DRAWN		SA LOPEZ	5-7-79	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025		
	CHECKED		<i>Pr</i>				
	APPROVED		<i>1/24/80</i>	5-7-79			
	APPROVED		<i>E. Steiner</i>	5-7-79			
.XXX: ± (M. M.)			APPROVED	<i>Steiner</i>	5-7-79	TITLE SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING 150°C(Sb5)MTC100 SERIES	
.XX: ± (M. M.)							
Δ: ±							
			SIZE	CODE IDENT	DWG. NO.	CTA-0025	
			B	NO. 06090			
PROJECT		6448-7055		WEIGHT	SHEET 1 OF 1		

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING