


SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE	24	Vdc	
OPERATING VOLTAGE RANGE	1 ~ 28	Vdc	
RATED CURRENT (MAX)	15	mA	
MINIMUM SPL @ 10 CM	95	dBA	
RESONANT FREQUENCY	2,900 ± 500	Hz	
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec	
OPERATING TEMPERATURE	-20 ~ +60	°C	
STORAGE TEMPERATURE	-30 ~ +70	°C	
HOUSING MATERIAL	NYLON	-	
TERMINAL MATERIAL	Ni PLATED COPPER	-	
WEIGHT	14	grams	
WEIGHT	14	granis	

THIS DOCUMENT CONTAINS DATA
PROPRIETARY TO PROJECTS UNLIMITED, INC.
ANY USE OR REPRODUCTION, IN ANY FORM,
WITHOUT PRIOR WRITTEN PERMISSION OF
PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

	REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	5/18/2006		
Α	ADDED SNAP IN DIMENSION	11/21/2007	B.R.	
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	3/06/2008	B.R.	

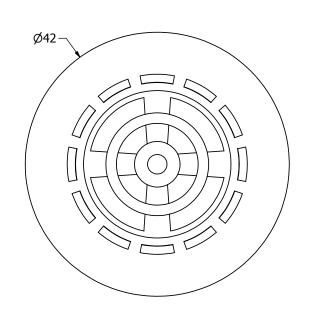

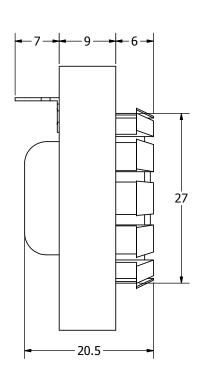

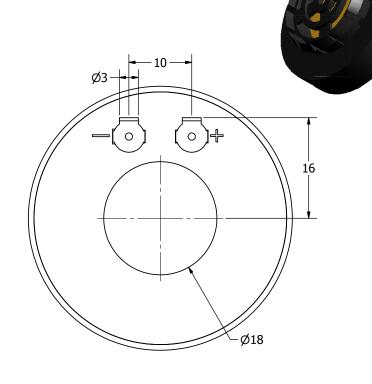

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

	UNLESS OTHERWISE SPECIFIED:	OLZE
	DIMENSIONS ARE IN MILLIMETERS,	SIZE
	TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3
AI-4230-S-C24-R.idw		C24-R.idw

J.D.	5/18/2006	L
	pui,	
	a projects unlimited co) Inc ompany

Designed by

Checked by	Date	Approved by	Date	Drawn Date	
E.P.	5/18/2006	B.R.	5/18/2006	3/6/2008	
AI-4230-S-C24-R					

Indicator Edition Sheet 1 / 1