

NOTES:

1. MATERIALS AND FINISHES:
BNC STR CRIMP PLUG- BRASS, NICKEL PLATING
CABLE - BELDEN 4855R


2. ELECTRICAL:
A. IMPEDANCE: 75 OHM

3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-850-187-XXX AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	05-May-17	3682	BMG

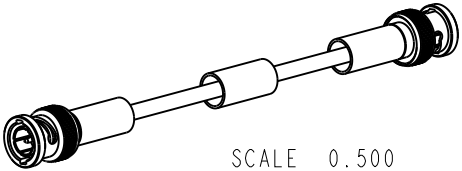

SCALE 0.500

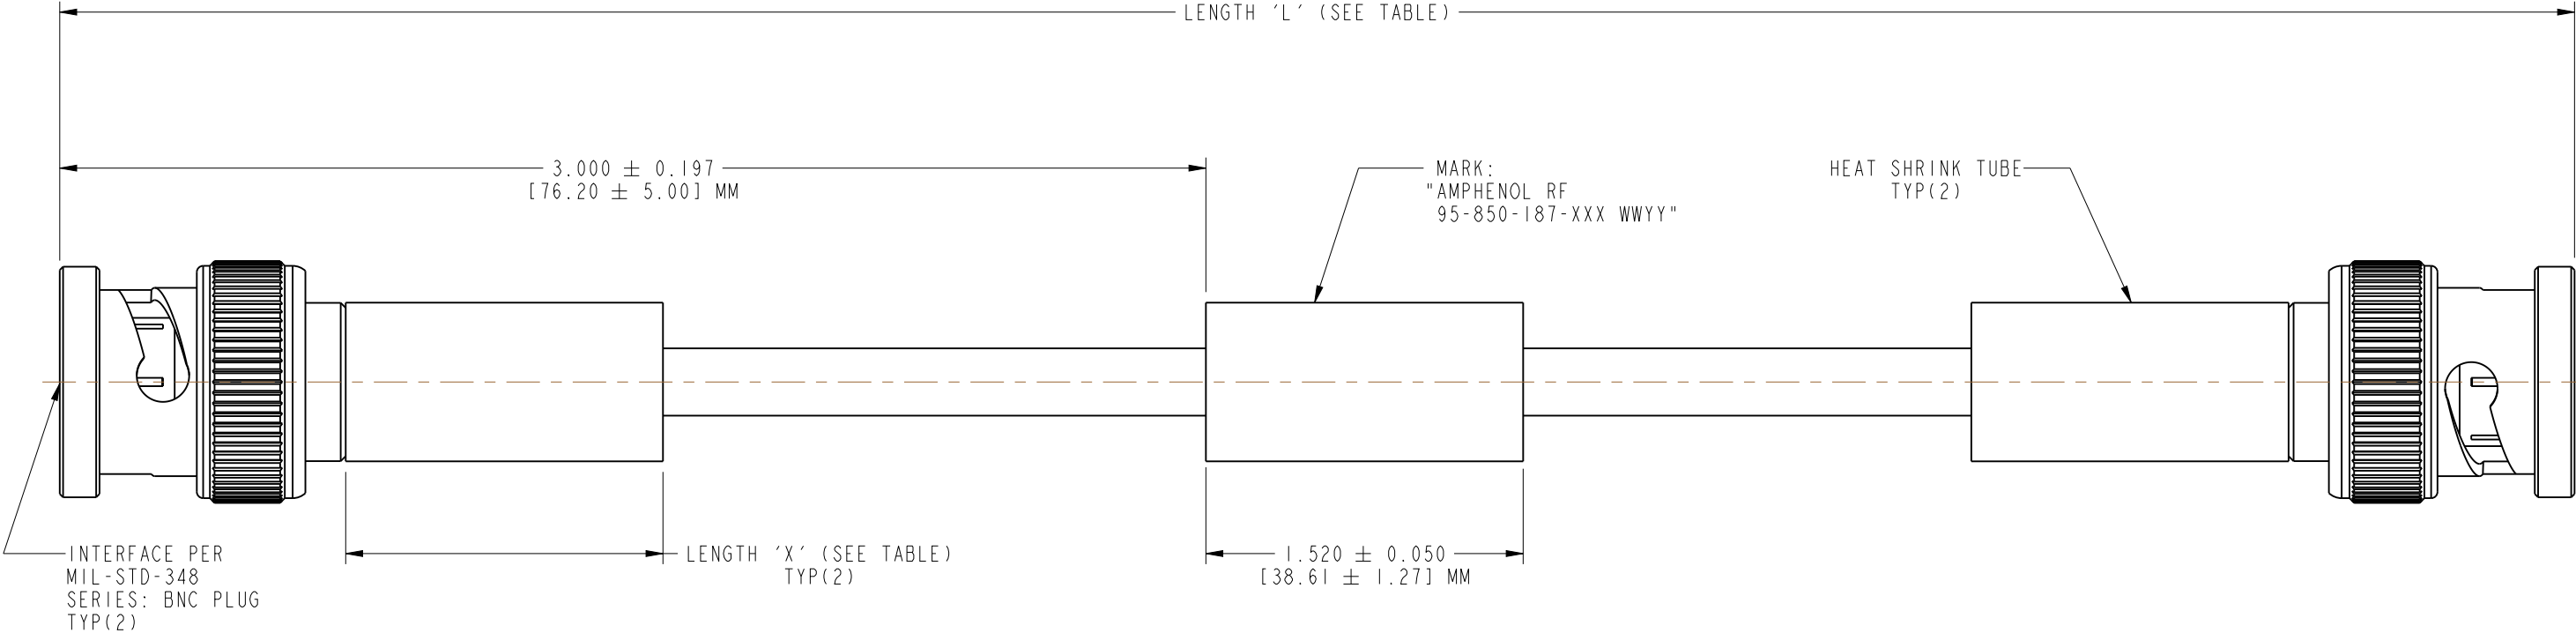

LENGTH 'L' (SEE TABLE)

3.000 ± 0.197
[76.20 ± 5.00] MM

MARK:
"AMPHENOL RF
95-850-187-XXX WWYY"

HEAT SHRINK TUBE
TYP(2)

INTERFACE PER
MIL-STD-348
SERIES: BNC PLUG
TYP(2)

LENGTH 'X' (SEE TABLE)
TYP(2)

1.520 ± 0.050
[38.61 ± 1.27] MM

DESIGN REQUIREMENTS:

☒ FREQUENCY : DC TO 12 GHz

☒ CONTINUITY

☐ VSWR : 1 MAX

☒ HI-POT: 250 VRMS

☐ INS. LOSS : dB MAX

☐ OTHER

LENGTH TABLE

PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [METERS]	LENGTH 'X' IN INCHES [METERS] MIN
95-850-187-006	-	6.00 [0.152]	0.75 [0.019]
-	95-850-187M025	9.84 [0.250]	
95-850-187-012	-	12.00 [0.305]	
95-850-187-018	-	18.00 [0.457]	1.50 [0.038]
-	95-850-187M050	19.69 [0.500]	
95-850-187-024	-	24.00 [0.610]	
-	95-850-187M075	29.53 [0.750]	
95-850-187-036	-	36.00 [0.914]	
-	95-850-187M100	39.37 [1.000]	
95-850-187-048	-	48.00 [1.219]	
-	95-850-187M200	78.74 [2.000]	
-	95-850-187M400	157.48 [4.000]	

TOLERANCE TABLE

LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES
±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
SEE NOTES

REFERENCE
EAR # 7622

CONFIGURATION LEVEL: In Work

FINISH

DRAWN
LOKESH P

ENGINEER
LOKESH P

APPROVED
K. CAPOZZI

CAD FILE

DATE
24-Mar-17

DATE
24-Mar-17

DATE
05-May-17

TITLE
BNC STR CRIMP PLUG TO
BNC STR CRIMP PLUG
USING BELDEN 4855R
CABLE, VARIOUS LENGTH

SCALE: 2.5:1.0

SHEET 2 OF 2

DWG SIZE
B

REV
A

Amphenol RF
www.amphenolrf.com

DRAWING NO.95-850-187-XXX

ITEM NO.95-850-187-XXX

PART NO.95-850-187-XXX