



**RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN**

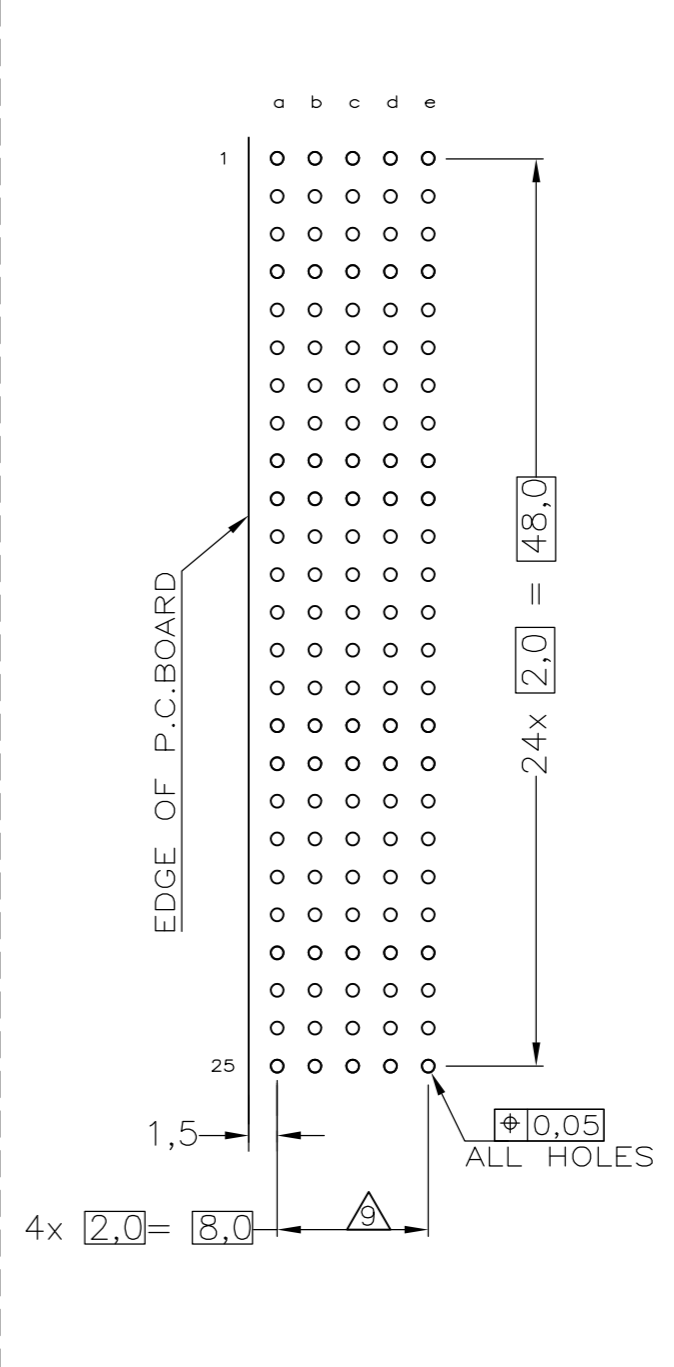

CONTACT LAYOUT

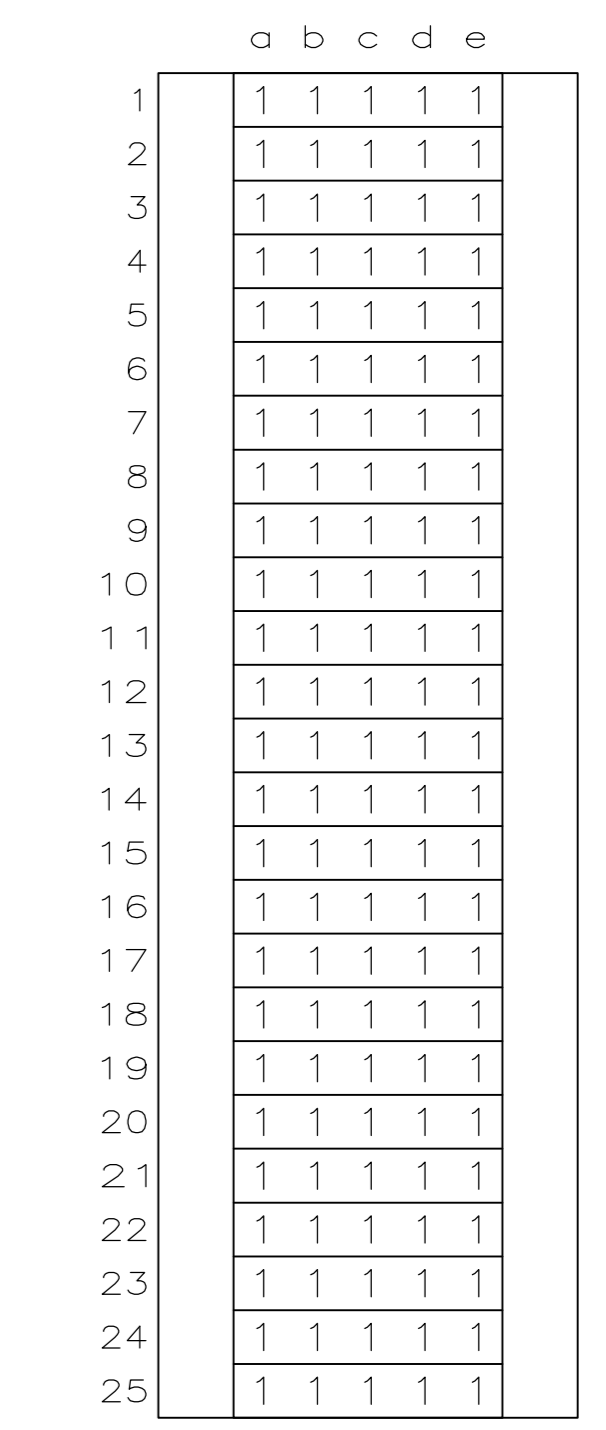

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

- NOTES:**
- 1 MATERIAL HOUSING : GREY GLASSFILLED POLYESTER
UL-RATING V0
CONTACT : PHOSPHORBRONZE
 - 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
 - 7 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - 8 CONNECTOR MARKED WITH PARTNUMBER AND DATECODE
 - 9 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - 11 CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.
 - 12 0,76µm MIN. GOLD PLATING AT MATING SURFACE
 - 13 1,27µm MIN. GOLD PLATING AT MATING SURFACE

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		N		ECR-15-004302	23MAR2015	F.L	F.Y

N	2, 4, 13	5-106014-0
N	2, 3, 12	3-106014-0
Y	2, 6	1-106014-9
N	2, 3	1-106014-1
Y	2, 3	106014-9
N	2, 4	106014-4
N	2, 3	106014-1
CONSERVATION TREATMENT		PARTNUMBER
CONTACT FINISH		PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: L.v.d.HEIJDEN 15DEC97
CHK: D. TRUREN 15DEC97
APVD: F.v.KONINGSBRUGGE
PRODUCT SPEC: 108-19082
APPLICATION SPEC: 114-19029

MATERIAL: - FINISH: - WEIGHT: -

TE Connectivity

Z-PACK 2MM HM TYPE B
125 POS. RIGHT ANGLE MALE
CONNECTOR ASSEMBLY

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=106014 RESTRICTED TO: -
SCALE: NTS SHEET: 1 of 1 REV: N