

Housing - HC-EVO-B10-HHFD-2B-PL-BK - 1411495

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing B10, For double locking latch, Material: Polyamide, Cable outlets: 2, straight/Lateral, Height: 87.5 mm, Cable gland: none, Gland: no, Standard

Product Features

- ✓ Flexible cable outlet direction, lateral or straight
- ✓ Lower costs than metal version
- ✓ Labeling option using 9 x 20 mm marking label
- ✓ Low weight
- ✓ Lower risk of condensation
- ✓ Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- ✓ Metal inlays ensure leading PE contact with angled plugs
- ✓ Completely corrosion-resistant
- ✓ Halogen-free plastic
- ✓ Impact test according to IK 08
- ✓



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	80.0 GRM
Custom tariff number	85389099
Country of origin	Poland

Technical data

Dimensions

Height	87.5 mm
--------	---------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (static)
---------------------------------	----------------------------

Housing - HC-EVO-B10-HHFD-2B-PL-BK - 1411495

Technical data

General

Note	for contact inserts HC-B10, BB18, DD42, M, K8/24, HV03
Type	B10
Inflammability class according to UL 94	V0
Locking type	For double locking latch
Pg screw connection	none
Cable exit	straight
	Lateral
Housing material	Polyamide
Ambient temperature (operation)	-40 °C ... 125 °C (static)

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143423
eCl@ss 8.0	27440202

ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC000437

Approvals

Approvals

Approvals

GL / EAC

Ex Approvals

Approvals submitted

Approval details

GL


Housing - HC-EVO-B10-HHFD-2B-PL-BK - 1411495

Approvals

EAC

Drawings

Dimensional drawing

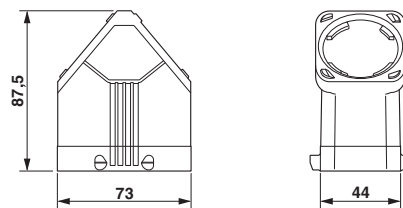

Dimensional drawing