


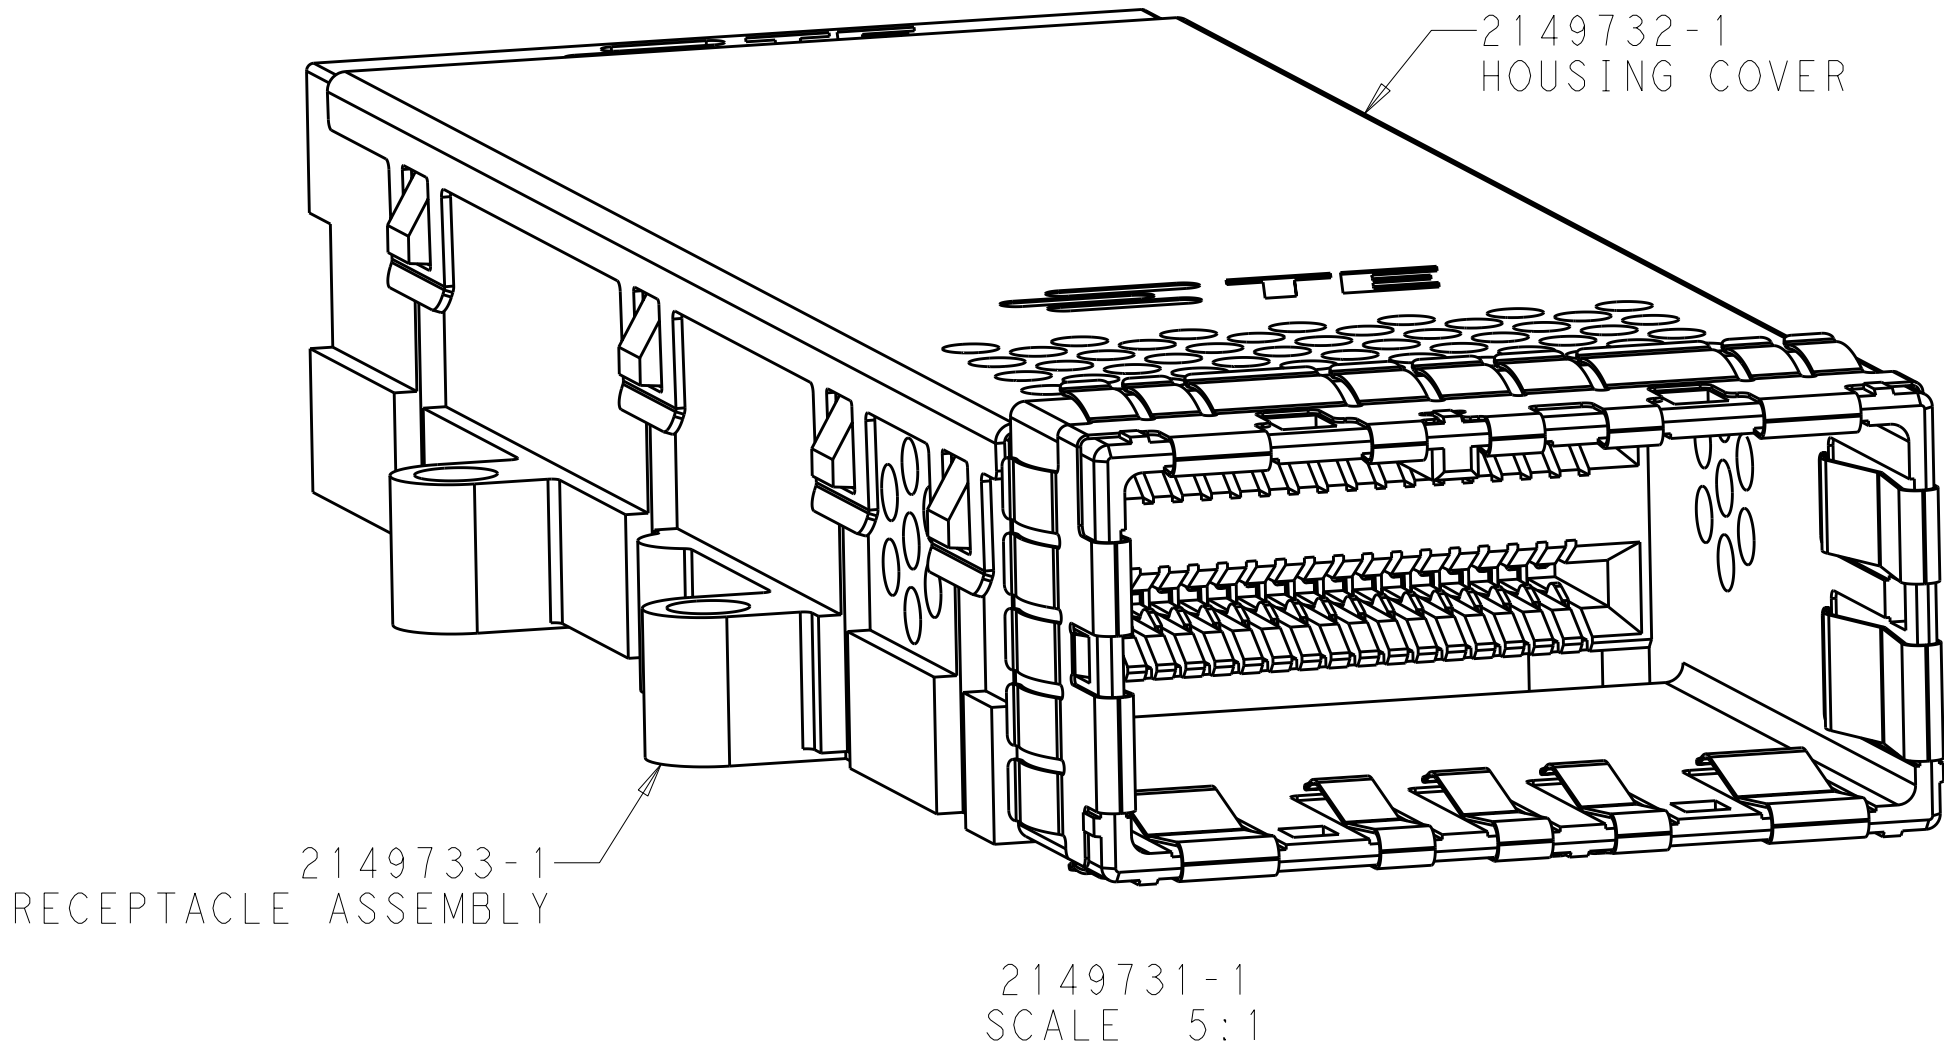

- PARTS PACKAGED UNASSEMBLED
- PCB THICKNESS = 1.44 MIN
- △ THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY CROSSHATCHING, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN, CROSSHATCHING TO BE CONDUCTIVE
- MOUNTING HARDWARE REQUIRED:
M2X0.4 (4): MOUNTING SCREW LENGTH = BOARD THICKNESS + 8mm MAX
- △ FEATURES IN PHANTOM LINES ARE RELATED TO USE WITH CONNECTOR, PN 2149699-X AND GANGED SIDE BY SIDE APPLICATION
- MATERIALS:
HOUSING - NICKEL PLATED ZINC ALLOY PER ASTM B 240
RECEPTACLE HOUSING - LCP, BLACK, UL 94V-O RATED
CHICKLET - LCP, BLACK, UL 94V-O RATED
CONTACT - PHOSPHOR BRONZE PER ASTM B 103
EMI SPRING - COPPER ALLOY
- △ CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF TYCO ELECTRONICS
PRODUCT SPECIFICATION 108-2426, BASED ON EIA/ECA-364-1000.01A,
(CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE,
TIN ON NEEDLE EYE
- △ NOTE DELETED

OBSELETE

2149733-2	△8	84 POSITION RECEPTACLE ASSEMBLY WITH COVER	2149731-2
2149733-1	△7	84 POSITION RECEPTACLE ASSEMBLY WITH COVER	2149731-1
84 POSITION RECEPTACLE ASSEMBLY	FINISH	DESCRIPTION	PART NUMBER

PRELIMINARY PART- NOT RELEASED FOR PRODUCTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. COWHER 22SEP2010	TE Connectivity PRELIMINARY RECEPTACLE ASSEMBLY WITH COVER, BELLY-BELLY, EXTENDED, 84 POSITION, CXP									
DIMENSIONS:		CHK M.D. MORRISON 22SEP2010										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.D. MORRISON 22SEP2010										
mm		NAME										
	0 PLC	±0.2	PRODUCT SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
	1 PLC	±0.1	APPLICATION SPEC									
	2 PLC	±0.05	-		A200779		C-2149731		-			
	3 PLC	±	-									
	4 PLC	±	-		CUSTOMER DRAWING		SCALE		SHEET		REV	
	ANGLES	±1°	WEIGHT									
	MATERIAL	FINISH	-									

