
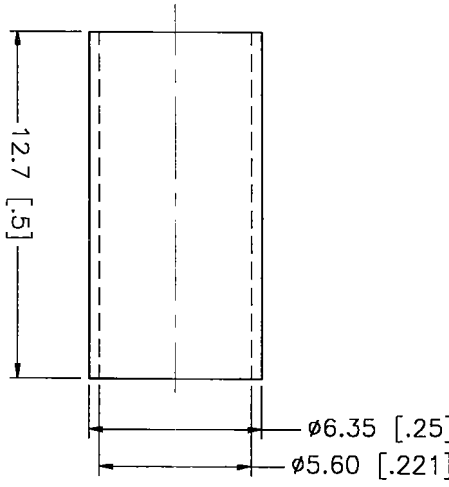
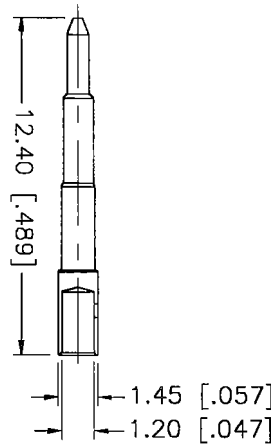
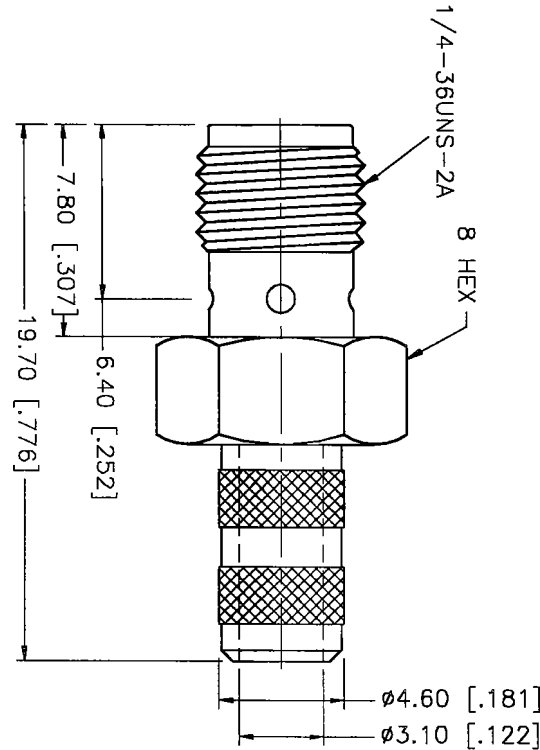


REV.	DATE	DESCRIPTION
NC	07/11/00	INITIAL RELEASE

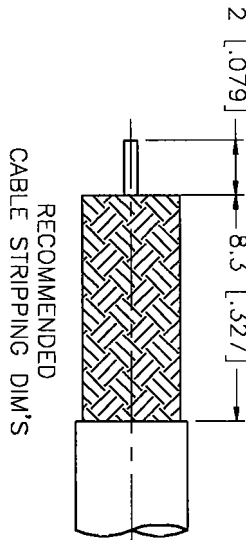

*Crimp Ferrule
Hex CR Size .213*

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS		DATE	 Connex Connector Corporation SMA REVERSE POLARIZED CRIMP JACK (FOR TIMES LMR-200)					REV.				
1 BODY	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4		DRAWN	G.R.S.	07/11/00						TITLE	SIZE	FSCM NO.	DWG. NO.	NC
2 INSULATOR	TEFLON	NATURAL			CHECKED												
3 CONTACT PIN	BRASS	GOLD			ISSUED												
4 FERRULE	COPPER	GOLD															
5																	
6																	
7																	
8			DO NOT SCALE DRAWING														