




# Snap-In Phono Jacks

161-0096-E, 161-0097-E, 161-0098-E, 161-0099-E




Snap-In Phono Jacks

161-0096-E, 161-0097-E, 161-0098-E, 161-0099-E

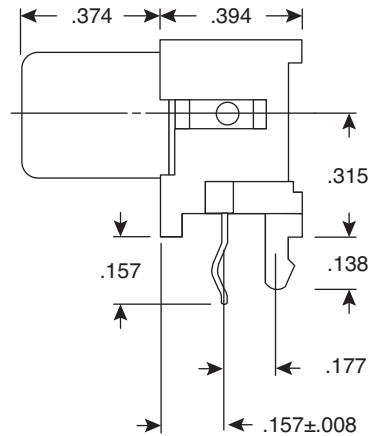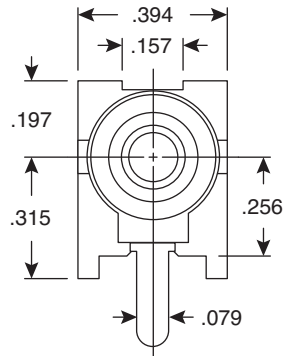

PCB Hole Layout



Circuit Diagram

Dimensions: In.

## SPECIFICATIONS

|                               |                            |
|-------------------------------|----------------------------|
| <b>Type:</b>                  | Snap-In Mount Phono        |
| <b>Dielectric Strength:</b>   | 500VAC for 1 Minute        |
| <b>Insulation Resistance:</b> | 100MΩ @ 500VDC             |
| <b>Contact Resistance:</b>    | 30mΩ max. @ 1A/500VDC      |
| <b>Housing:</b>               | Reinforced Glass Fiber     |
| <b>Sleeve:</b>                | Nickel Plated Steel        |
| <b>Tip Contact:</b>           | Nickel Plated Spring Brass |
| RoHS Compliant                |                            |

| MOUSER STOCK NO. | Insulator Color |
|------------------|-----------------|
| 161-0096-E       | Red             |
| 161-0097-E       | Black           |
| 161-0098-E       | White           |
| 161-0099-E       | Yellow          |

Date Last Revised: 8-24-06

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-301054