


Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

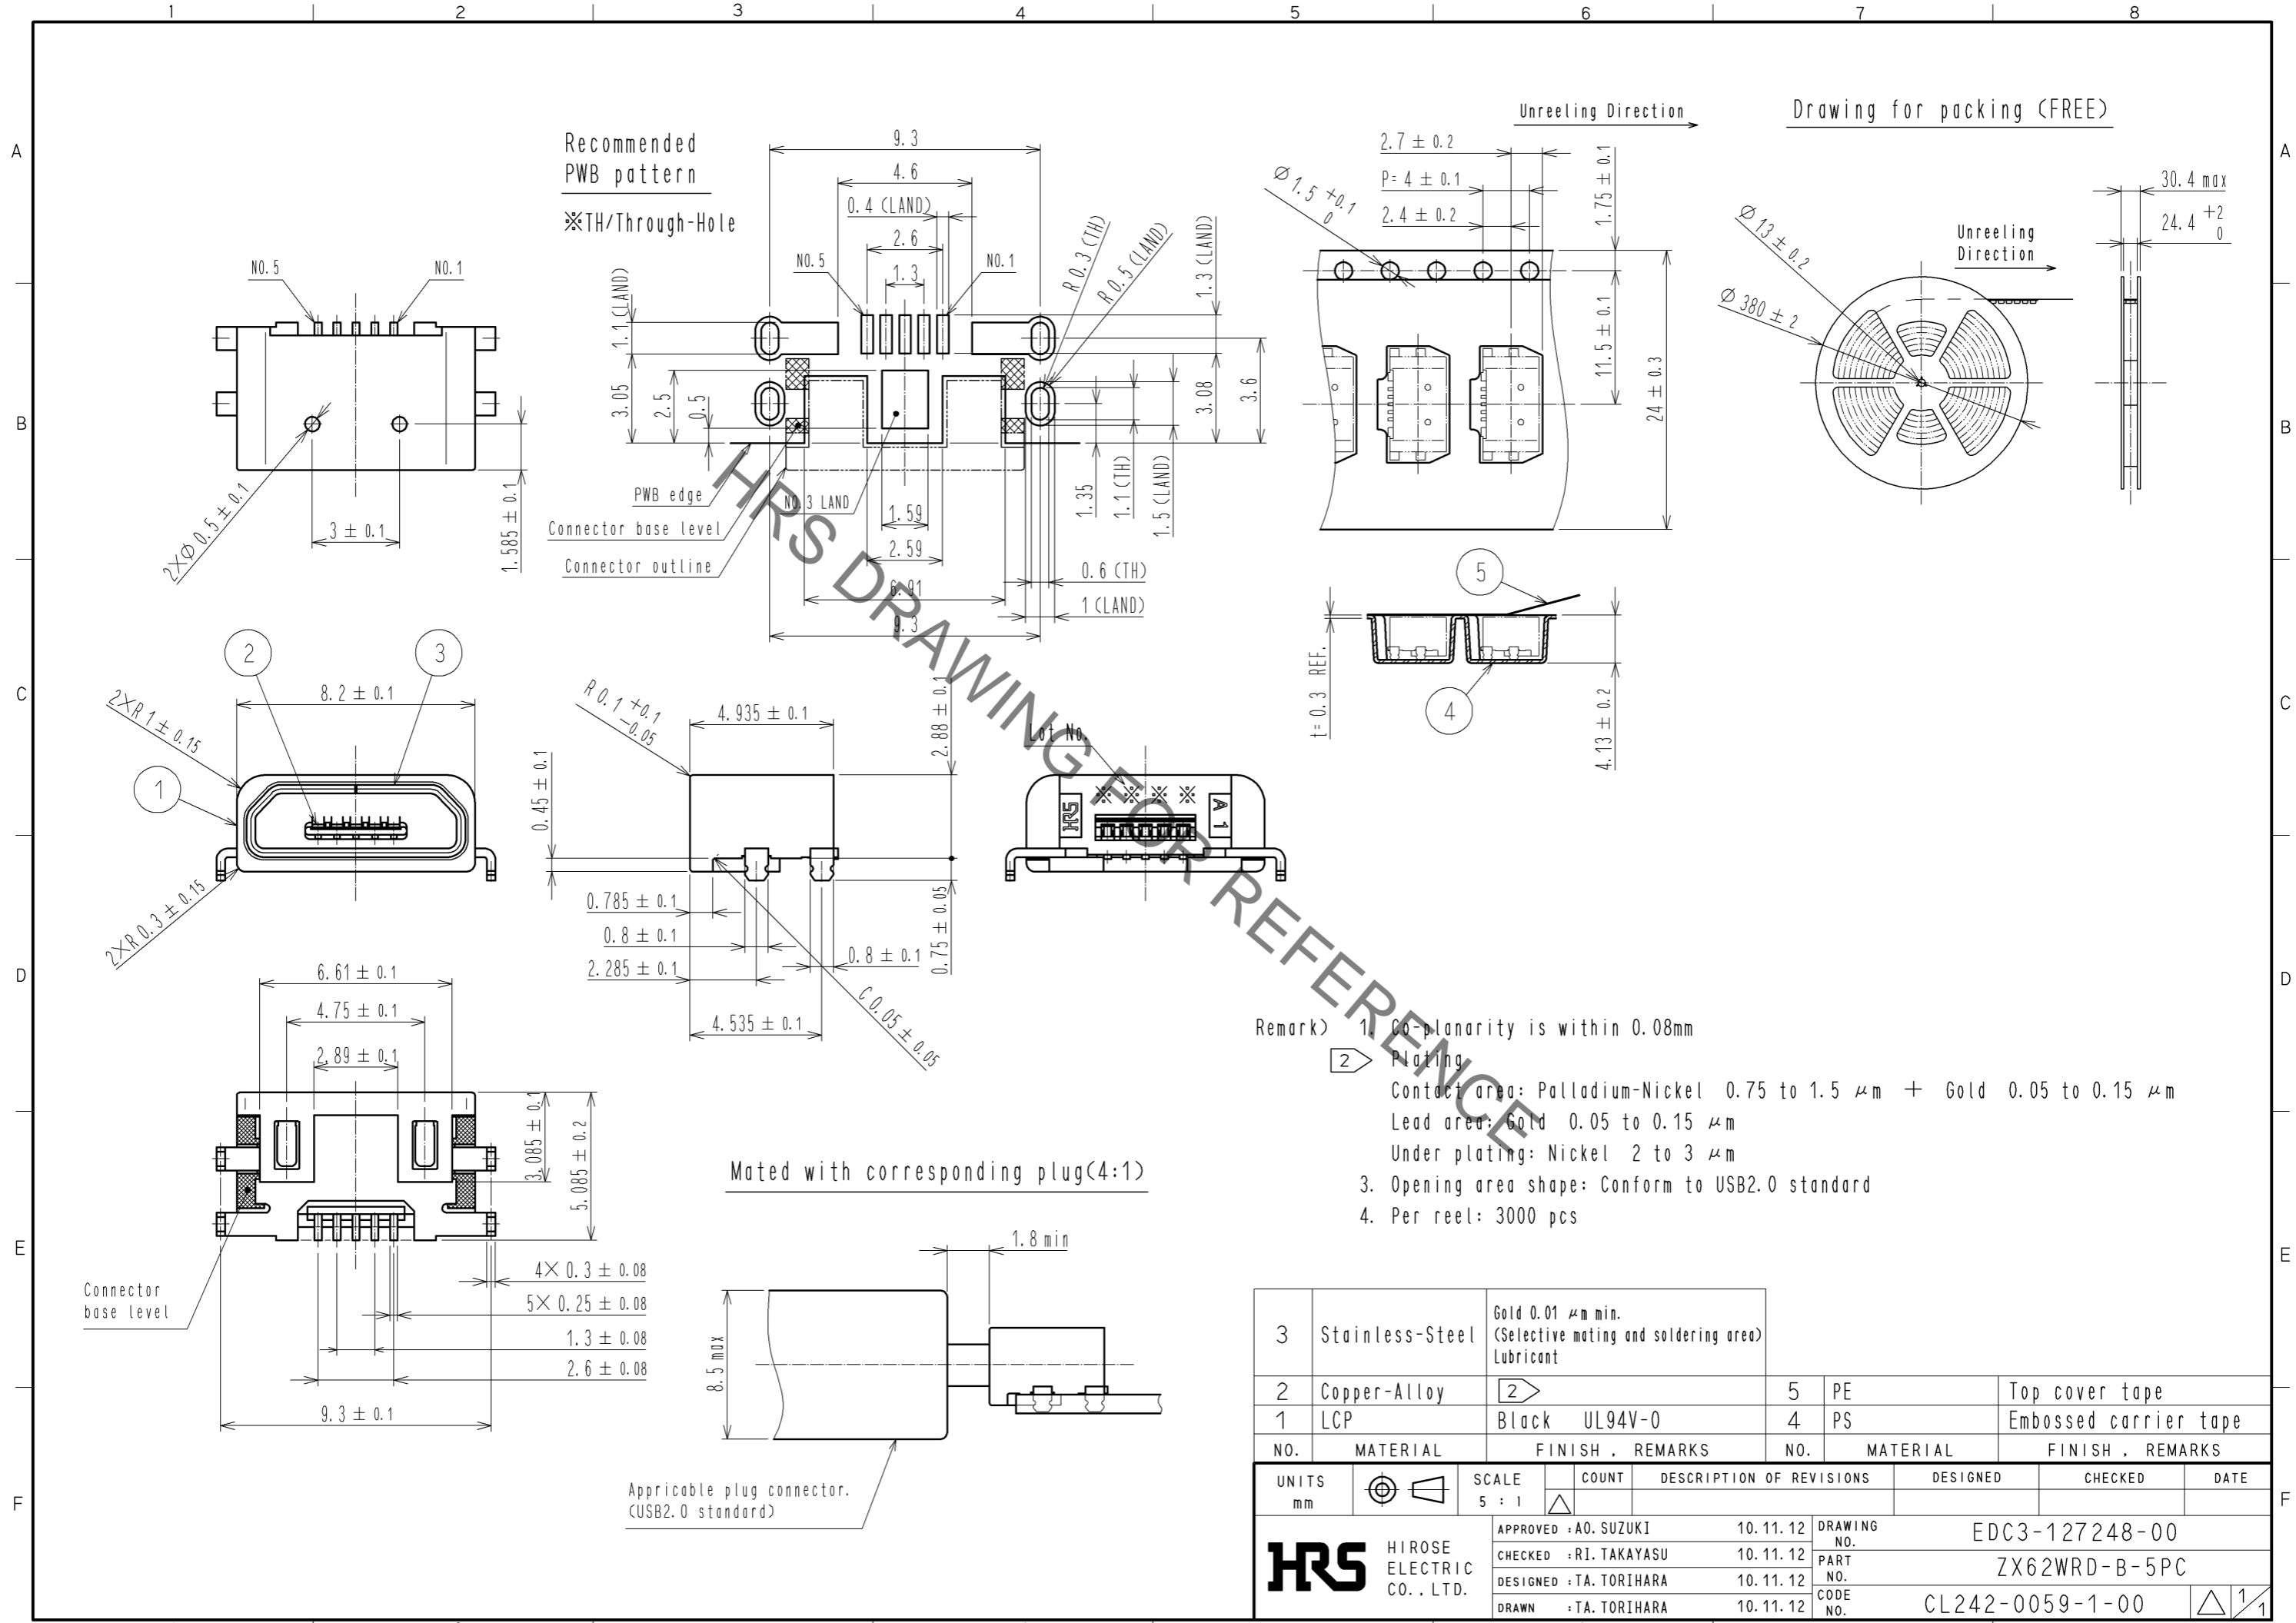

Remark) 1. Co-planarity is within 0.08mm
 2. Plating
 Contact area: Palladium-Nickel 0.75 to 1.5 µm + Gold 0.05 to 0.15 µm
 Lead area: Gold 0.05 to 0.15 µm
 Under plating: Nickel 2 to 3 µm
 3. Opening area shape: Conform to USB2.0 standard
 4. Per reel: 3000 pcs

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Stainless-Steel	Gold 0.01 µm min. (Selective mating and soldering area) Lubricant		5	PE		Top cover tape
2	Copper-Alloy	2		4	PS		Embossed carrier tape
1	LCP	Black	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

APPROVED : A0. SUZUKI	10.11.12	DRAWING NO.	EDC3-127248-00
CHECKED : RI. TAKAYASU	10.11.12	PART NO.	ZX62WRD-B-5PC
DESIGNED : TA. TORIHARA	10.11.12	CODE NO.	CL242-0059-1-00
DRAWN : TA. TORIHARA	10.11.12		