

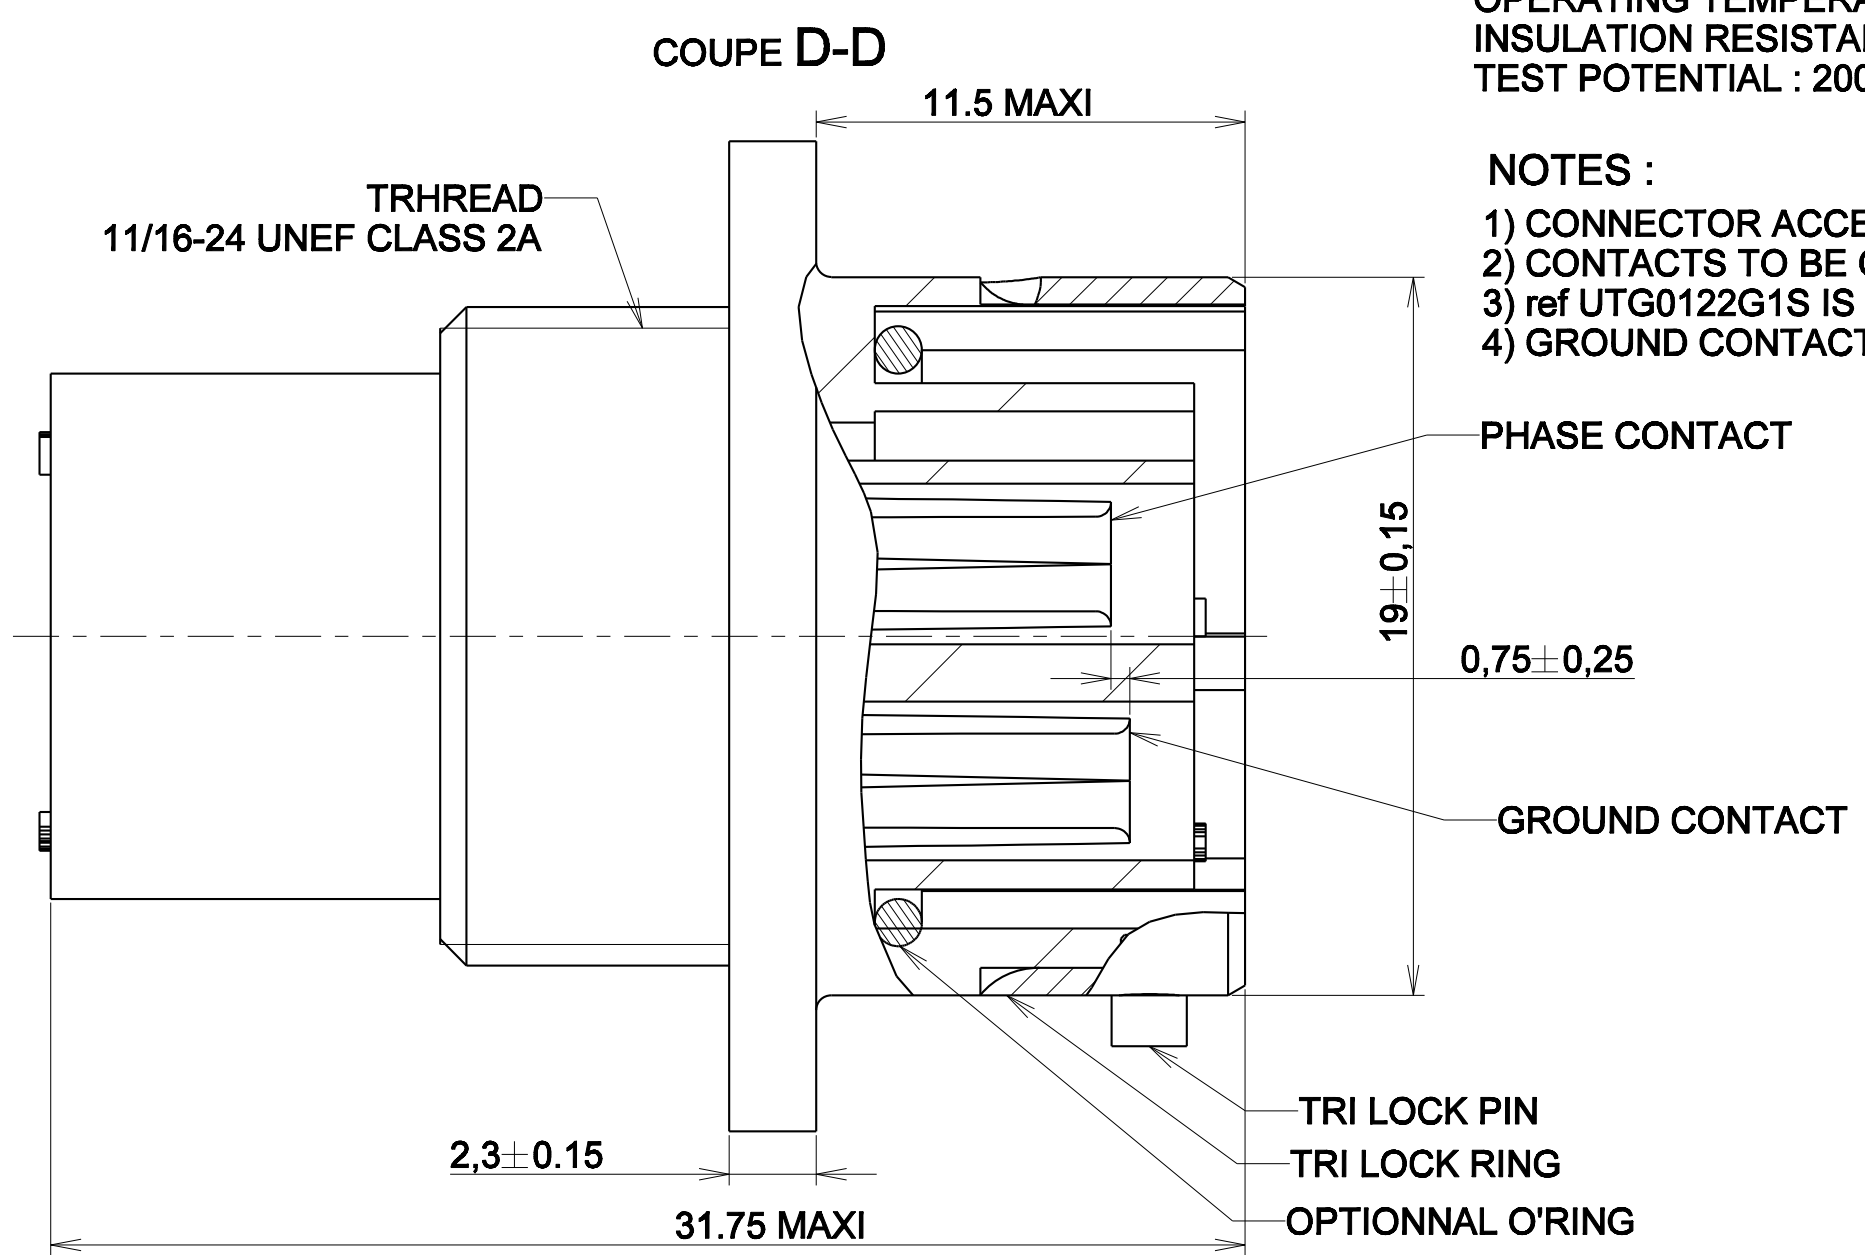


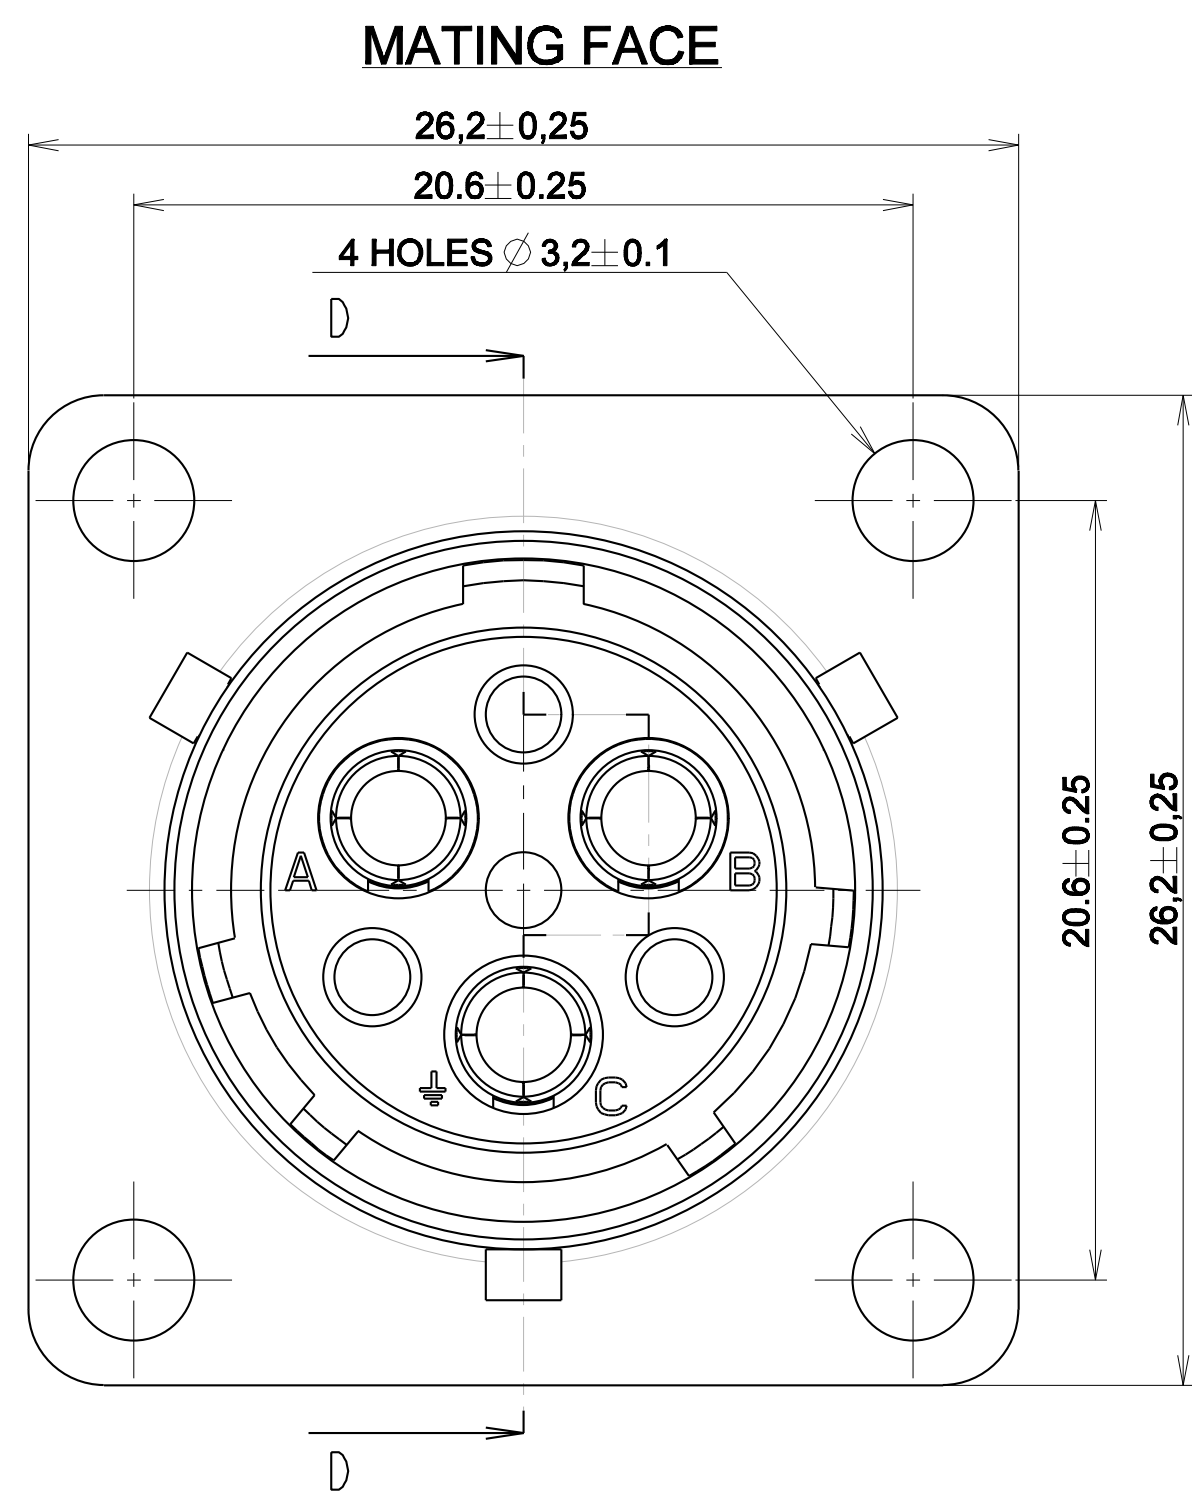

MATERIAL :
BODY : GLASS FILLED POLYESTER COLOUR BLACK
TRILOCK RING : BRASS ALLOY -NICKEL PLATED
TRILOCK PIN : STAINLESS STEEL

PERFORMANCE CHARACTERISTICS:
OPERATING TEMPERATURE : -55°C TO 125°C
INSULATION RESISTANCE : 5000 M Ω MIN
TEST POTENTIAL : 2000 V EFF


NOTES :
1) CONNECTOR ACCEPTS #12 MACHINED SOCKET CONTACT
2) CONTACTS TO BE ORDERED SEPARATELY
3) ref UTG0122G1S IS COMPATIBLE WITH : UTP6122G1P
4) GROUND CONTACT IS FIRST MATE LAST BREAK (0.5 mm mini)

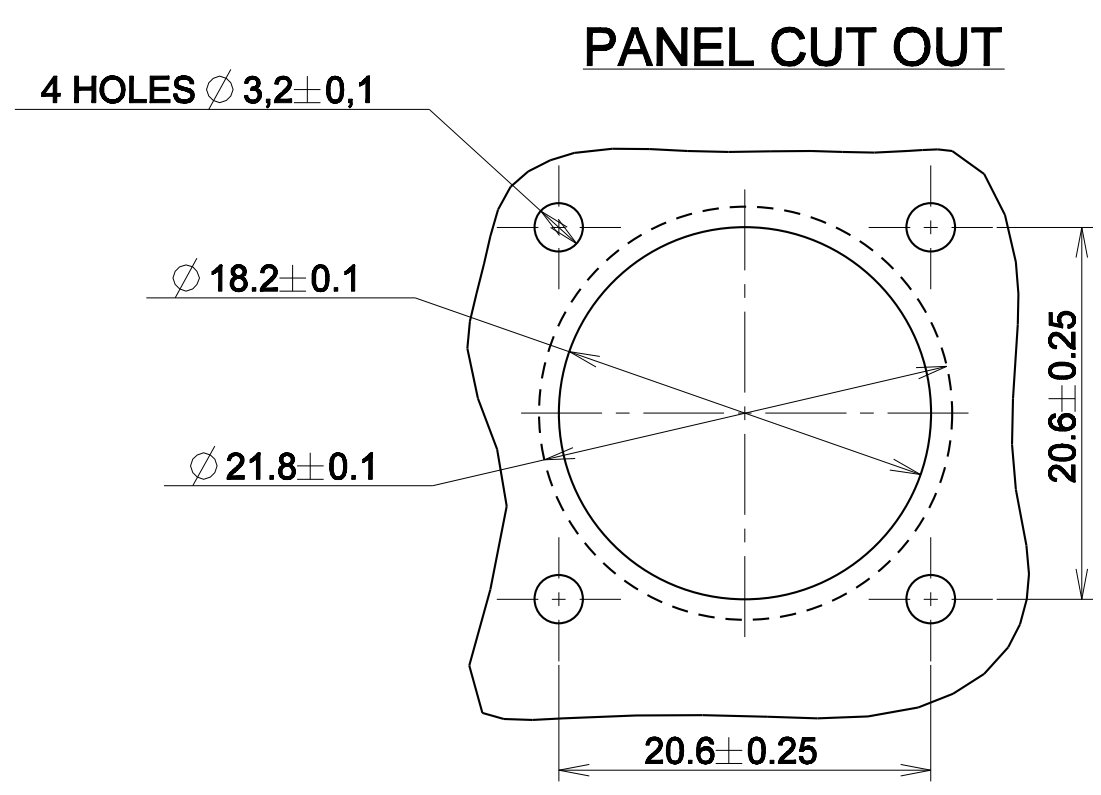

COMMERCIAL OFFER

H TERMINAISON : OPTIONNAL O'RING FOR IP65 SEALING LEVEL

P/N : UTG0122G1S (H)

b	17/12/10	Add part number and change general tolerances		—	
ISS	DATE	Latest modification - by:		RAGAINÉ M.	MOD N°
Designed by:		RAGAINÉ M.	Date: 03/07/08	CUSTOMER DRAWING	
TITLE		FEMALE RECEPTACLE SIZE 12 LAYOUT 3 PTS UTG CONNECTOR			
Scale		General linear Tolerances:	NPRDS / PROJECT		
1/1		± 0,2	IC081903A		
		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission	
FORMAT	SOURIAU DRG N° UTG0122G1S-C				SHEET 1 / 1