
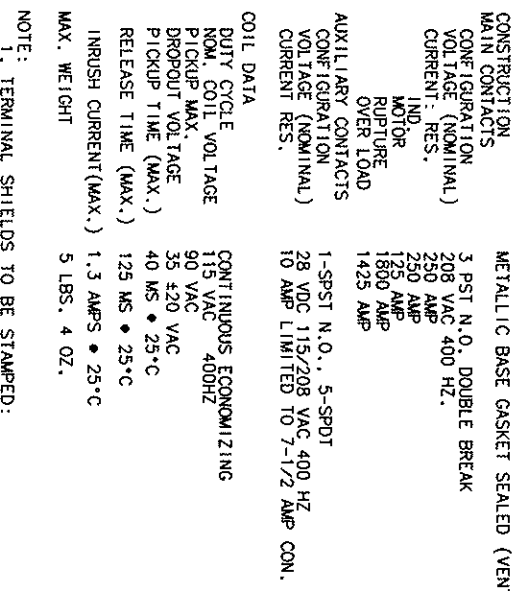


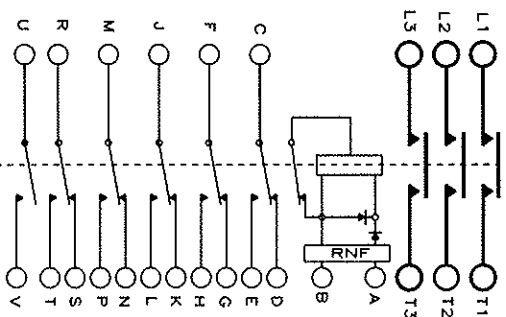

|                      |                                   |
|----------------------|-----------------------------------|
| CONSTRUCTION         | METALLIC BASE GASKET SEALED (VENT |
| MAIN CONTACTS        |                                   |
| CONFIGURATION        | 3 PST N.O., DOUBLE BREAK          |
| VOLTAGE (NOMINAL)    | 208 VAC 400 HZ.                   |
| CURRENT - RES.       |                                   |
| IND                  | 250 AMP                           |
| MOTOR                | 250 AMP                           |
| RUPTURE              | 1250 AMP                          |
| OVER LOAD            | 1600 AMP                          |
| AUXILIARY CONTACTS   | 1425 AMP                          |
| CONFIGURATION        |                                   |
| VOLTAGE (NOMINAL)    | 1-SPST N.O., 5-SPDT               |
| CURRENT RES.         | 28 VDC 115/208 VAC, 400 HZ        |
|                      | 10 AMP LIMITED TO 7-1/2 AMP CON.  |
| COIL DATA            |                                   |
| DUTY CYCLE           | CONTINUOUS ECONOMIZING            |
| NOM. COIL VOLTAGE    | 115 VAC                           |
| PICKUP MAX.          | 90 VAC                            |
| DROPOUT VOLTAGE      | 35 $\pm$ 20 VAC                   |
| PICKUP TIME (MAX.)   | 40 MS $\bullet$ 25°C              |
| RELEASE TIME (MAX.)  | 125 MS $\bullet$ 25°C             |
| INRUSH CURRENT(MAX.) | 1.3 AMPS $\bullet$ 25°C           |
| MAX. WEIGHT          | 5 LBS., 4 OZ.                     |

NOTE:

1. TERMINAL SHIELDS TO BE STAMPED:

|                      |                                   |
|----------------------|-----------------------------------|
| CONSTRUCTION         | METALLIC BASE GASKET SEALED (VENT |
| MAIN CONTACTS        |                                   |
| CONFIGURATION        | 3 PST N.O., DOUBLE BREAK          |
| VOLTAGE (NOMINAL)    | 208 VAC 400 HZ.                   |
| CURRENT - RES.       |                                   |
| IND                  | 250 AMP                           |
| MOTOR                | 250 AMP                           |
| RUPTURE              | 1250 AMP                          |
| OVER LOAD            | 1600 AMP                          |
| AUXILIARY CONTACTS   | 1425 AMP                          |
| CONFIGURATION        |                                   |
| VOLTAGE (NOMINAL)    | 1-SPST N.O., 5-SPDT               |
| CURRENT RES.         | 28 VDC 115/208 VAC, 400 HZ        |
|                      | 10 AMP LIMITED TO 7-1/2 AMP CON.  |
| COIL DATA            |                                   |
| DUTY CYCLE           | CONTINUOUS ECONOMIZING            |
| NOM. COIL VOLTAGE    | 115 VAC                           |
| PICKUP MAX.          | 90 VAC                            |
| DROPOUT VOLTAGE      | 35 $\pm$ 20 VAC                   |
| PICKUP TIME (MAX.)   | 40 MS $\bullet$ 25°C              |
| RELEASE TIME (MAX.)  | 125 MS $\bullet$ 25°C             |
| INRUSH CURRENT(MAX.) | 1.3 AMPS $\bullet$ 25°C           |
| MAX. WEIGHT          | 5 LBS., 4 OZ.                     |

NOTE:

1. TERMINAL SHIELDS TO BE STAMPED: