



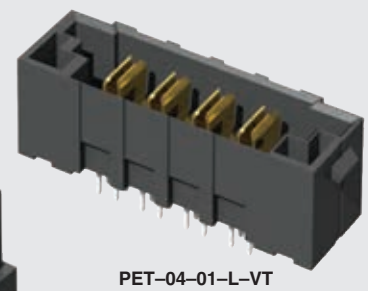

**POWER STRIP 40**

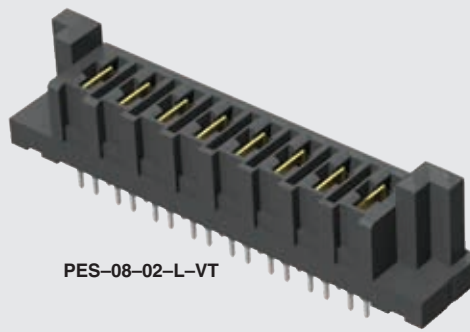

**PES, PET SERIES**

**(6.35 mm) .250"**

# 40 A HIGH POWER HEADER & SOCKET

**PES Mates with:**

**PET**

**PET Mates with:**

**PES, PESS**

## SPECIFICATIONS

For complete specifications see [www.samtec.com?PET](http://www.samtec.com?PET) or [www.samtec.com?PES](http://www.samtec.com?PES)

**Insulator Material:**

Black LCP

**Terminal Material:**

Copper Alloy

**Plating:**

Sn or Au over 50 μm (1.27 μm) Ni

**Operating Temp Range:**

-55 °C to +105 °C with Tin

-55 °C to +125 °C with Gold

**Voltage Rating:**

725 VAC/1025 VDC

**Wiping Distance:**

(4.14 mm) .163" Max

**Standard Creepage:**

(3.66 mm) .144"

**Standard Clearance:**

(3.31 mm) .130"

**RoHS Compliant:**

Yes

**Lead-Free Solderable:**

Yes

PET/PES	
PINS	CURRENT RATING (PER CONTACT)
1	58.7 A
2	48.5 A
3	41.1 A
4	38.0 A
8	29.4 A

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



## ALSO AVAILABLE (MOQ Required)

- Locking Clip (Manual placement required)
- No Latch ears
- Other platings

## OTHER SOLUTIONS

- Combination Signal/Power. See PES or PETC Series.

**Note:** Some sizes, styles and options are non-standard, non-returnable.

**PES**

**NO. PINS PER ROW**

**-02, -04, -06, -08**

LEAD STYLE	A
-01	(2.35) .093
-02	(3.95) .156

**LEAD STYLE**

**-01**  
= Use with (1.60 mm) .062" Thick PCB

**-02**  
= Use with (3.18 mm) .125" Thick PCB

**PLATING OPTION**

**-L**  
= 10 μm (0.25 μm) Gold on contact, Matte Tin on tail

**-T**  
= Matte Tin

**TAIL OPTION**

**-VT**  
= Vertical

**-RA**  
= Right-angle (Screw Down option required)

**OTHER OPTION**

**-SD**  
= Screw Down (Right-angle only)

**RUGGEDIZED BY SAMTEC**

• Screw down (right-angle)

**CREEPAGE AND CLEARANCE**

Selectively loading contacts achieves customer specific creepage and clearance requirements.  
Contact [asp@samtec.com](mailto:asp@samtec.com)

**PET**

**NO. PINS PER ROW**

**-02, -04, -06, -08**

LEAD STYLE	A
-01	(2.35) .093
-02	(3.95) .156

**LEAD STYLE**

**-01**  
= Use with (1.60 mm) .062" Thick PCB

**-02**  
= Use with (3.18 mm) .125" Thick PCB

**PLATING OPTION**

**-L**  
= 10 μm (0.25 μm) Gold on contact, Matte Tin on tail

**-T**  
= Matte Tin

**TAIL OPTION**

**-VT**  
= Vertical

**-RA**  
= Right-angle (Screw Down option required)

**OTHER OPTION**

**-SD**  
= Screw Down (Right-angle only)

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.