
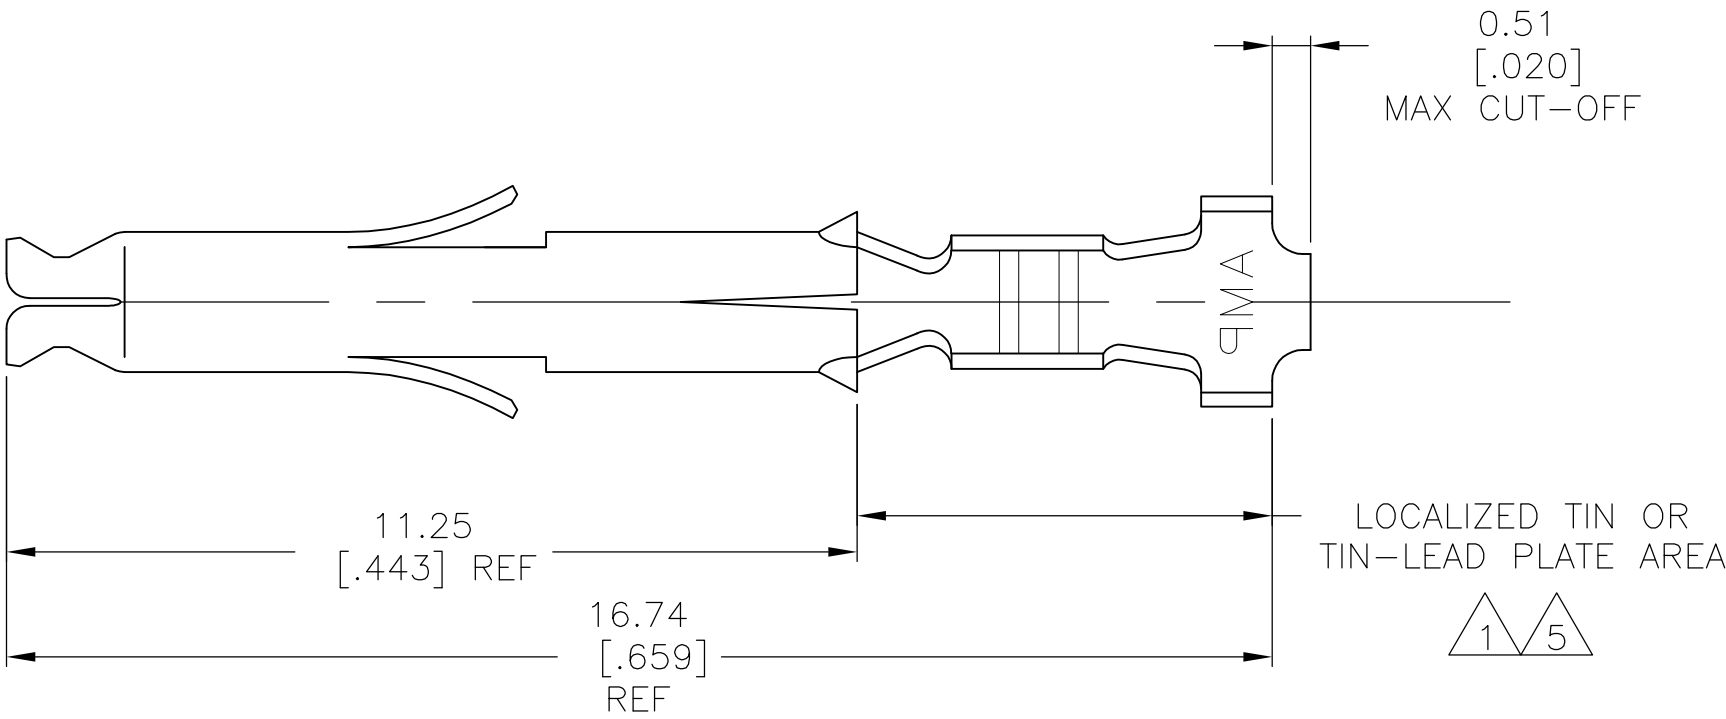


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00						
			P1	REVISED PER ECO-11-004587	11MAR11	RK	HMR

D

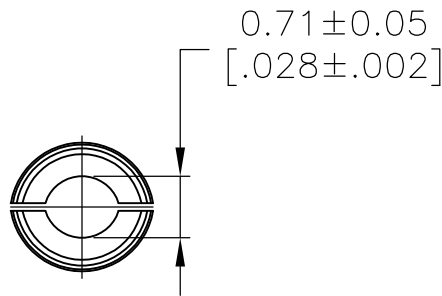

- 1

0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.
- 2

WIRE RANGE: 0.12 – 0.4mm² (26–22 AWG).
- 3



INSULATION RANGE: 1.20–1.75[.047–.069] DIA.
- 4

DIMENSIONS IN BRACKETS ARE IN INCHES.

- 5


0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.

C

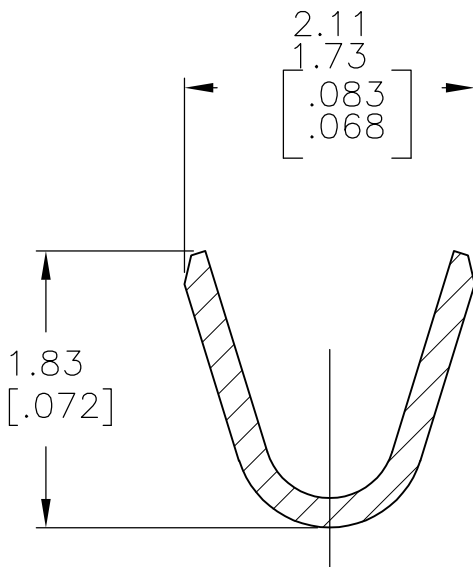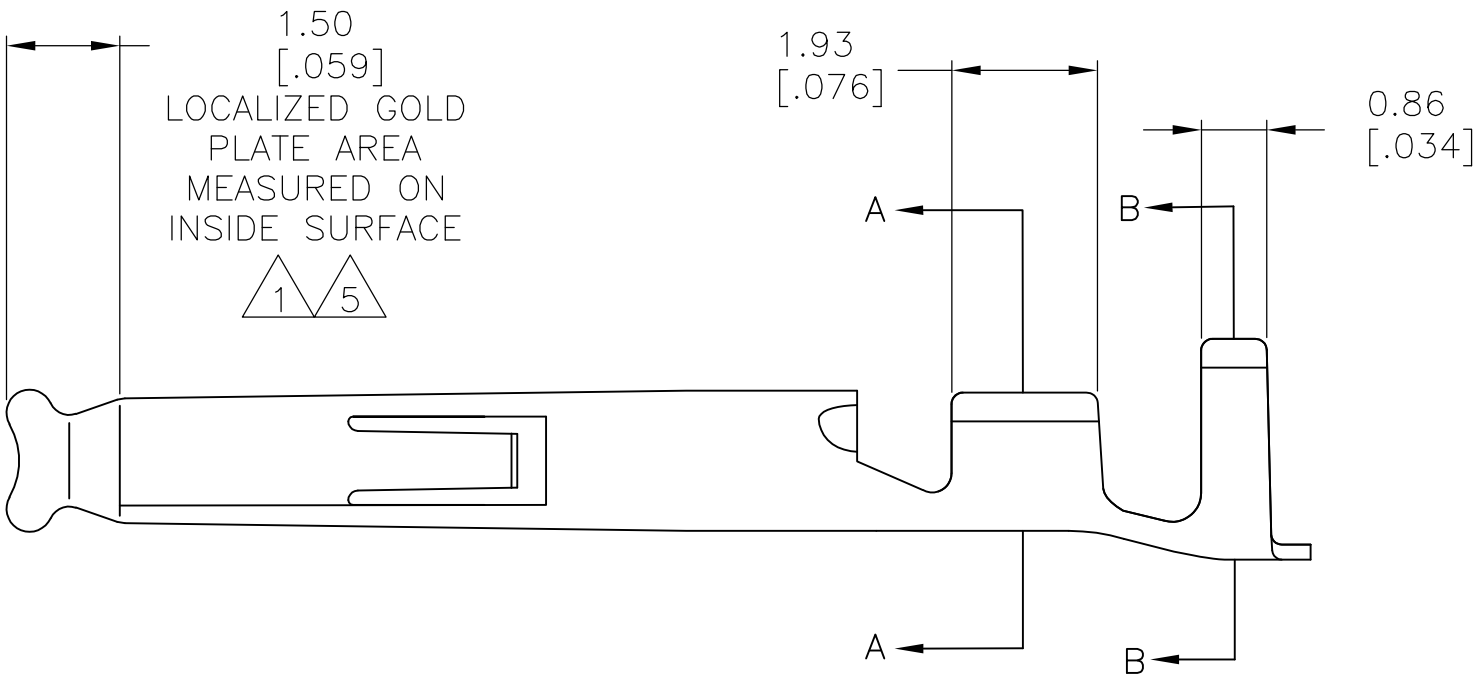



SECTION A–A
SCALE 20:1

B

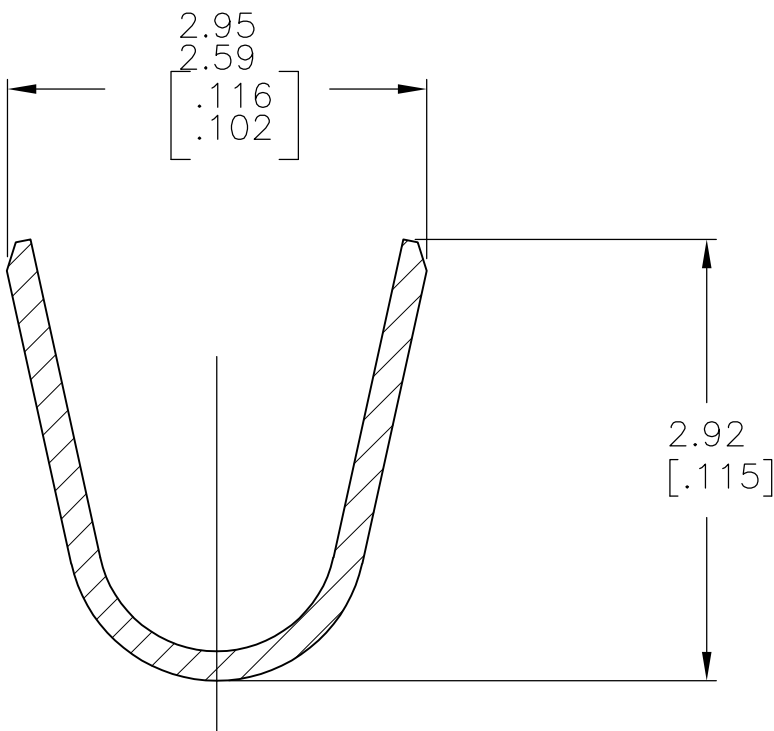

SECTION B–B
SCALE 20:1

5	0.20 [.008] PH BRZ	1–770902–1
5	0.20 [.008] BRASS	1–770902–0
1	0.20 [.008] PH BRZ	770902–6
PRE–TIN	0.20 [.008] PH BRZ	770902–4
1	0.20 [.008] BRASS	770902–3
PRE–TIN	0.20 [.008] BRASS	770902–1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER		16OCT02		 TE Connectivity					
DIMENSIONS: mm [INCHES]		CHK C. JONES		16OCT02							
		APVD C. JONES		16OCT02		NAME SOCKET, MINI UNIVERSAL MATE-N-LOK(TM)					
		PRODUCT SPEC —									
		APPLICATION SPEC —		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		WEIGHT —		A2		00779		C=770902		—	
MATERIAL —		FINISH —		CUSTOMER DRAWING		SCALE 10:1		SHEET 1 of 1		REV P1	