



CIRCUIT: SPST

RECOMMEND P.C.B. LAYOUT

CONTACT CONFIGURATION

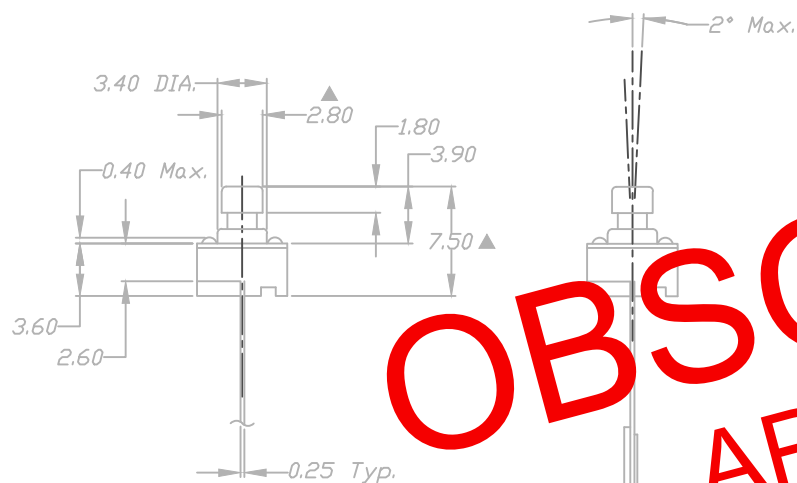

OBSOLETE
 APRIL 2020
 PCR 24257

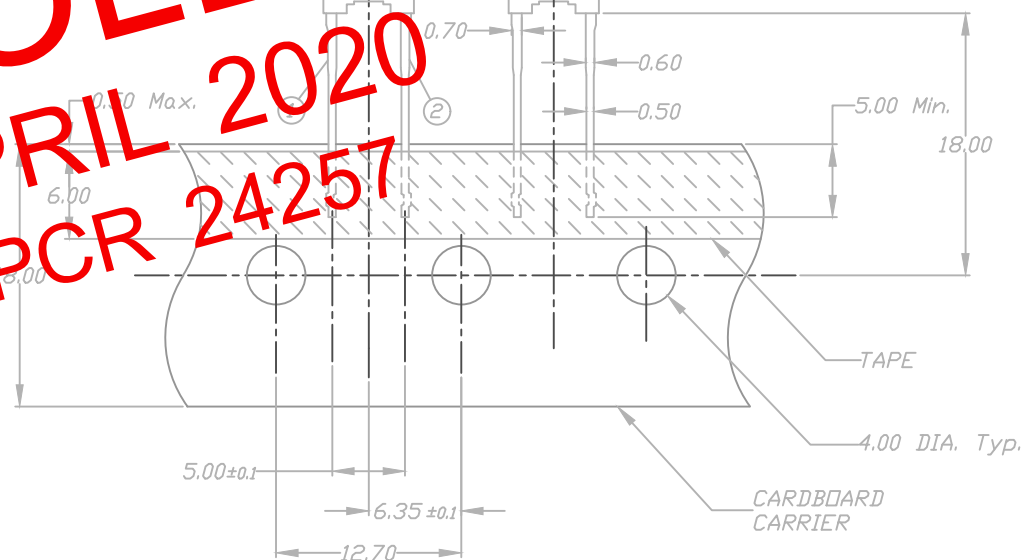

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. CONTACT RATING: 50mA @12V DC
- ▲ 4. CONTACT MATERIAL: SILVER
- ▲ 5. OPERATING FORCE: 160±50gf
6. TRAVEL: 0.25 +0.2/-0.1
7. CONTACT RESISTANCE: 100MILLI OHMS max.
8. ELECTRICAL LIFE: 100,000 CYCLES
9. PACKAGING:
CARRIER IS FOLDED EVERY 25 PITCHES
(24) SWITCHES PER FOLD
(1,000) SWITCHES PER BOX
10. 2002/95/EC (ROHS) COMPLIANT
11. ▲ DENOTES MAJOR DIMENSION.

TOLERANCES		E-SWITCH®			
		TITLE			
±0.4	±0.25	TL59SPF160Q			
0.0	0.00	SCALE	DATE	DR	DWG
		2:1	1/5/2007	TN	P010585
				REV	B

B	16833	DIM .30 TO .25, UPDATED NOTES	1/5/07	TN
A	--	RELEASED FOR PRODUCTION		
REV.	PCR	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
 IS PROPRIETARY TO E-SWITCH AND IS
 NOT TO BE COPIED OR TRANSFERRED