


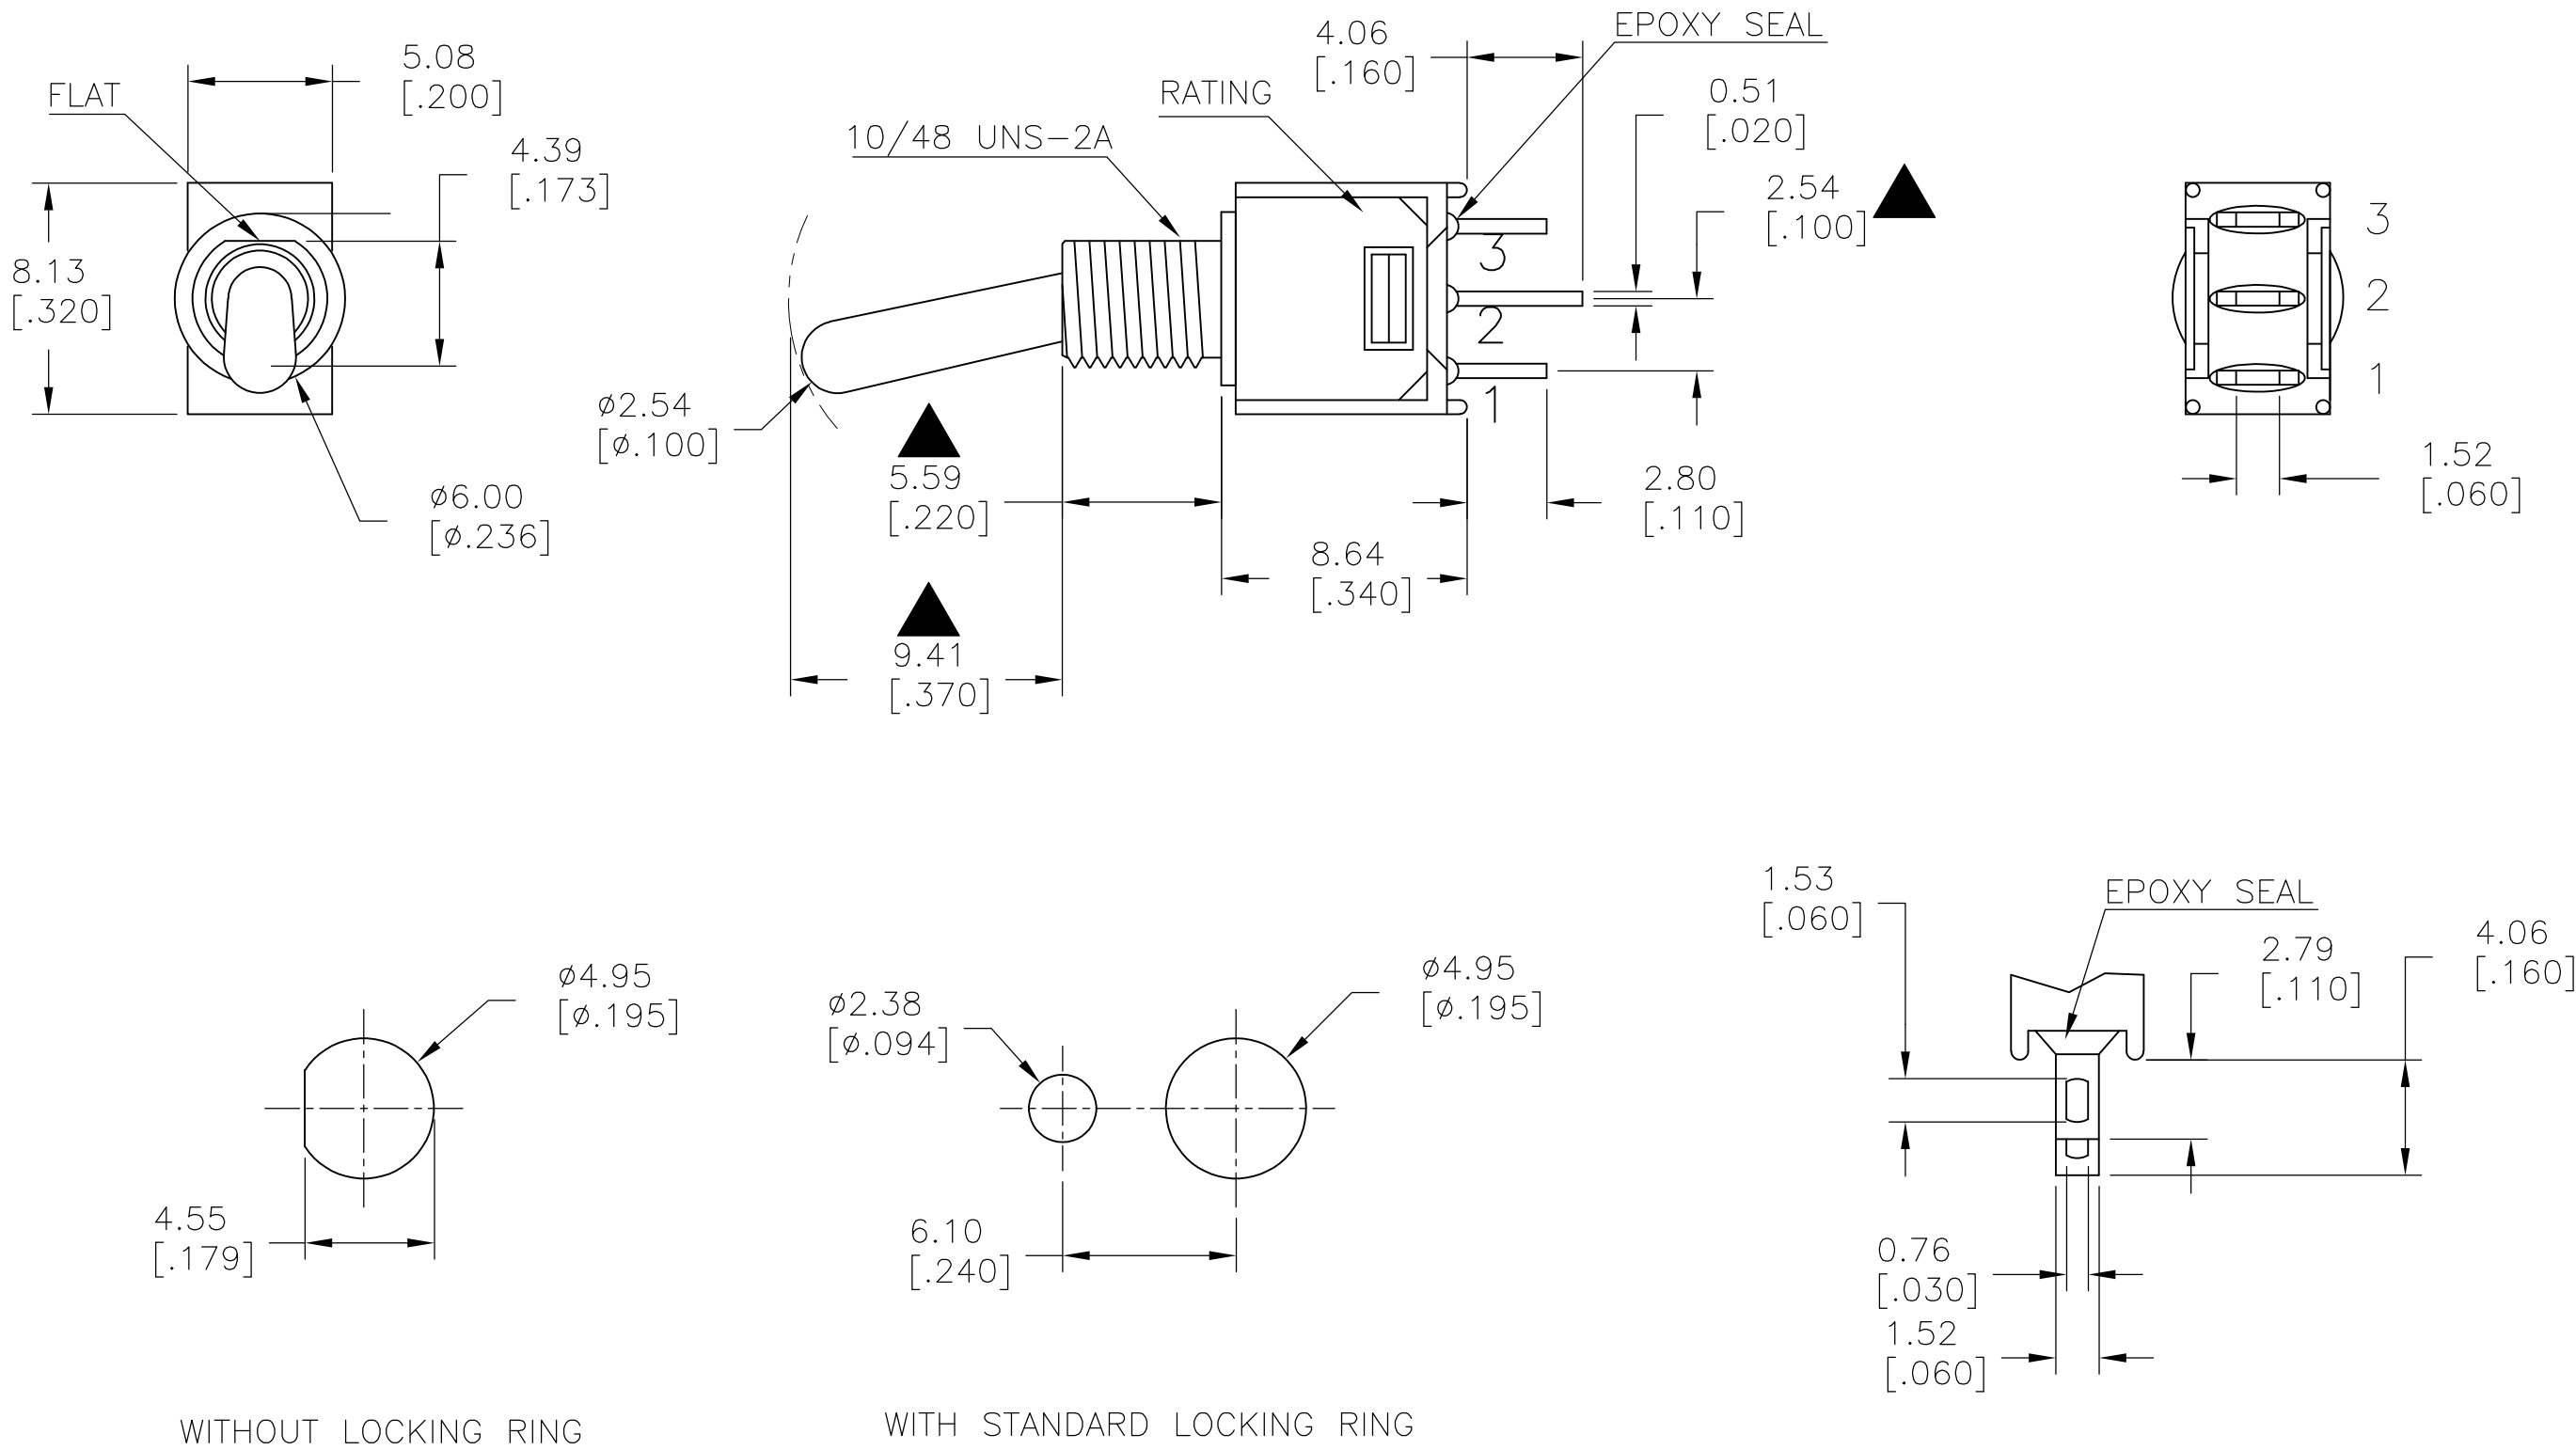

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION


PANEL MOUNTING



SOLDER LUG

LAYOUT FOR PN 2267080-2

SPECIFICATIONS


- MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20 m Ω MAX. INITIAL @ 2-4VDC 100mA FOR BOTH SILVER AND GOLD PLATED CONTACTS.
- CONTACT RATING: SILVER PLATED: 3A @ 120 VAC OR 28 VDC, 1A @ 250 VAC
- INSULATION RESISTANCE: 1,000M Ω MIN.
- DIELECTRIC STRENGTH: 1,000 Vrms MIN.@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

SILVER	ON-ON	SOLDER LUG	VERTICAL	1	2	TMS1T1B1M1QE	2267080-2			
SILVER	OFF-ON	SOLDER LUG	VERTICAL	1	2	TMS6T1B1M1QE	2267080-1			
CONTACT MATERIAL	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN			
		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 10JUL2014 NAGALAKSHMI K		 TE Connectivity				
		CHK 10JUL2014 HILL, RYAN		NAME						
		DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 10JUL2014 HILL, RYAN		SUBMINIATURE TOGGLE SWITCH		
				0 PLC ± -		PRODUCT SPEC				
				1 PLC ± 0.38[.015]		APPLICATION SPEC				
MATERIAL		FINISH		WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
-		-		-		A2		00779	G=2267080	-
CUSTOMER DRAWING						SCALE 3:1		SHEET 1 OF 2		REV A

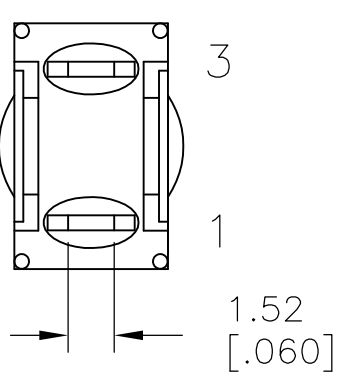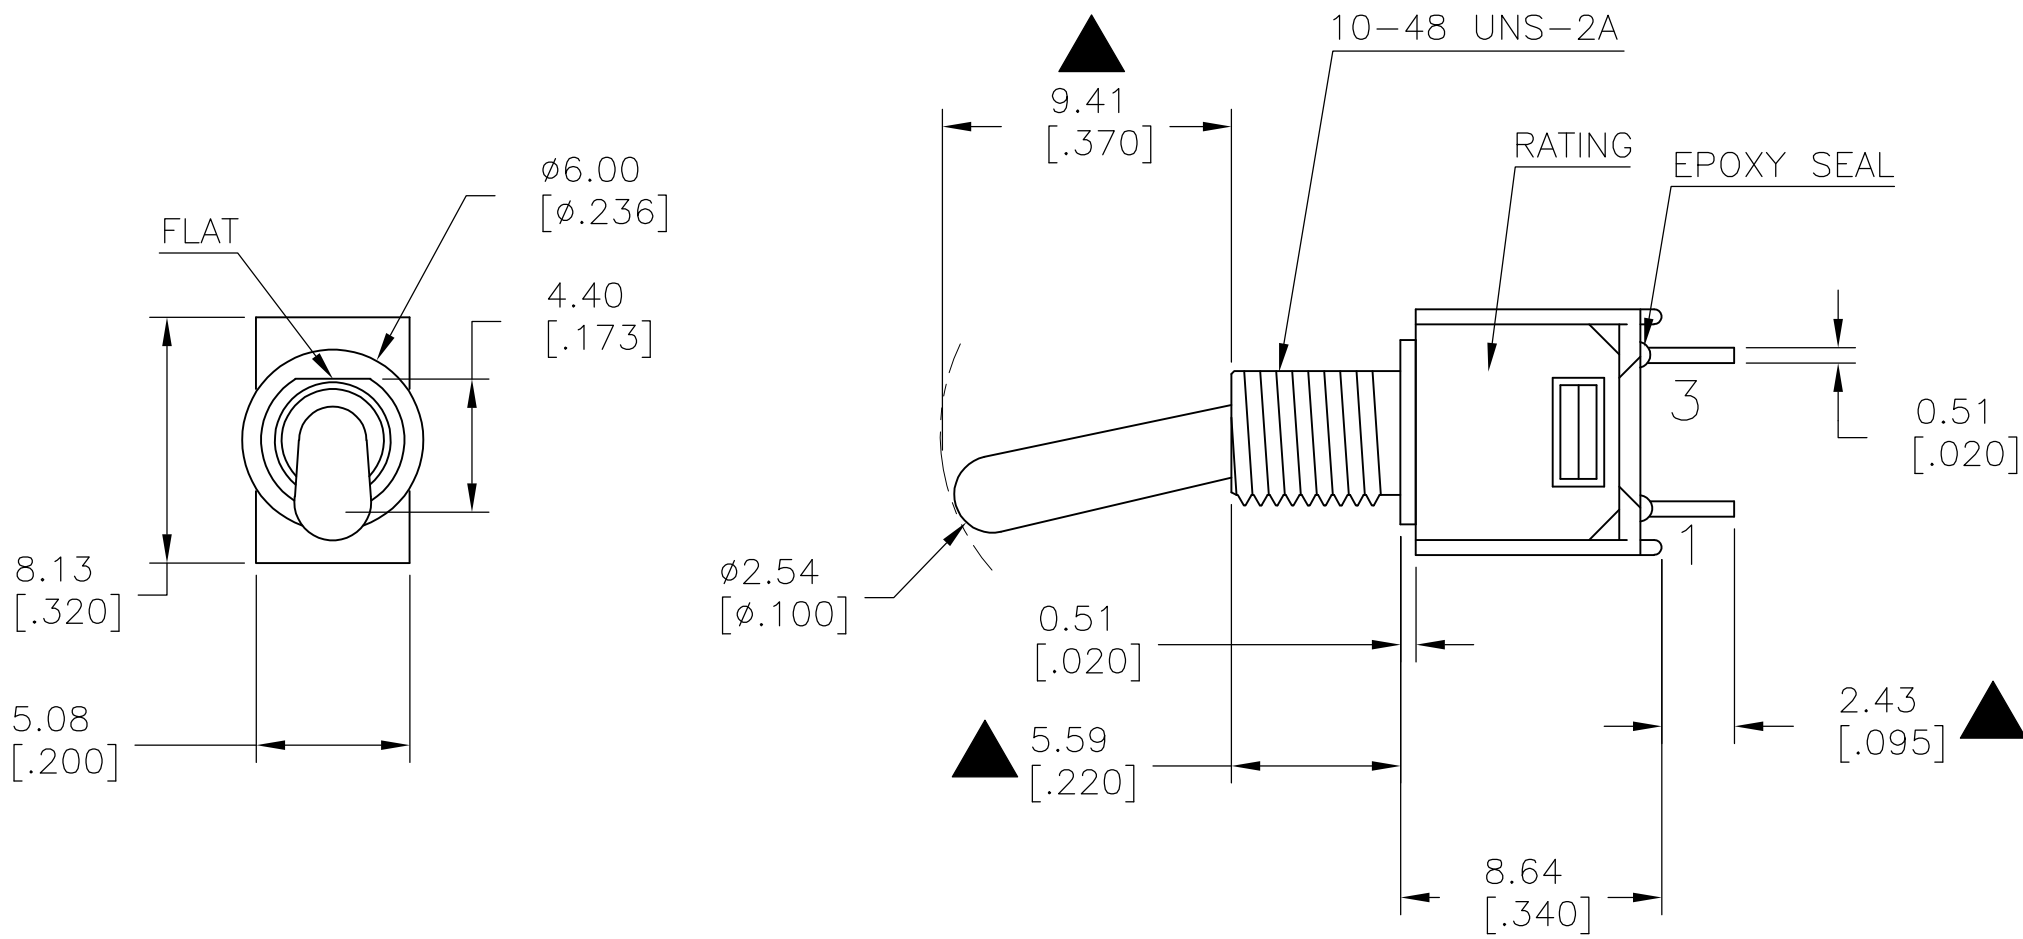


MODEL NO.	POS.1	POS.2	POS.3
TMS	OFF	NONE	ON
TERM. COMM.	OPEN	N/A	3-1
SCHEMATIC			

SWITCH FUNCTION

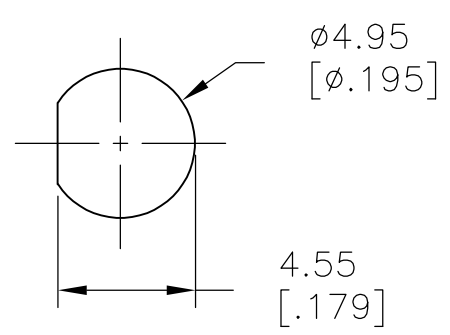

PANEL MOUNTING

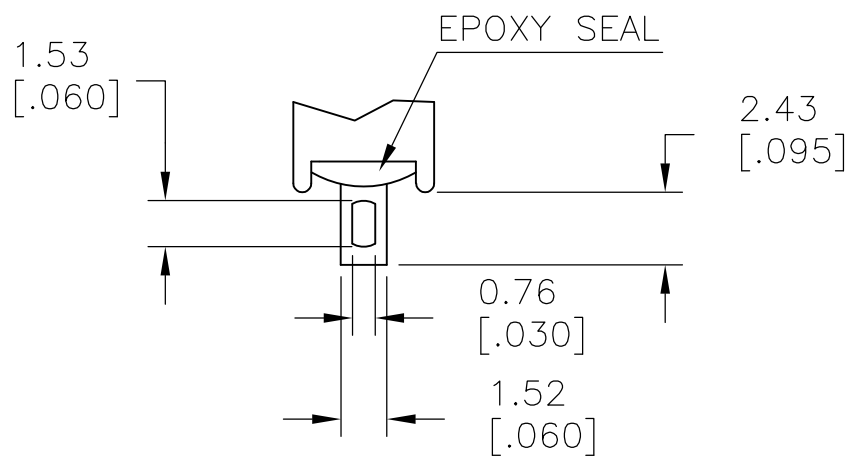

SOLDER LUG

LAYOUT FOR PN 2267080-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
NAGALAKSHMI K
10JUL2014

CHK
HILL, RYAN
10JUL2014

APVD
HILL, RYAN
10JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
mm [INCHES]

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.38[.015]

2 PLC ± 0.25[.010]

3 PLC ± -

4 PLC ± -

ANGLES ± 5°

FINISH

NAME

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2267080

RESTRICTED TO

TE Connectivity

SUBMINIATURE TOGGLE SWITCH

SCALE
3:1

SHEET
2 OF 2

REV
A