


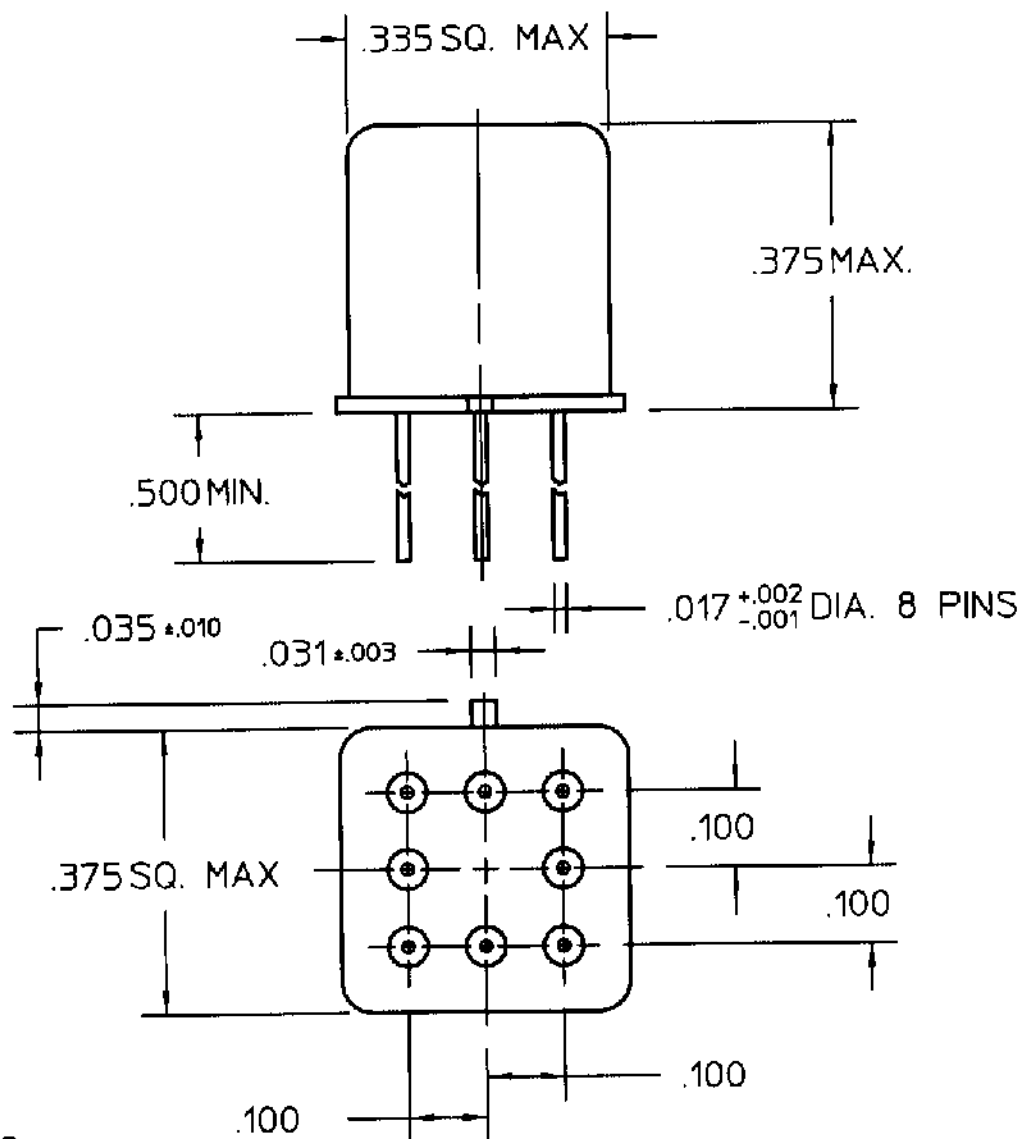

REV. 0

DCO 141053


COIL: @ 25°C
 RESISTANCE 800 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 7.0 VDC
 MUST RELEASE 4.0 VDC MAX, 0.64 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
 RELEASE TIME 7.5 MS MAX
 CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
 28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. B.D. 5/10/99

CK JERRY C 5/10/99



COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/42-035P

TYPE JMGSD RELAY

JMGSCD-12P