

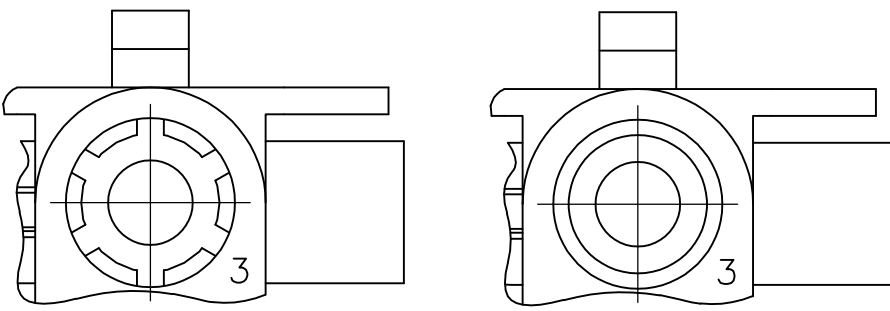
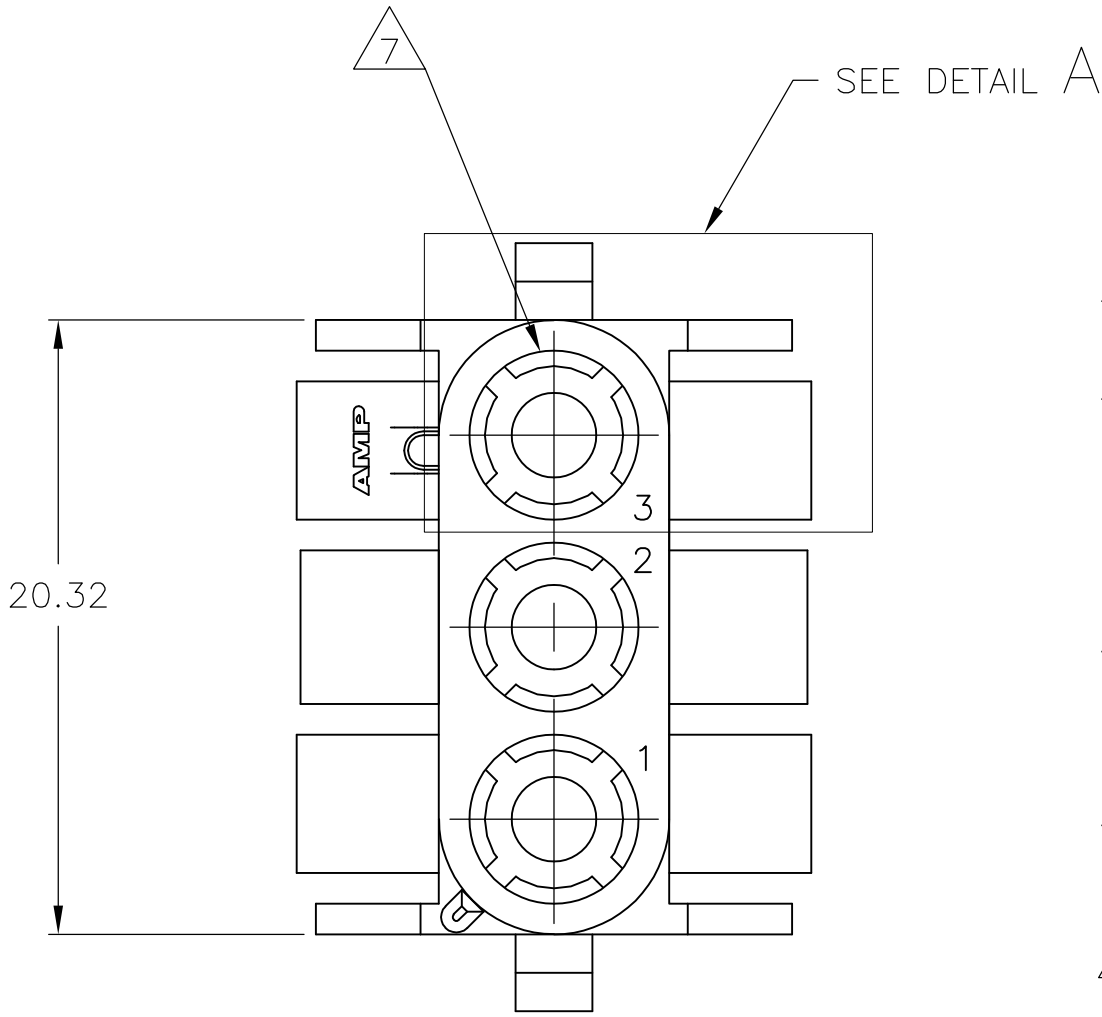
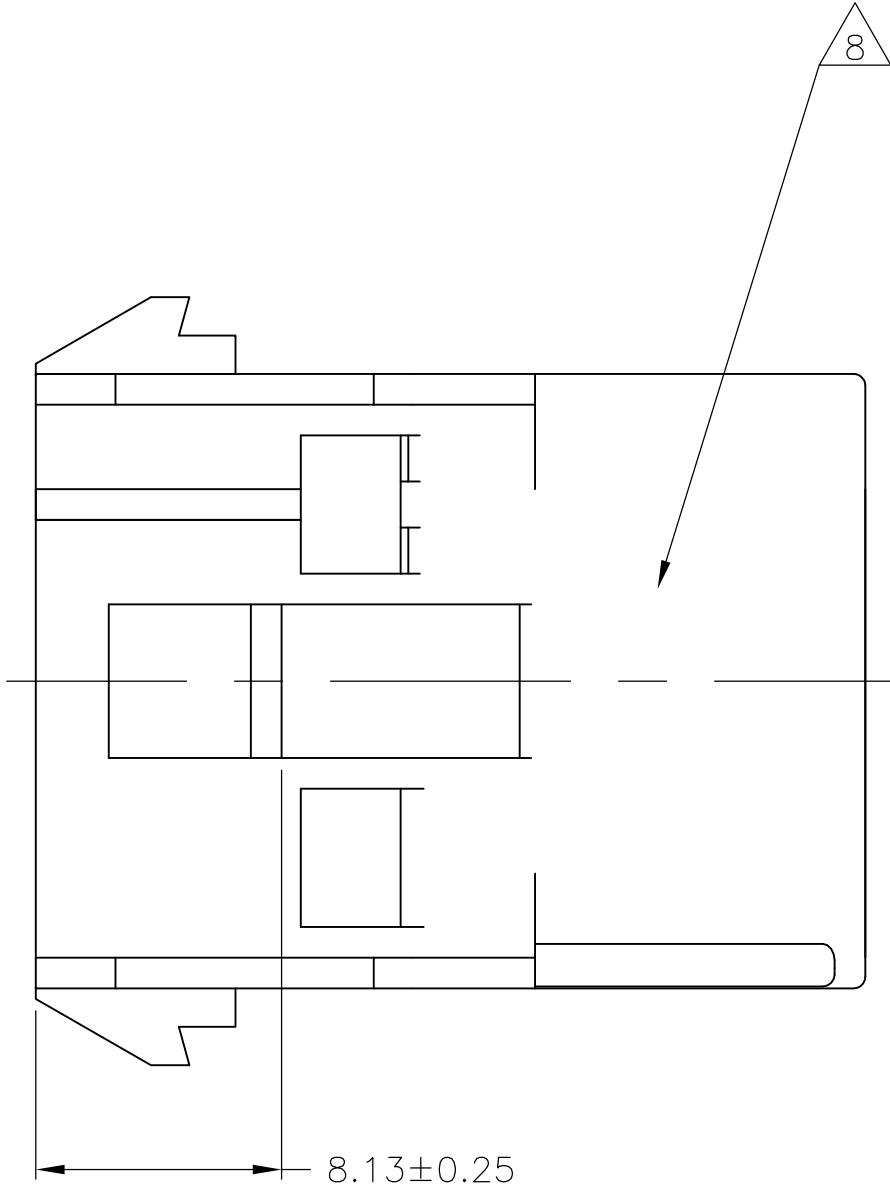
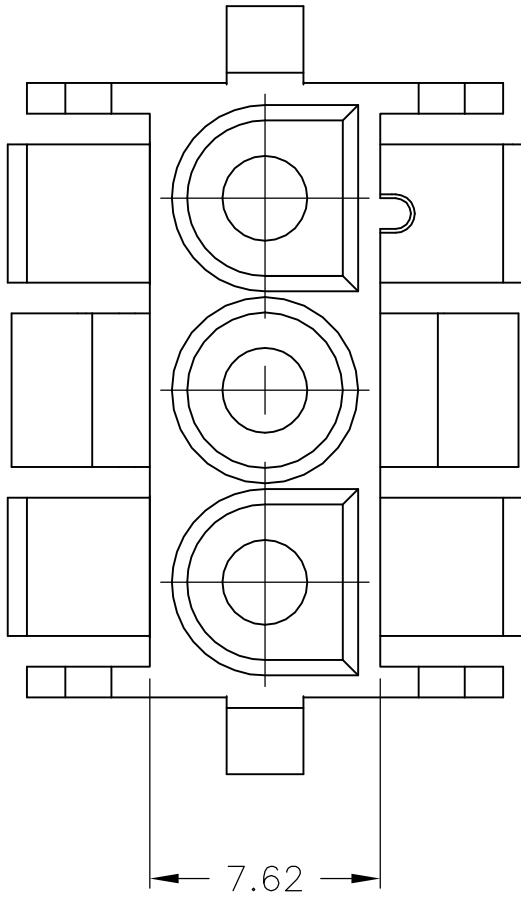


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	00		AN4	REVISED PER ECR-17-008392	26JUN2017	BW KR


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

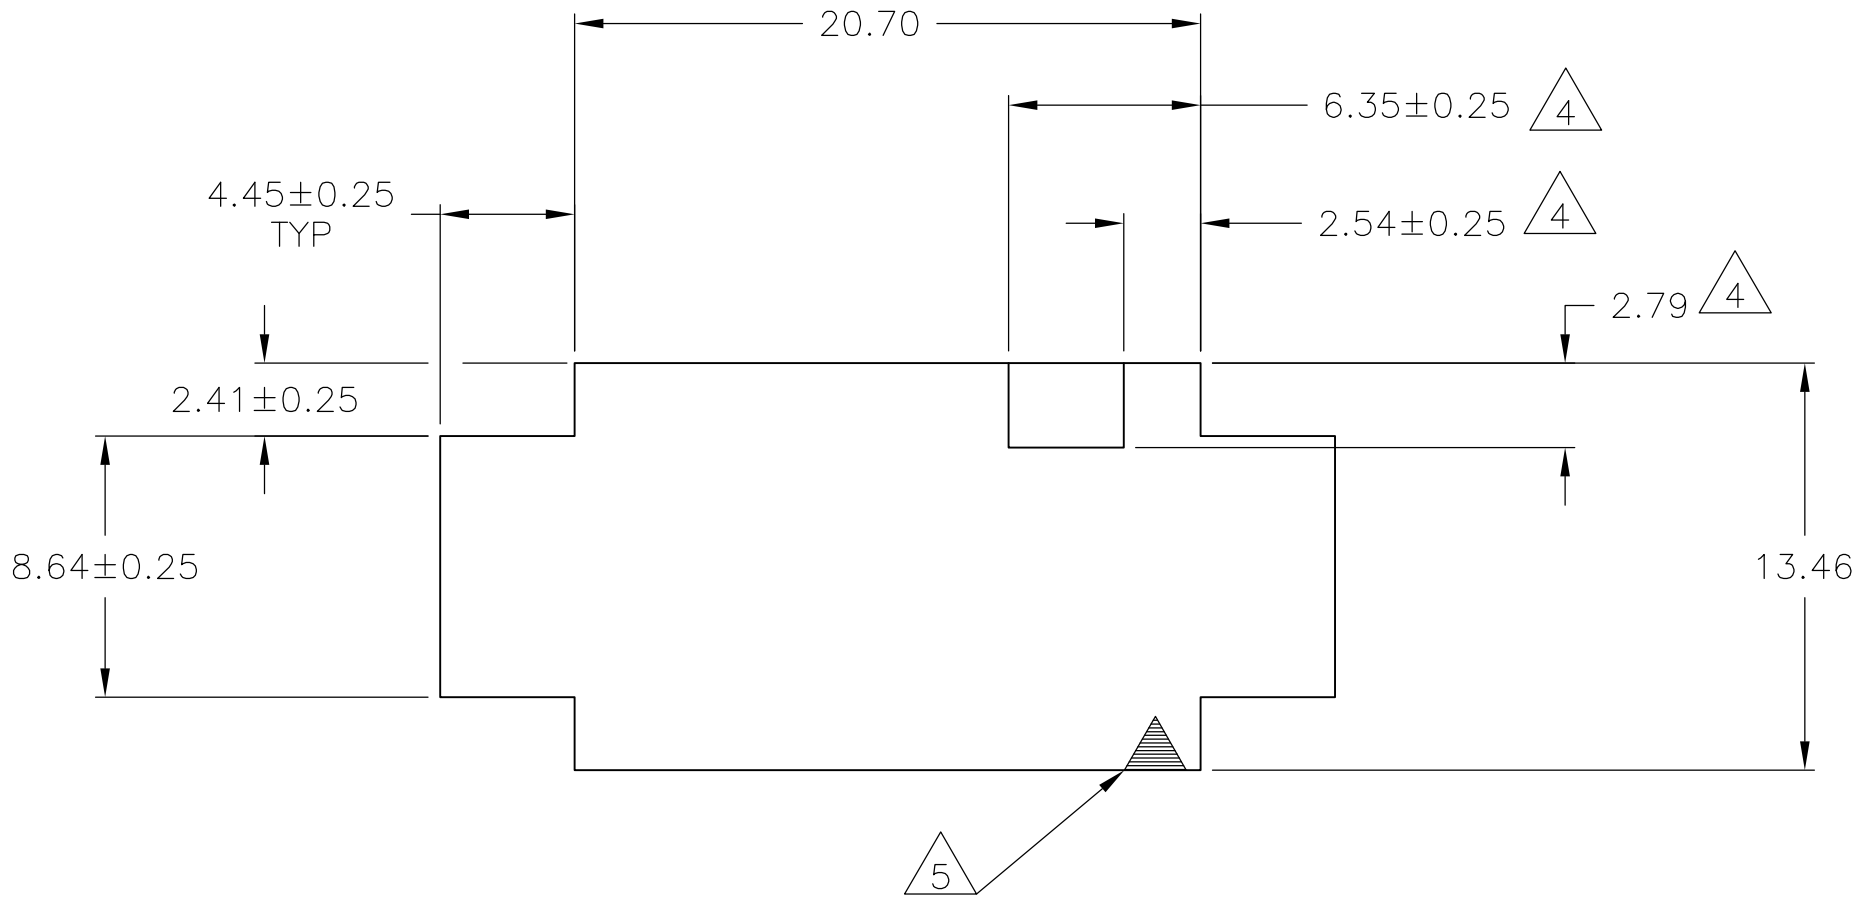

DETAIL A
OPTIONAL CONSTRUCTIONS

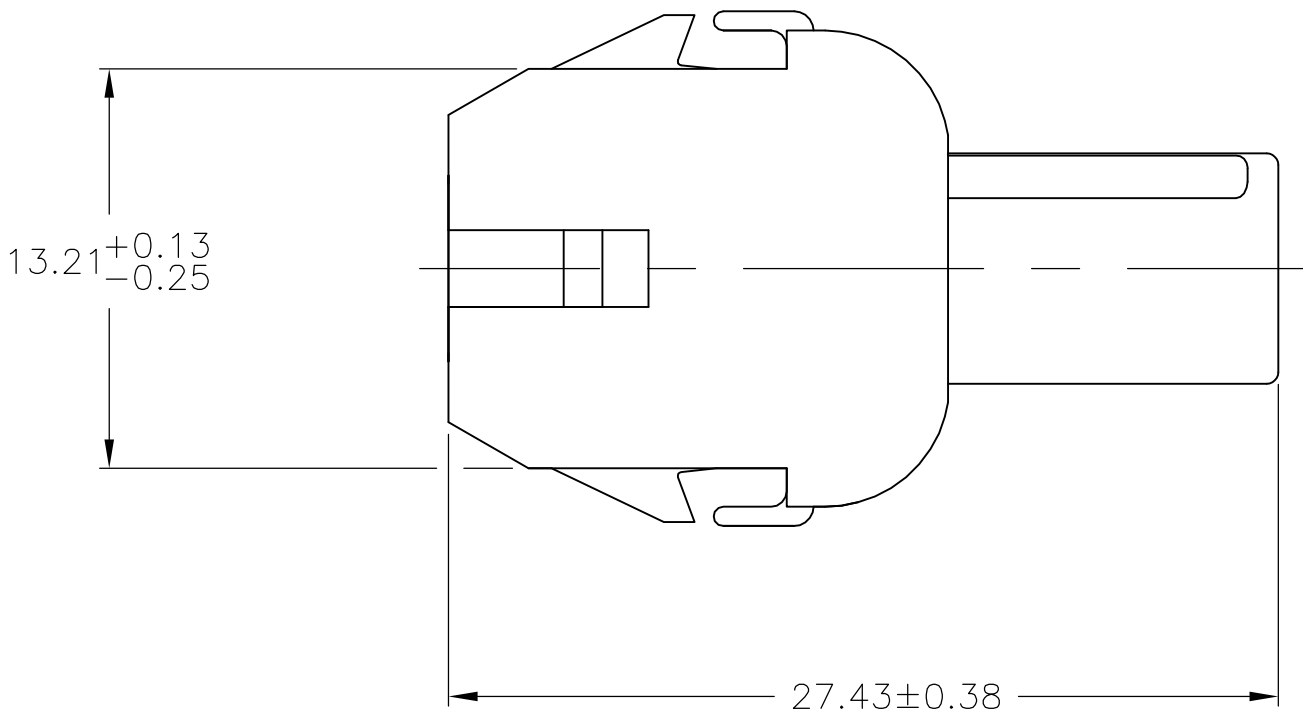

RECOMMENDED PANEL CUT OUT

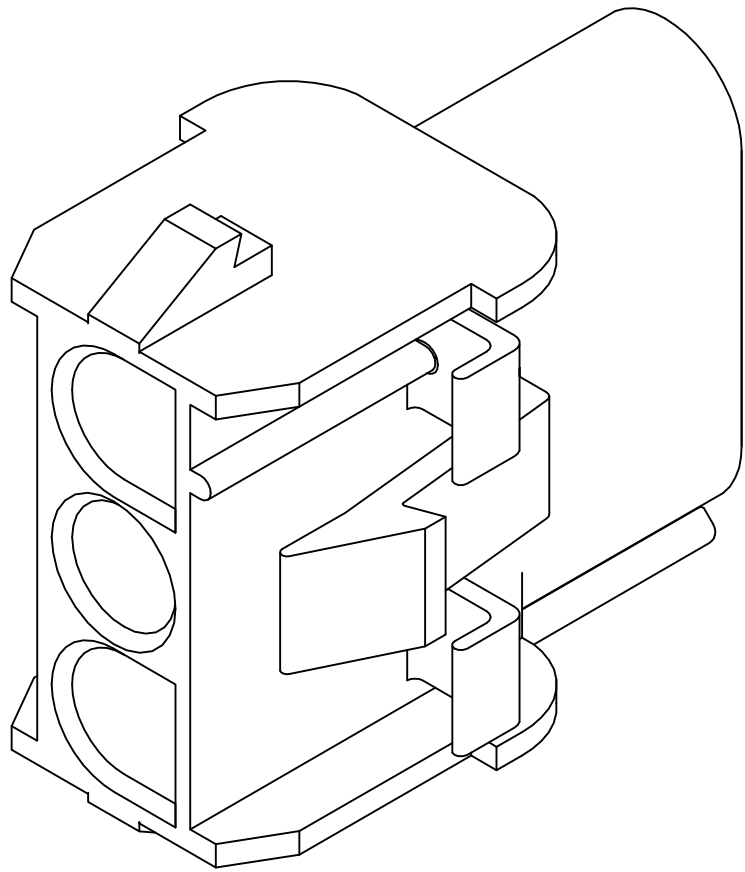

3-DIMENSIONAL MODEL
NTS


4.45	.175	27.43	1.080
2.79	.110	20.70	.815
2.54	.100	20.32	.800
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN
CONVERSION TABLE			

BLACK	1-480701-9
GRAY	1-480701-8
BLUE	1-480701-6
GREEN	1-480701-5
YELLOW	1-480701-4
ORANGE	1-480701-3
RED	1-480701-2
BROWN	1-480701-1
NATURAL	1-480701-0
COLOR	PART NO.





9. OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 28JUL2004	 TE Connectivity	
		CHK S. RIDGILL 28JUL2004		
DIMENSIONS: mm		APVD S. RIDGILL 28JUL2004	NAME	CAP, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	CAGE CODE
0. PLC ± -		APPLICATION SPEC	DRAWING NO	RESTRICTED TO
1. PLC ± -		WEIGHT	A1 00779	C=480701
2. PLC ± 0.13			CUSTOMER DRAWING	SCALE 4:1
3. PLC ± -				SHEET 1 OF 2
4. PLC ± -				REV AN4
ANGLES ± 0°30'				
FINISH -				
MATERIAL NYLON, UL94V-2				

LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	DWN
CM	00	-	-	SEE SHEET 1	-	-

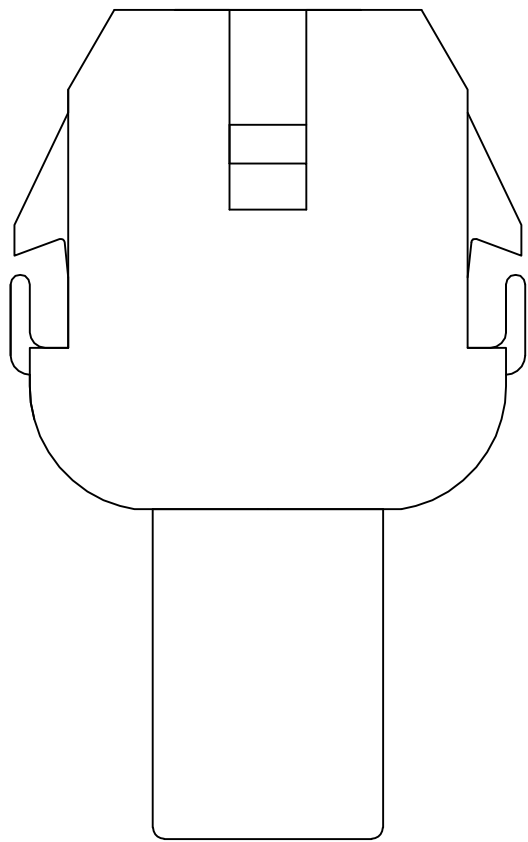

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET, BLACK, BROWN AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

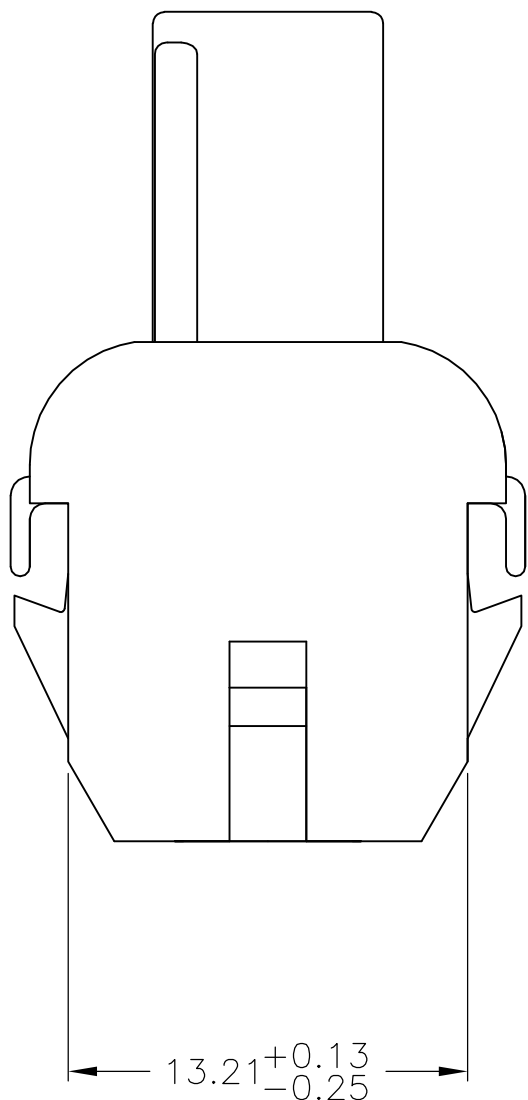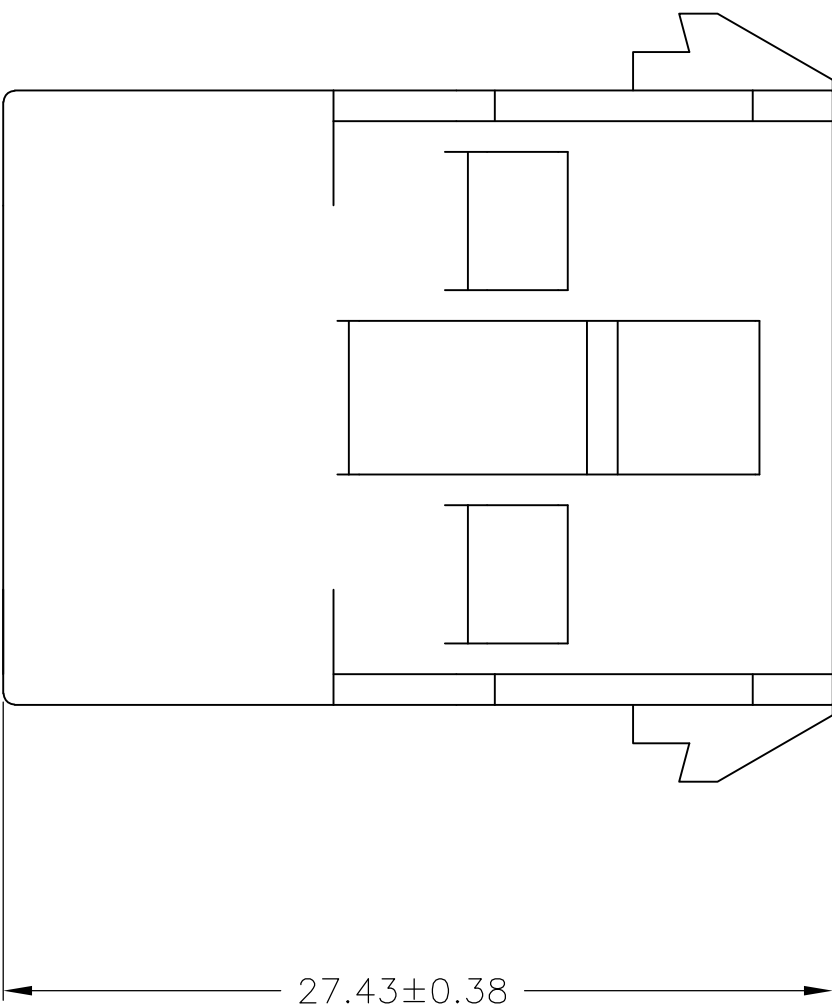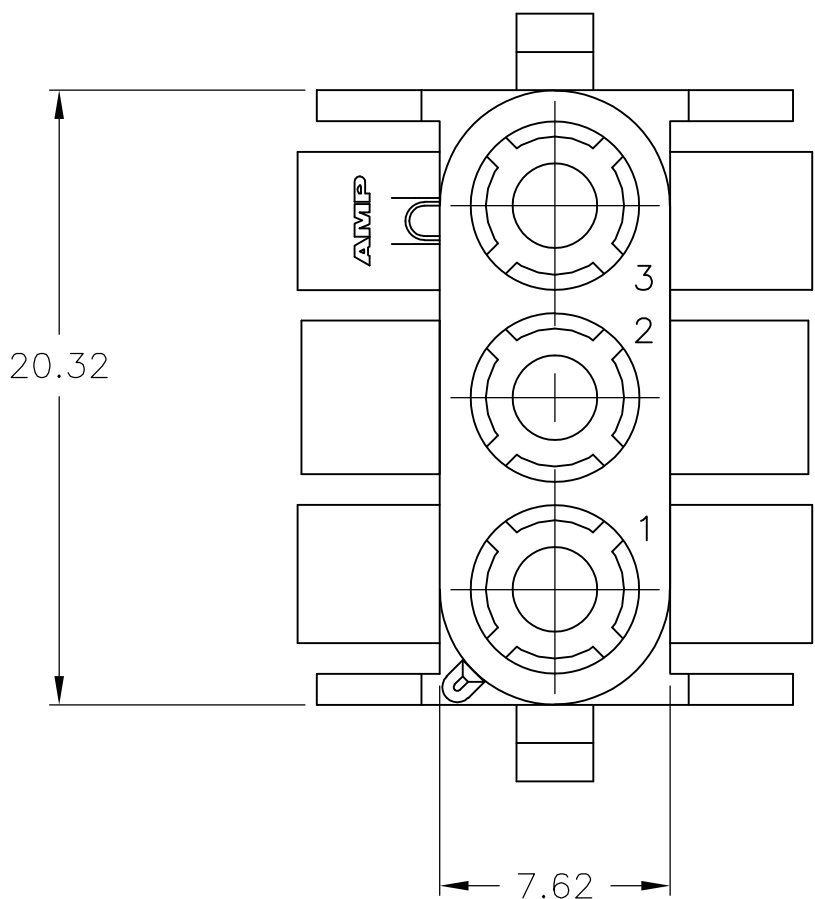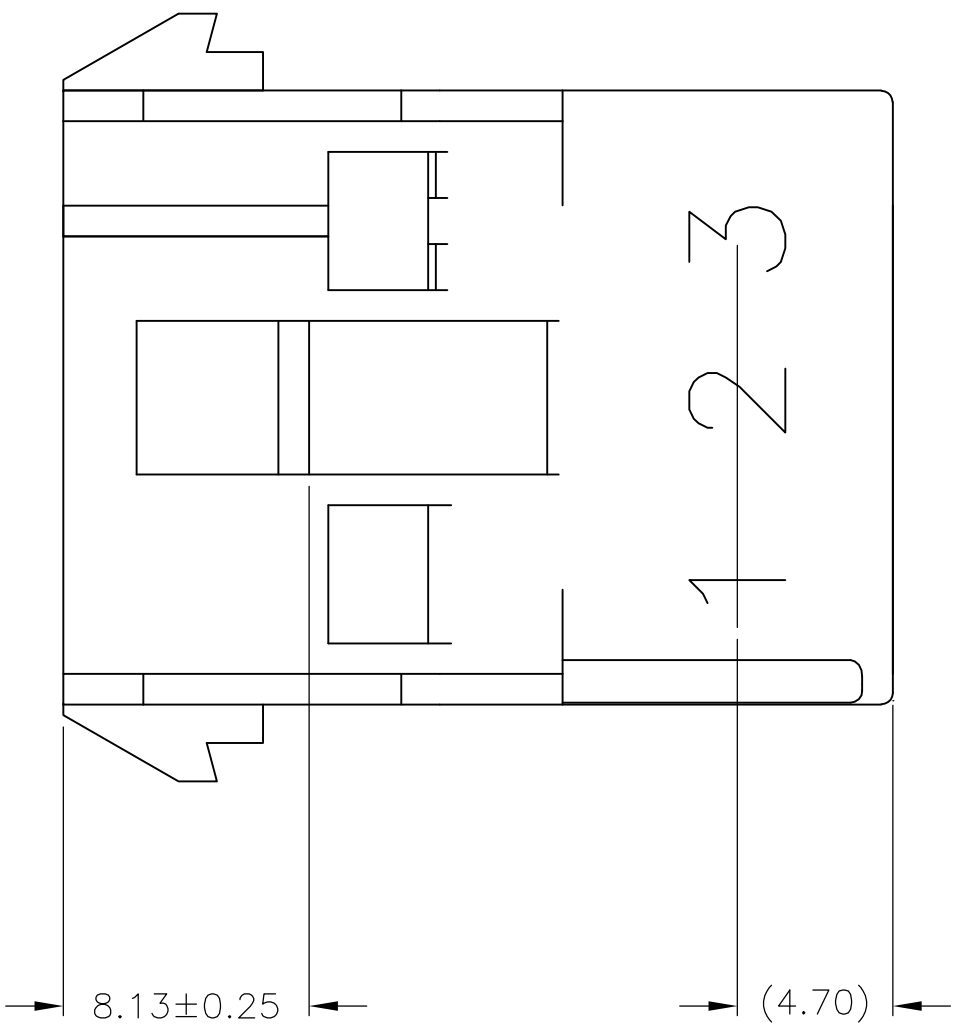

5.59	.220	-	-
4.70	.185	27.43	1.080
3.18	.125	20.32	.800
0.38	.015	13.21	.520
0.25	.010	8.13	.320
0.13	.005	7.62	.300
MM	IN	MM	IN

CONVERSION TABLE

NATURAL

COLOR

2-480701-0

PART NO

TE Connectivity

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
K. WHITAKER
CHK
S. RIDGILL
APVD
S. RIDGILL

28JUL2004
28JUL2004
28JUL2004

DIMENSIONS:

mm

0. PLC ± -
1. PLC ± -
2. PLC ± 0.13
3. PLC ± -
4. PLC ± -
ANGLES ± 0°30'

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH -

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

CAP,
3 CIRCUIT,
UNIVERSAL MATE-N-LOK(TM)

A1

00779

480701

—

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV AN4