

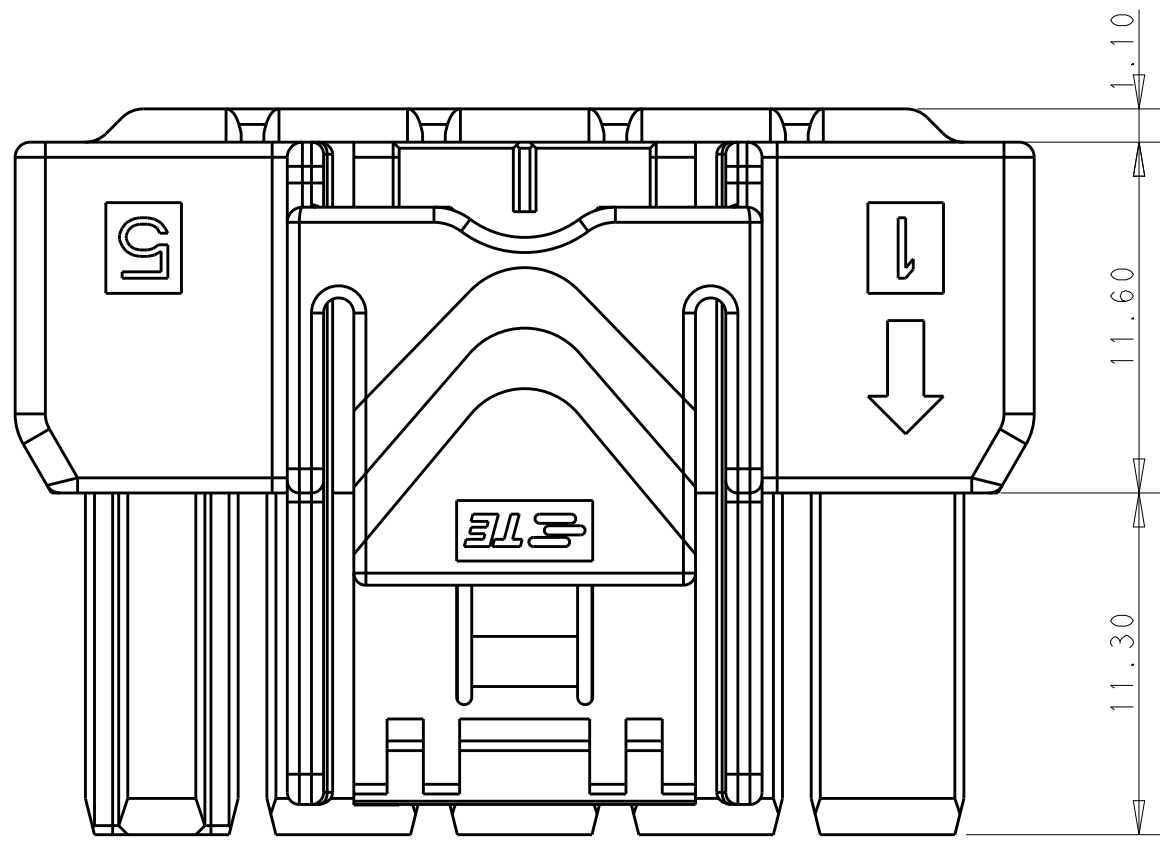
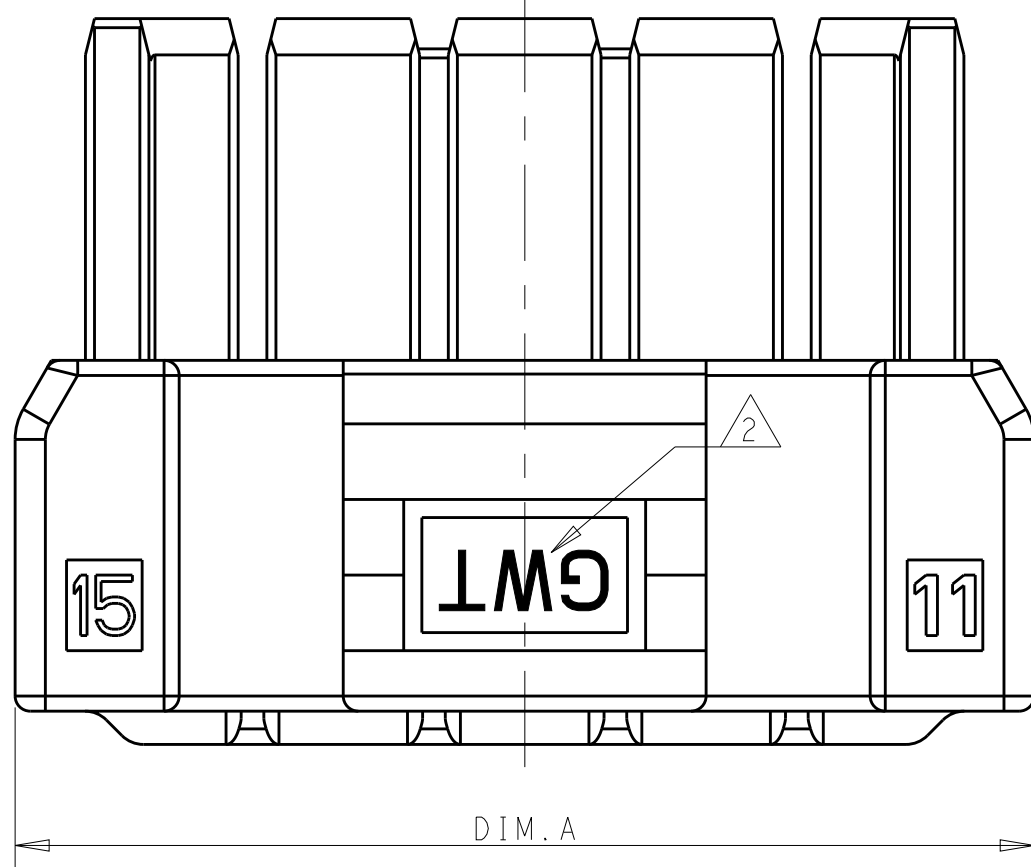
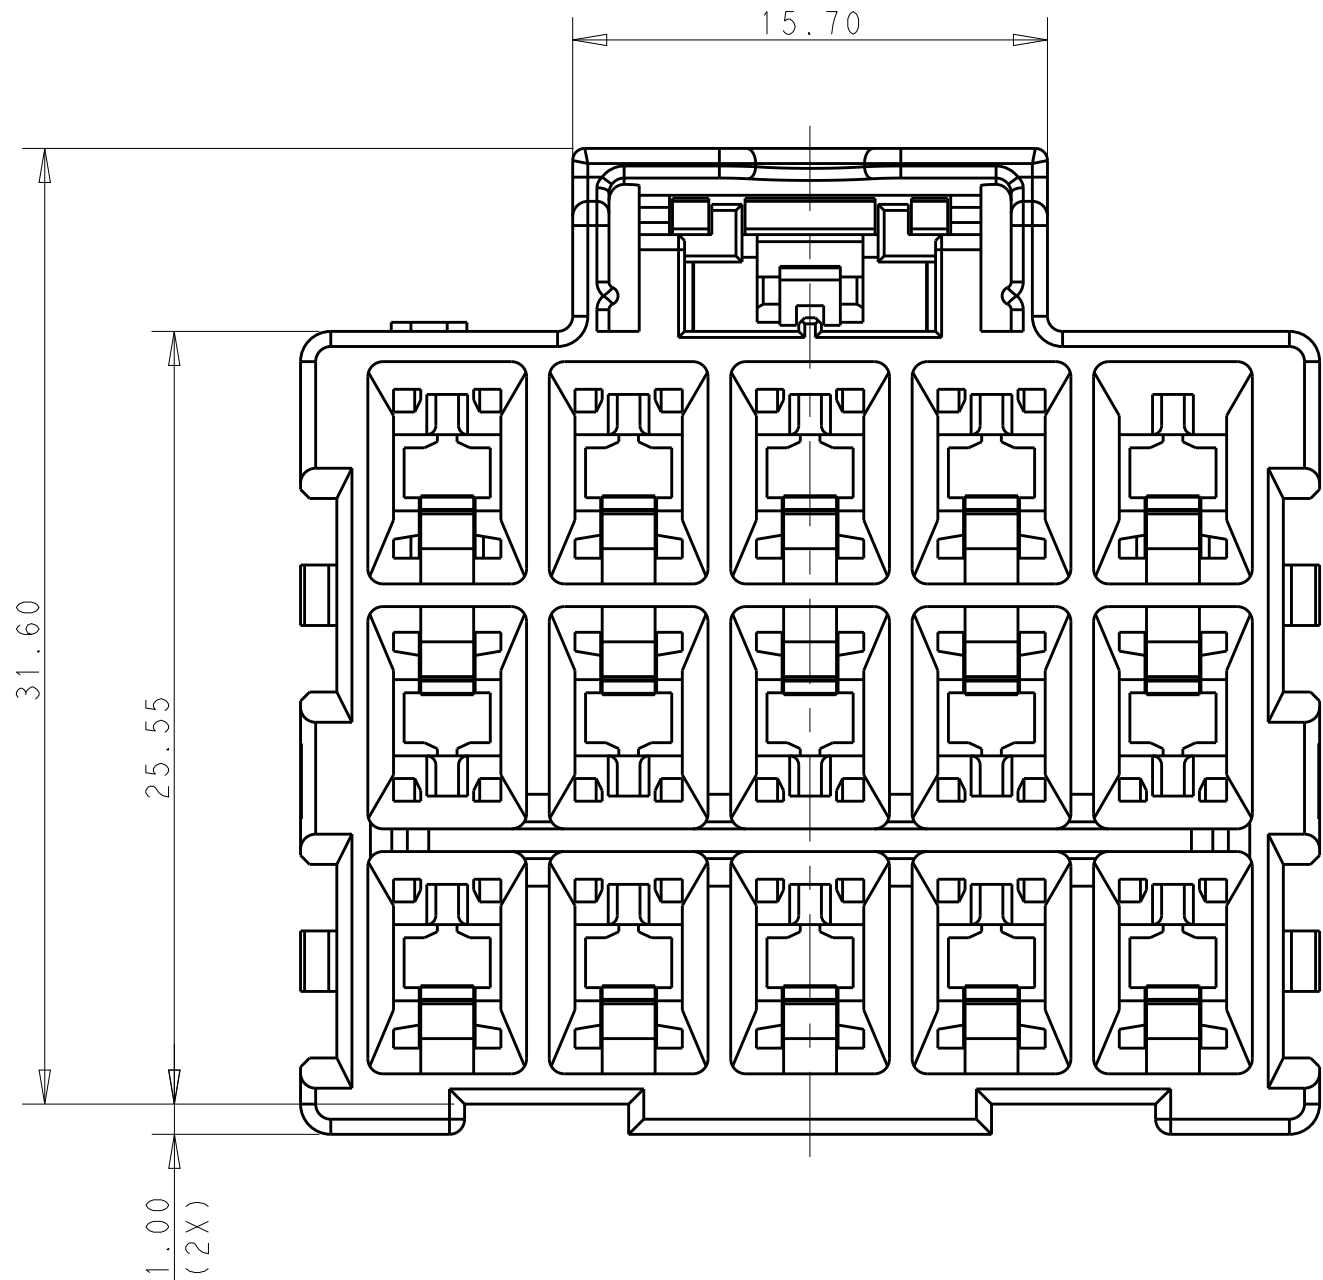


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		B1			REVISED PER ECO-16-014766	12OCT2016	RS	GJ

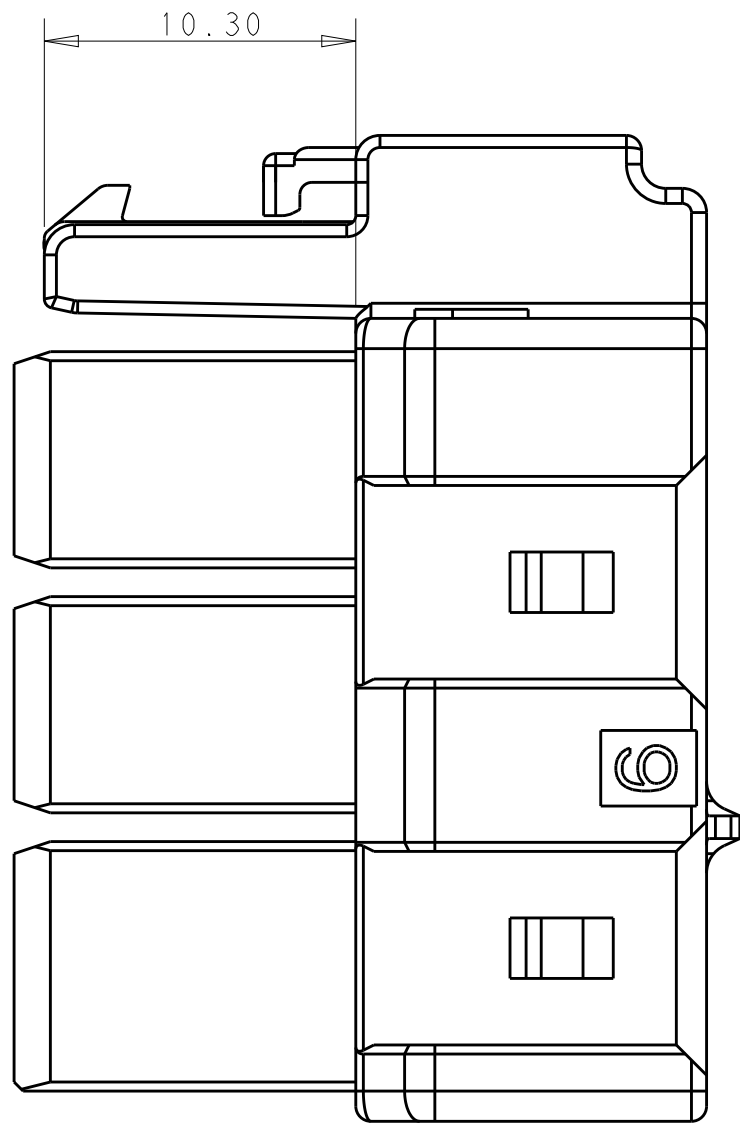

POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

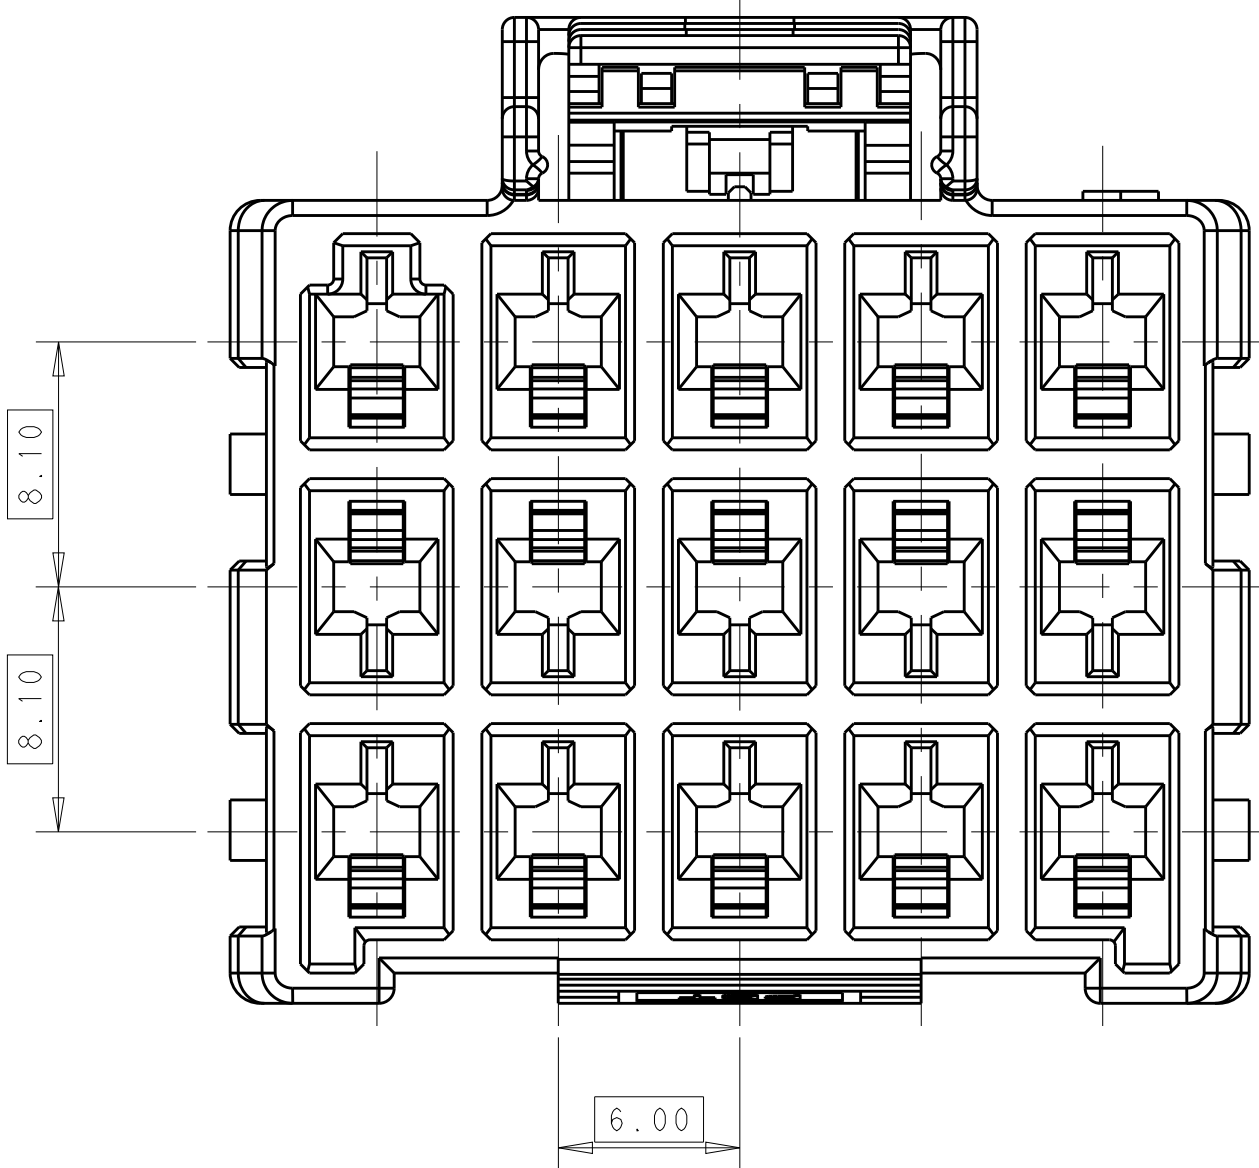

△ MATERIAL:
LEVEL A: PA6 ,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B: PBT,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0

△ MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWI





3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*

4. MATING CONN. P/N
CAP HSG: *-2232356/60-
DOUBLE ROW TPA: *-1971778-*;SINGLE ROW TPA: *-1971777-*


5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU	26MAR2013	TE Connectivity			
		CHK	HAPYE_WU	26MAR2013				
DIMENSIONS:		APVD	YUJHONG_MAO	26MAR2013	NAME			
mm					PRODUCT SPEC			
					108-106118			
					APPLICATION SPEC			
					114-106118			
					WEIGHT			
					-			
MATERIAL					Customer Drawing			
					SCALE			
					3:1			
					SHEET			
					1			
					OF			
					2			
					REV			
					B1			


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
-	-	-	-	-SEE SHEET 1-	-	-

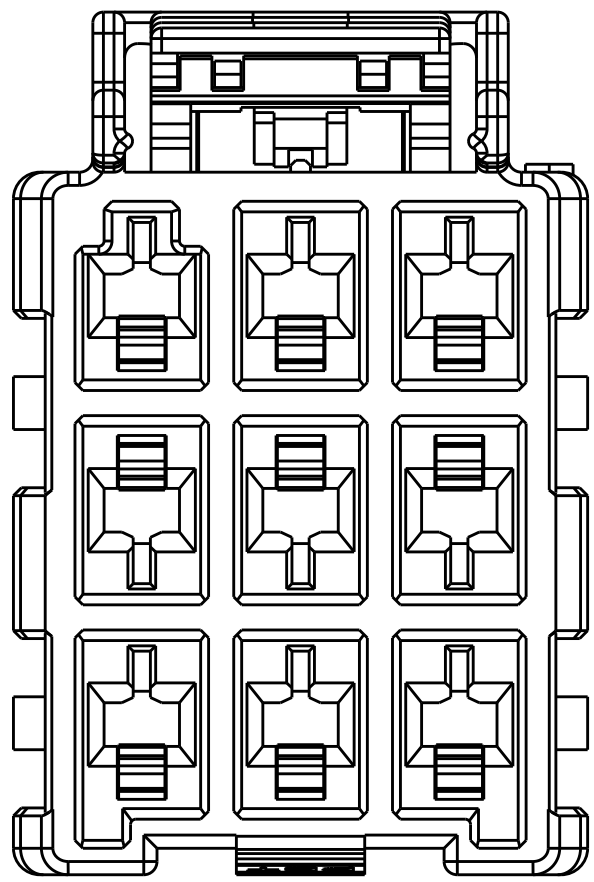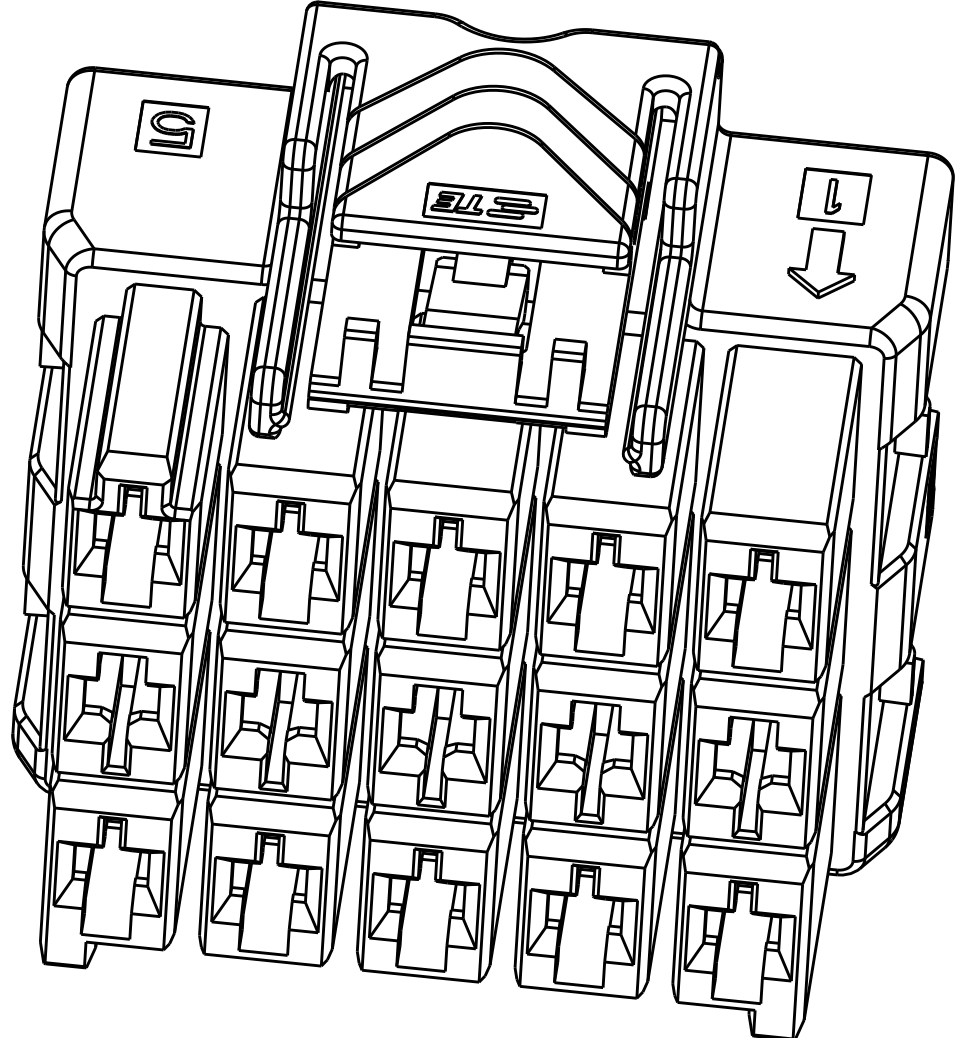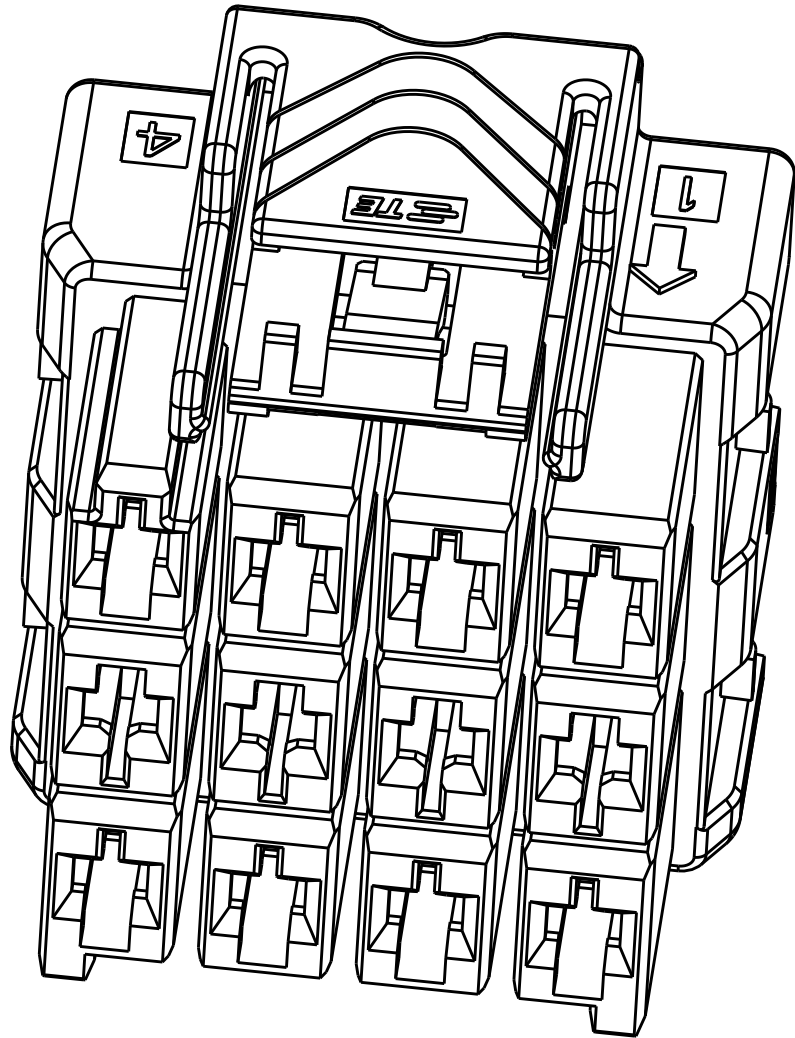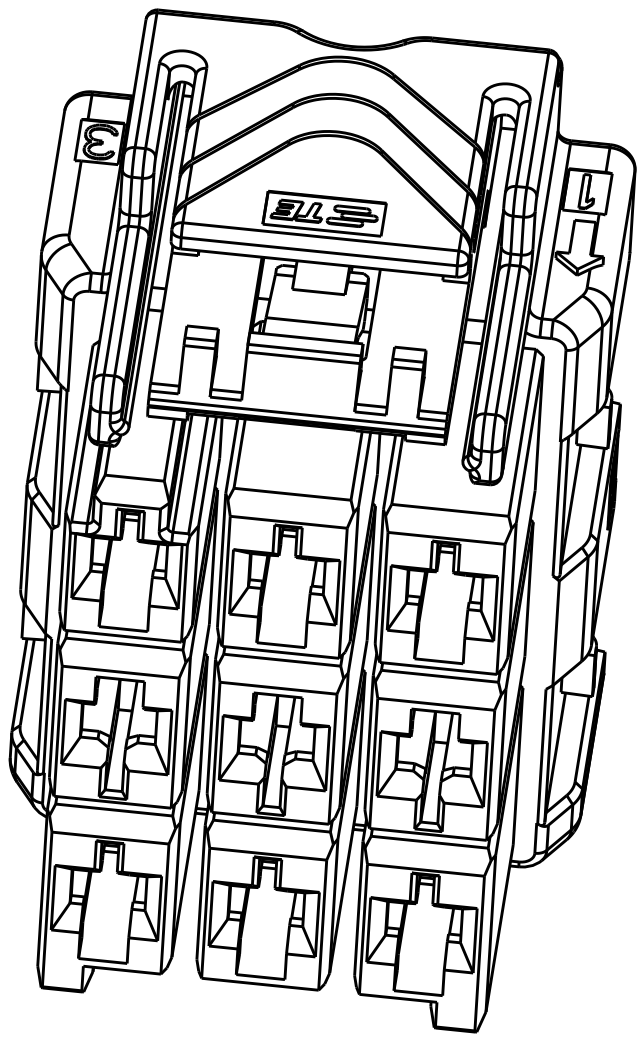

3*3 POSITIONS

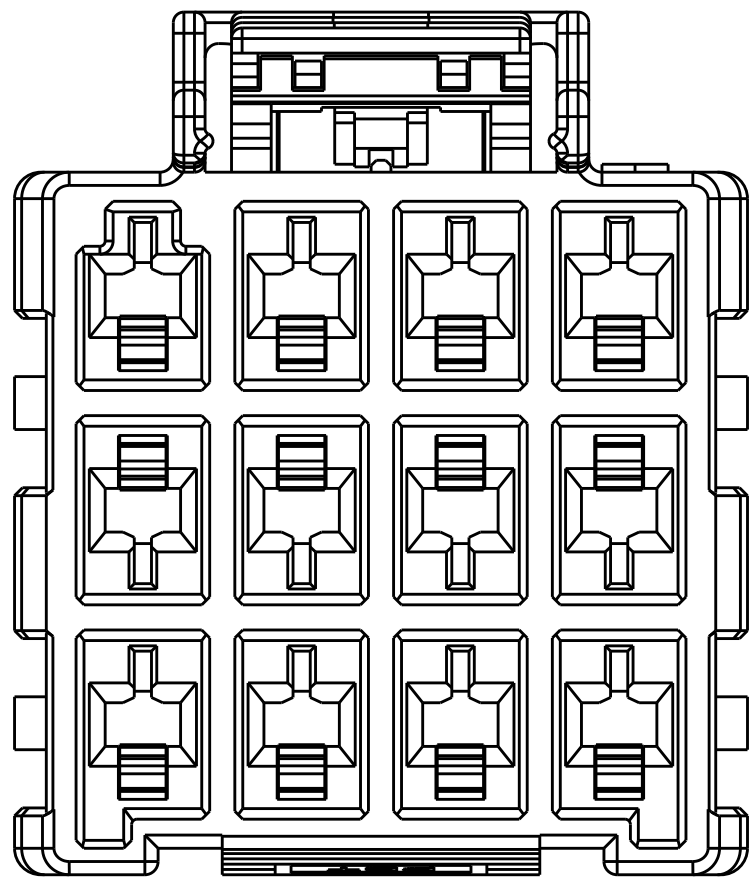


3*4 POSITIONS

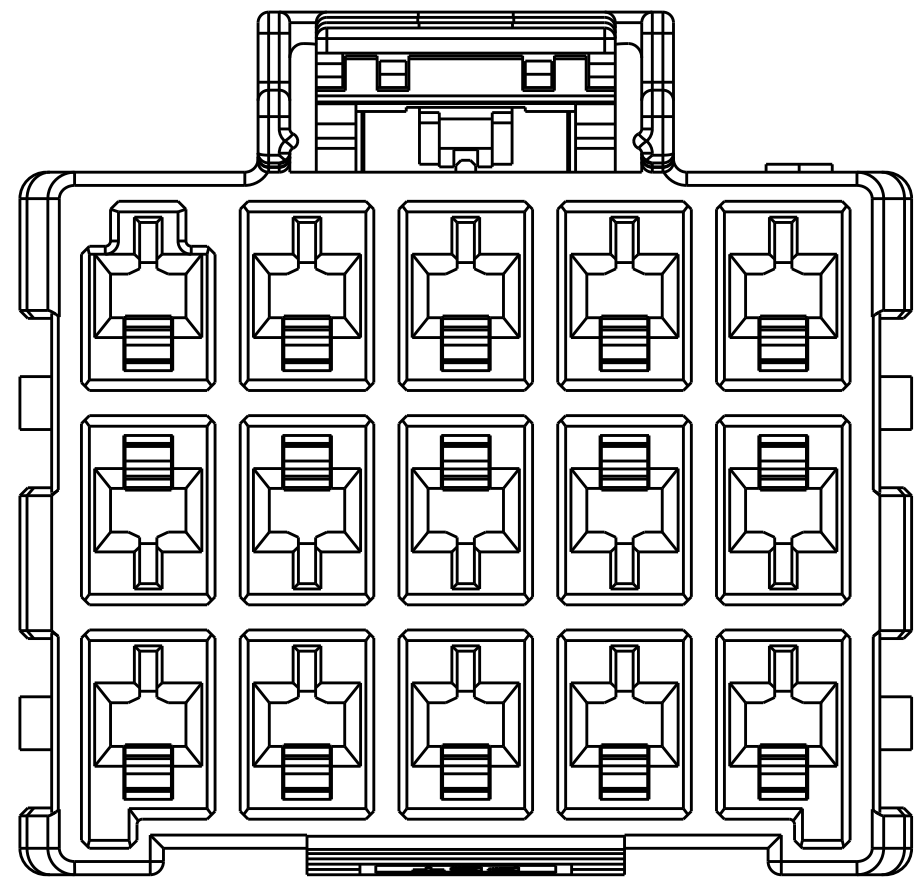


3*5 POSITIONS


3*5	LEVEL A	DARK GREY	KEY A	5-2232357-7
		BROWN	KEY B	6-2232357-7
		GREEN	KEY C	7-2232357-7
		ORANGE	KEY D	8-2232357-7
3*4	LEVEL A	BLACK	KEY A	1-2232357-5
		DARK GREY	KEY A	5-2232357-4
		BROWN	KEY B	6-2232357-4
		GREEN	KEY C	7-2232357-4
3*3	LEVEL A	ORANGE	KEY D	8-2232357-4
		BLACK	KEY A	1-2232357-4
		DARK GREY	KEY A	5-2232357-3
		BROWN	KEY B	6-2232357-3
POS.	MATERIAL	GREEN	KEY C	7-2232357-3
		ORANGE	KEY D	8-2232357-3
		BLACK	KEY A	1-2232357-6
		COLOR	KEY	P/N

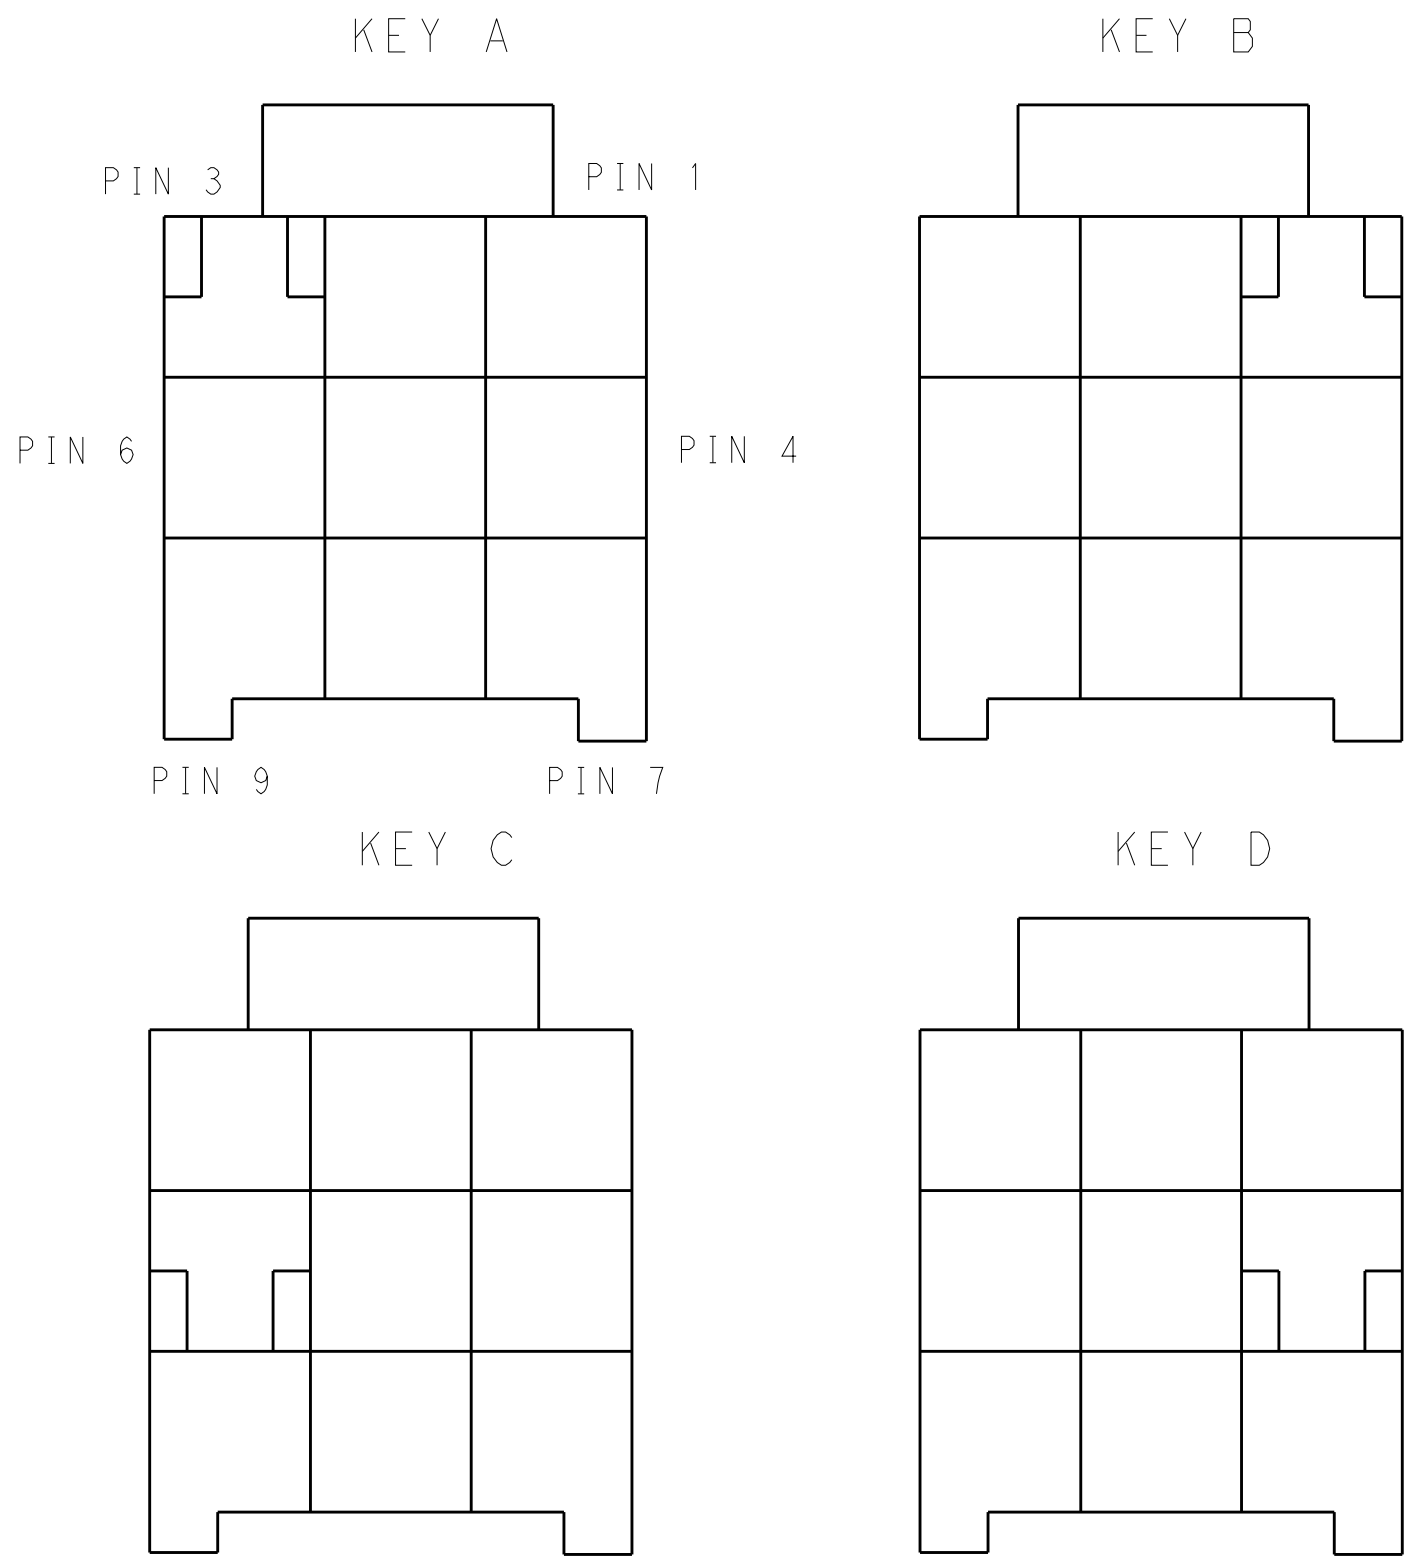

KEYING FOR 3*3 POS.

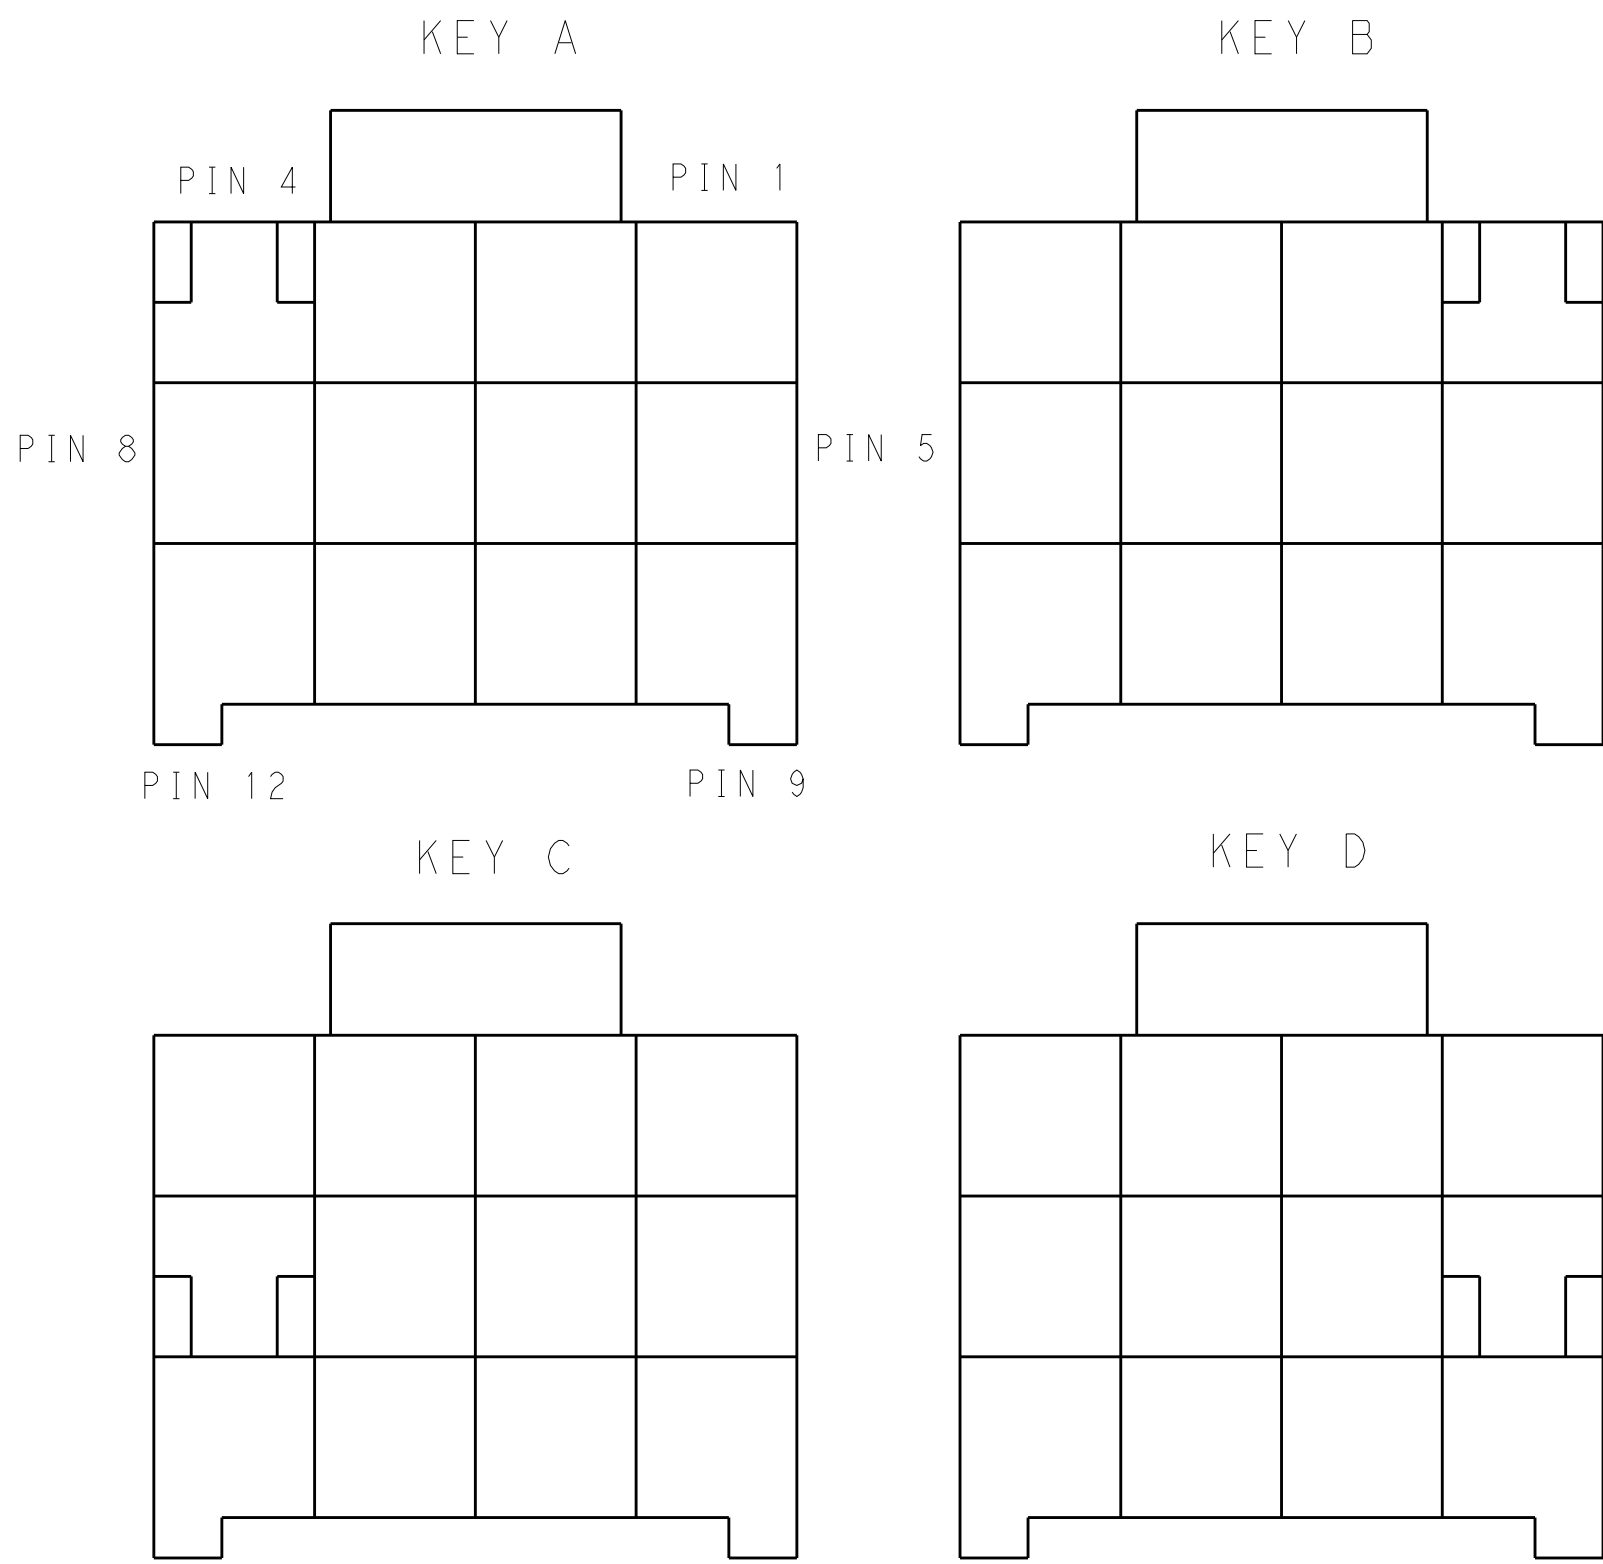

KEYING FOR 3*4 POS.

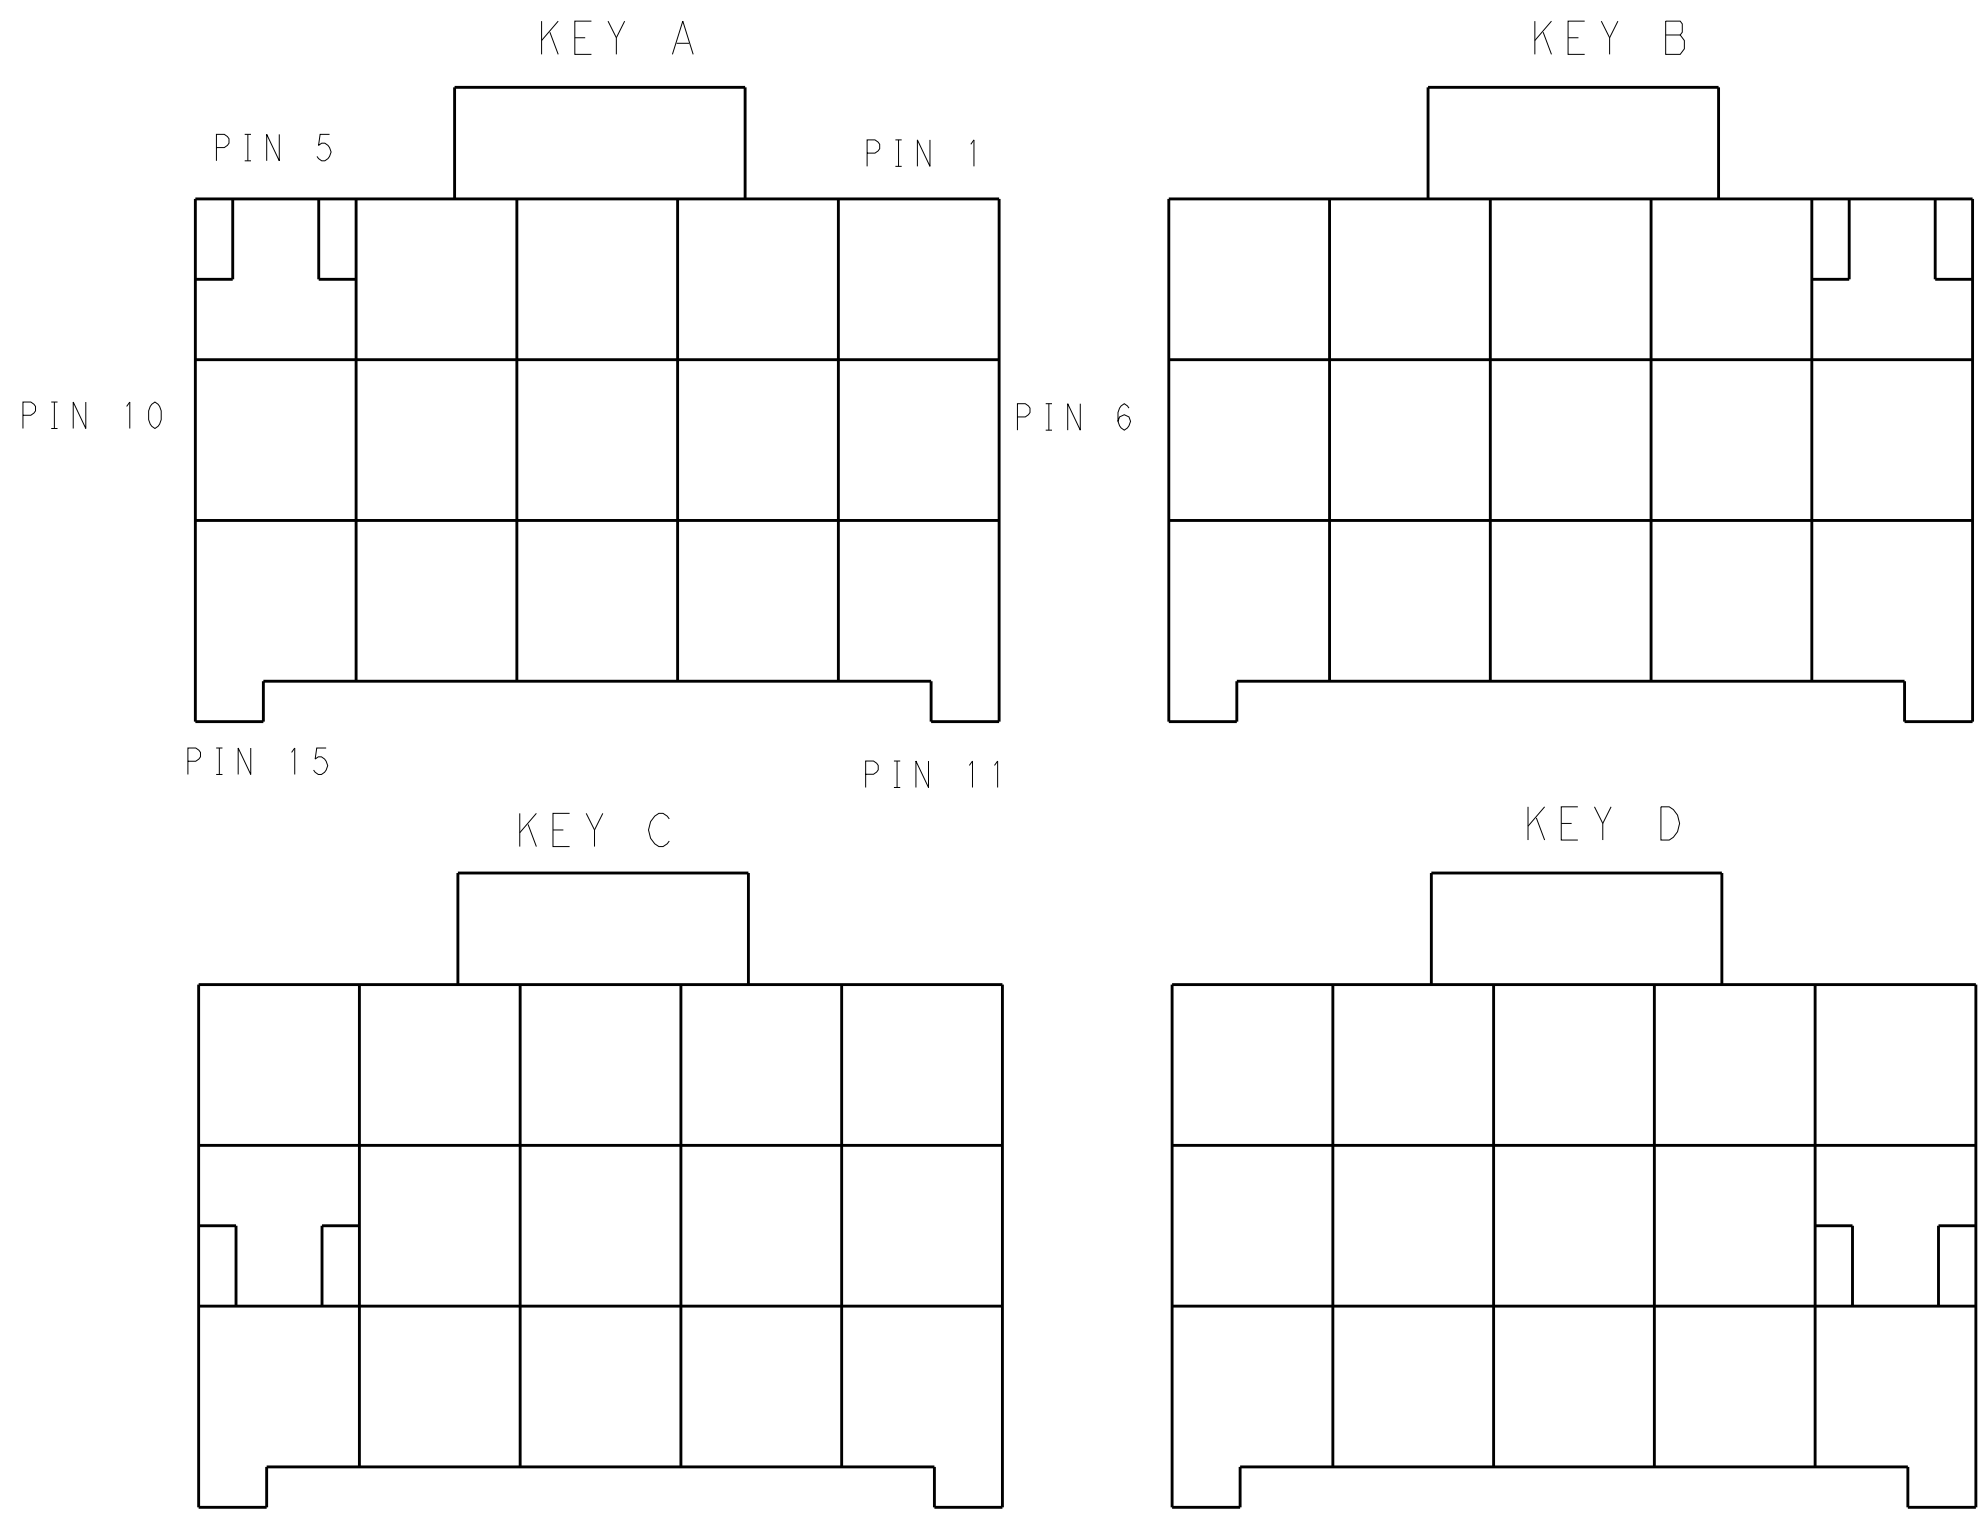

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU 26MAR2013		 TE Connectivity	
DIMENSIONS:		CHK HAPYE_WU 26MAR2013			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YUJHONG_MAO 26MAR2013			
mm		NAME			
		PRODUCT SPEC		PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK -	
		108-106118		SIZE CAGE CODE DRAWING NO	
		APPLICATION SPEC			
		114-106118			
MATERIAL		WEIGHT		RESTRICTED TO	
-		-		-	
FINISH		Customer Drawing		A100779C=2232357	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-		-	
-		-			