

MKDSO 2,5/ 4-R

Order No.: 1707247

Illustration shows different articles for putting together the upper part of the housing



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1707247>

PC terminal block, Nominal current: 24 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 4, Type of connection: Screw connection, Mounting: Soldering, Conductor/PCB connection direction: 0 °, Color: green, Article with lateral pin exit

Commercial data

GTIN (EAN)	
sales group	F057
Pack	50 pcs.
Customs tariff	85369010
Catalog page information	Page 81 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals




Certification


CB, CCA, CSA, CUL, GOST, UL, VDE-PZI

Diagrams/Drawings


Drilling plan/solder pad geometry

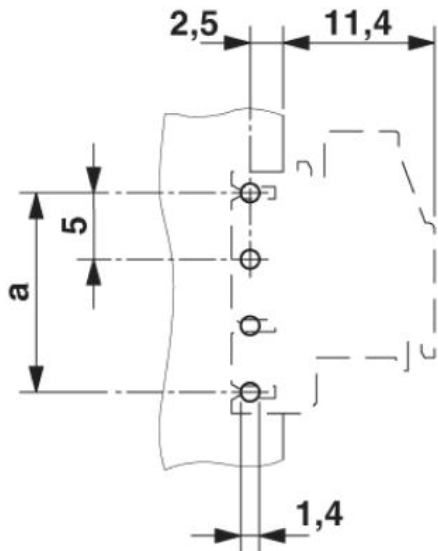

Dimensioned drawing

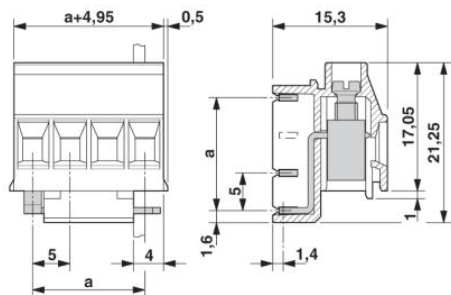

Schematic diagram

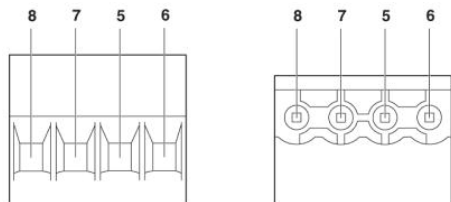

Pin assignment right

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;