

## Device connector, front mounting - SF-7EP1N8AAC00S - 1617919

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector, front mounting, angled rotatable, increased flange dimension, Screw locking, M23, number of positions: 4+3+PE, type of contact: Pin, Crimp connection, Axial O-ring, 4x Ø 3.2, shielded: yes, flange dimensions: 28 mm x 28 mm, Compatible with mating connectors with SPEEDCON or M23 standard knurled nuts

RoHS

### Key Commercial Data

Packing unit	16 pc
GTIN	 4 046356 581974
GTIN	4046356581974


### Technical data

Product type	Circular connectors (device side)
Number of positions	4+3+PE
Coding	N
Type	Device connector for front wall
Mounting type	4x Ø 3.2
Rated current (IEC)	30
Rated voltage (IEC)	630
Thread	M23
Shielding	yes
Signal type	Power


### Drawings

## Device connector, front mounting - SF-7EP1N8AAC00S - 1617919

Dimensional drawing




Schematic diagram




Connector pin assignment

Drill holes

Dimensional drawing

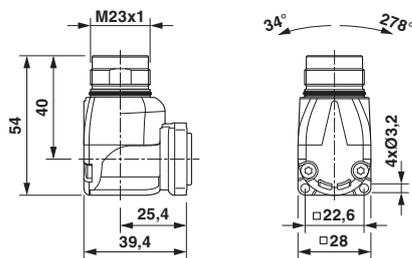

Diagram

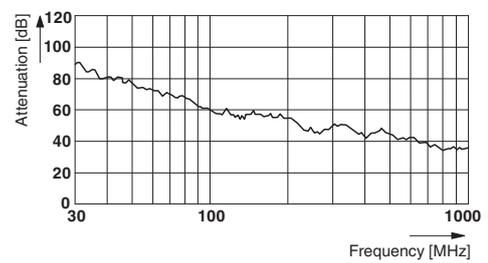

Dimensional drawing

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>