

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0464373002

Status:

Active

Overview:

EXTreme Ten60Power™ High-Current Connector

Description:

2.54mm, 5.50mm Pitch EXTreme Ten60Power™ Right Angle Plug Assembly with Guide Pins, 24 Signal Circuits, 4 DC Power Circuits

Documents:

3D Model

Application Specification AS-46436-100 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-46436-100 (PDF)

Agency Certification


CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	PCB Headers
Series	46437
Application	Board-to-Board, Power, Signal
Comments	See PS-46436-100 for details
Overview	EXTreme Ten60Power™ High-Current Connector
Product Name	EXTreme Ten60Power™
UPC	883906917937

Physical

(p)ower-(s)ignal Configuration	24s - 4p
Breakaway	No
Circuits (Loaded)	28
Circuits (maximum)	28
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Mated Height	18.00mm
Material - Metal	Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	18.452/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.84mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm, 5.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No

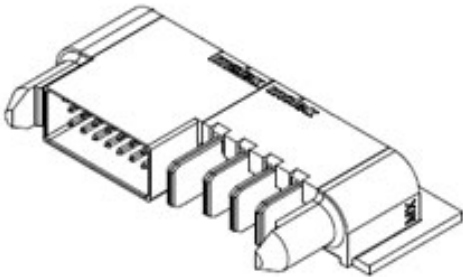

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

46437 Series

Mates With

EXTreme Ten60Power™ Vertical
Receptacle 46436-3002 , 46562-3002

Temperature Range - Operating

Termination Interface: Style

-40°C to +105°C

Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact

Voltage - Maximum

2.5A, 60.0A

600V AC / 250V DC

Material Info

Reference - Drawing Numbers

Application Specification

Product Specification

Sales Drawing

AS-46436-100

PS-46436-100

SD-46437-302

This document was generated on 06/29/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION