

## Panel mounting base - RC-0000000WQ00 - 1593021

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel mounting base, straight, Screw locking, M23, Radial O-ring, 4x Ø2,7, shielded: yes, panel thickness min.: 3 mm

RoHS

### Key Commercial Data

Packing unit	40 pc
Minimum order quantity	40 pc
GTIN	 4 046356 193832
GTIN	4046356193832

### Technical data

#### General

Type of locking	Screw locking
Pg housing screw connection	none
Mounting type	4x Ø2,7

#### Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

#### Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

#### Specifications according to DIN EN 61984:2001

Installation height max.	2000 m
--------------------------	--------

#### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
------------	--

# Panel mounting base - RC-0000000WQ00 - 1593021


## Technical data

### Environmental Product Compliance


	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
--	---

## Drawings


Dimensional drawing

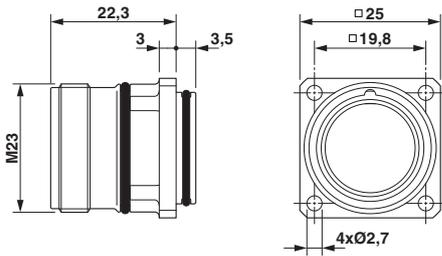


Diagram

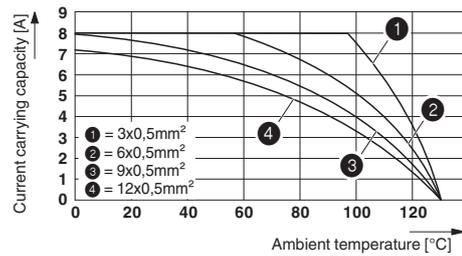

Diagram

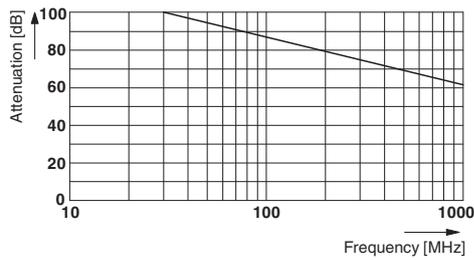

Dimensional drawing



Installation dimensions  
Flat gasket, radial O-ring

## Approvals

### Approvals

Approvals

EAC

Ex Approvals

### Approval details

EAC		B.01742
-----	--	---------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>