### Features/Benefits

- Variety of actuators and terminations
- Panel mount tabs available
- Epoxy terminal seal-compatible with bottom-wash cleaning
- RoHS compliant



Models Available

#### **Specifications**

CONTACT RATING: B contact material: 0.4 VA max. @ 20 V AC or DC max. Q contact material: 6 AMPS @ 120 V AC or 28 V DC, 3 AMPS @ 250 V AC. See page I-15 for additional ratings.

- ELECTRICAL LIFE: 100,000 make-and-break cycles at full load on models with B, K or P contact material; 40,000 cycles on models with G, Q, L, M, S or R contact material.
- CONTACT RESISTANCE: Below 10 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts. INSULATION RESISTANCE:  $10^9 \Omega$  min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level. OPERATING TEMPERATURE: -30°C to 65°C

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

Typical Applications

- Test & measurement equipment
- Telecommunications
- Computer & peripherals



#### Materials

CASE: diallyl phthalate (DAP), (UL 94V-0).

ACTUATOR: Nylon, black, standard.

HOUSING: Stainless steel.

SWITCH SUPPORT: Brass or steel, matte-tin plated.

- END CONTACTS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Coin silver, silver plated. See page I-16 for additional contact materials.
- CENTER CONTACT & ALL TERMINALS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Copper alloy, silver plated. See page I-16 for additional contact materials.
- TERMINAL SEAL: Epoxy. Refer to Soldering and Cleaning in Technical Data chapter


NOTE: Any models supplied with Q, B, G, P, S or R contact material are RoHS compliant.

NOTE: Specifications and materials listed above are for switches with standard options.

For information on specific and custom switches, consult Customer Service Center.


#### **Build-A-Switch**

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages I-12 through I-16. For additional options not shown in catalog, consult Customer Service Center. All models have epoxy terminal seal and are compatible with all "bottom-wash" PCB cleaning methods.

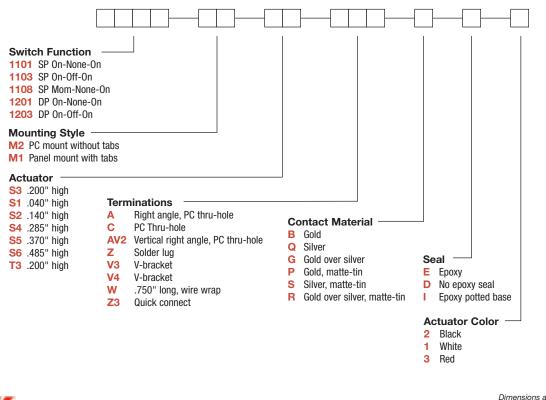




Dimensions are shown: Inches (mm) Specifications and dimensions subject to change

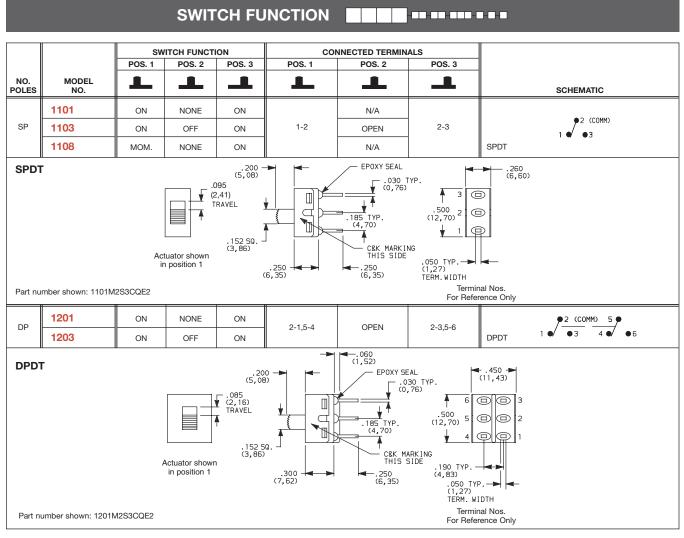

#### MOM. = Momentary

Slide


All models cRus with all options when ordered with G, Q, S or R contact material.

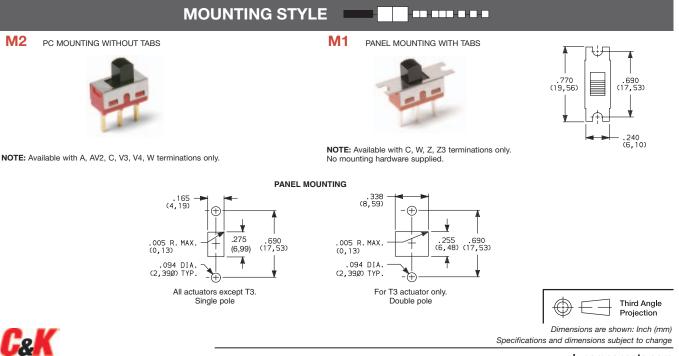

www.ck-components.com

 $\square$ 

Slide

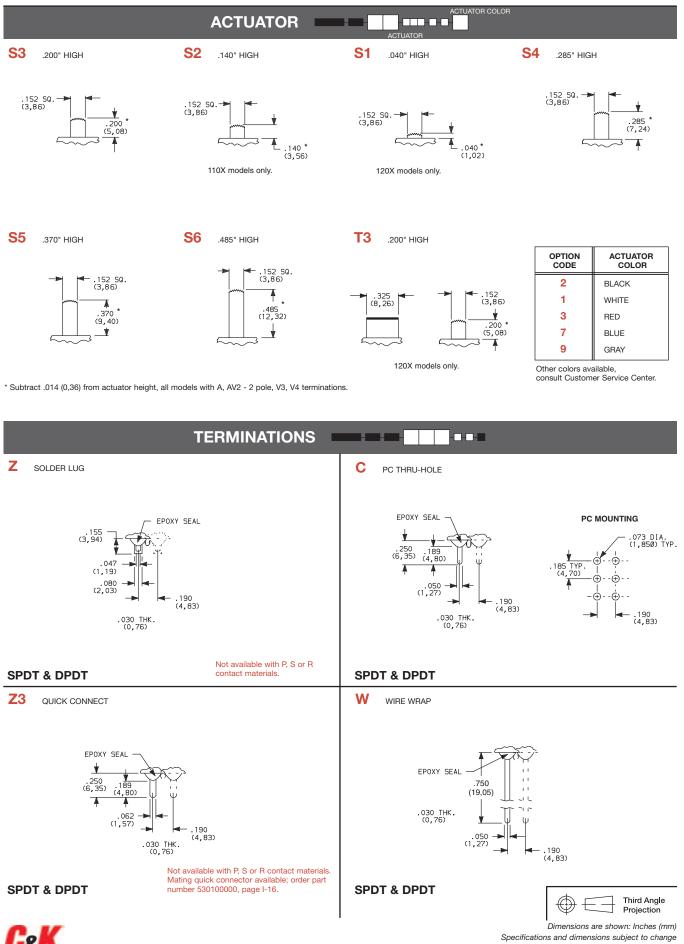


www.ck-components.com

**TERMINATIONS** T


RIGHT ANGLE, PC THRU-HOLE

П


Slide

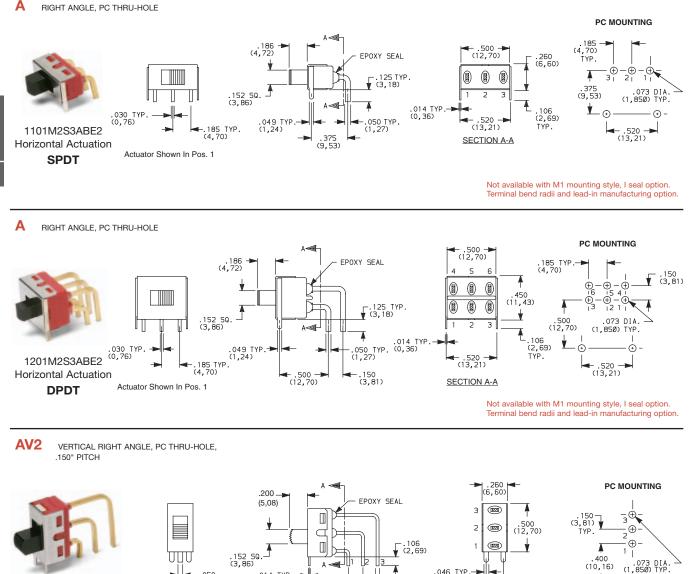


1101M2S3AV2BE2 Vertical Actuation SPDT




.014 TYF (0,36) -.150 TYP. (3,81) **4**.400 ► (10,16) .030 TYP. (0,76)





Not available with M1 mounting style, I seal option. Terminal bend radii and lead-in manufacturing option.






Π

Slide

q

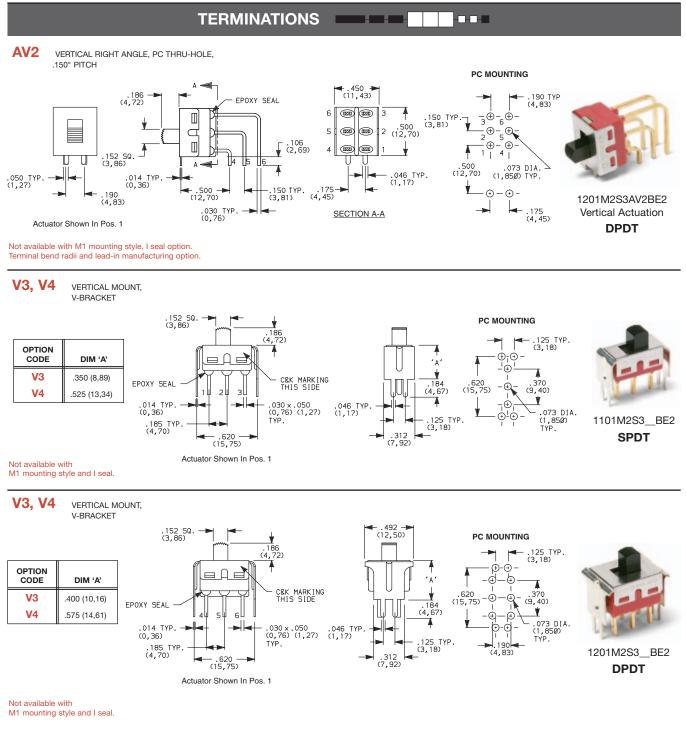



Specifications and dimensions subject to change

www.ck-components.com

## CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
В	GOLD 1	GOLD <sup>3</sup>	LOW LEVEL/	
Р		MATTE-TIN 6	1	0.4 VA MAX. @ 20 V AC OR DC MAX.
Q	SILVEB 4,5	GOLD <sup>3</sup>	POWER	6 AMPS @ 120 V AC OR 28 V DC; 3 AMPS @ 250 V AC.
S		MATTE-TIN <sup>6</sup>		U AIVIF 3 1 120 Y AU UN 20 Y DU, 3 AIVIF 3 1 200 Y AU.
G	GOLD OVER	GOLD <sup>3</sup>	LOW LEVEL/DRY	0 4 VA MAX @ 20 V AC OR DC MAX OR 6 AMPS @ 120 V AC OR
R	SILVER <sup>2,3</sup>	MATTE-TIN <sup>6</sup>	CIRCUIT OR POWER	0.4 MAX. 28 V DC; 3 AMPS @ 250 V AC.

Slide

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

<sup>1</sup> CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.

- <sup>2</sup> END CONTACTS: Coin silver, with gold plate over nickel plate.
- <sup>3</sup> CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.
- <sup>4</sup> END CONTACTS: Coin silver, silver plated.
- <sup>5</sup> CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.
- <sup>6</sup> TERMINALS: Copper alloy, with matte-tin over nickel plate.

**NOTE:** Any models supplied with Q, B, G, P, S or R contact material are RoHS compliant.

All models cNus with all options when ordered with G, Q, S or R contact material.

------

B contact material standard with all terminations except C, Z, Z3..

Q contact material standard with C, Z, Z3 terminations.

P, S or R contact materials not available with Z, Z3 terminations.



## AVAILABLE HARDWARE

Fits Z3 Termination female connector



PART NO. 530100000 Available in loose pieces.

