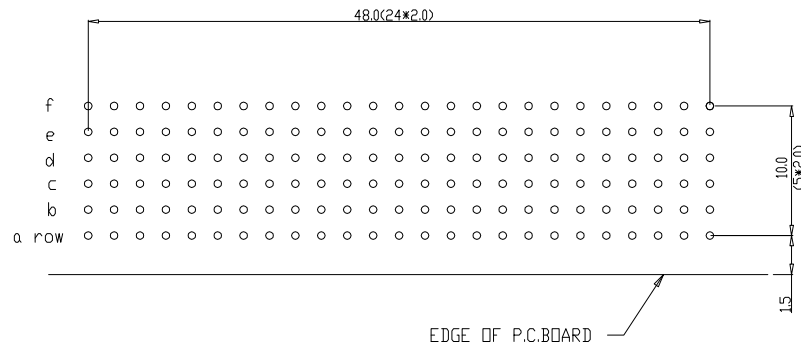
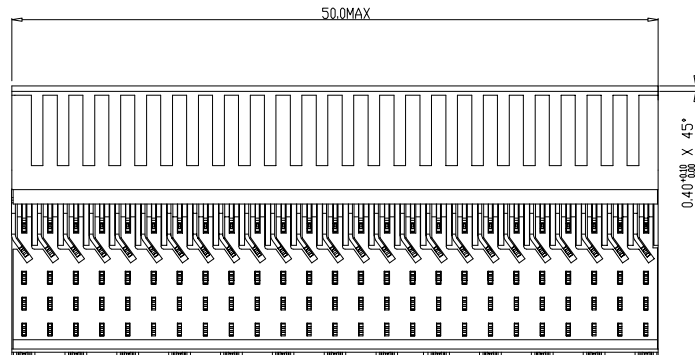
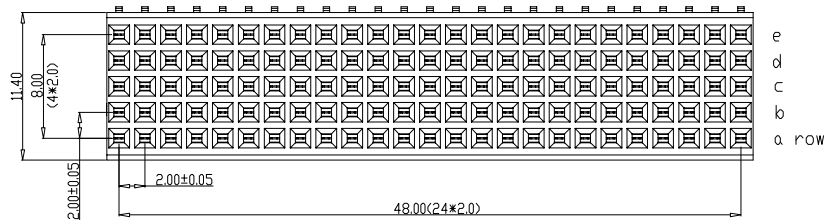


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
 CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 m Ω MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref	
Mat code		✓ TOLERANCE	
Heat treat		1DEC ±0.2 1DEC	
Plating/Finish		2DEC ±0.1 2DEC	
Dr	10 2 92	J.V.B	
Eng			Product family
Chr			Model Name
Appr			Model Revision
		size	Scale
		A1	5.000
		REL Level	
		BS.C .201444.044	Rev.
		CUSTOMER DRAWING	sheet 1 of 1

rev	ecn no	dr	date
A	CONVERSION REVISION	KN	14-9-01
B	105-0081	ALEX	31/06/05
C	DG05-0278	kason	02-08-05
D	DG07-0362	kason	05/09/07
E	DG10-0110	NZ	10/13/10
-	-	-	-
06	BEC 9.3546	RM	11-06-01