



**Mallory Sonalert Products, Inc.**

Part #:

**MSE14LDP3S**

## Sales Outline Drawing

Revision:


**B**

### Specifications:

|                       |                               |
|-----------------------|-------------------------------|
| Sound Level Category  | Loud                          |
| Mode of Operation     | Slow Double Pulse @ 0.5 PPS   |
| Voltage Rating        | 7 to 14 VDC                   |
| Frequency             | 3900 ± 500 Hz                 |
| Loudness @ 1 FT       | 85 to 95 dB(A) Typ.           |
| Current Draw          | 50mA MAX                      |
| Housing Material      | Valox (UL94V-0), Color: Black |
| Storage Temperature   | -40° to +80° C                |
| Operating Temperature | -40° to +65° C                |
| Weight (Typical)      | 4.0g                          |
| Options               | Please contact factory.       |

### Dimensions: Inches (mm)

**ROHS Compliant**

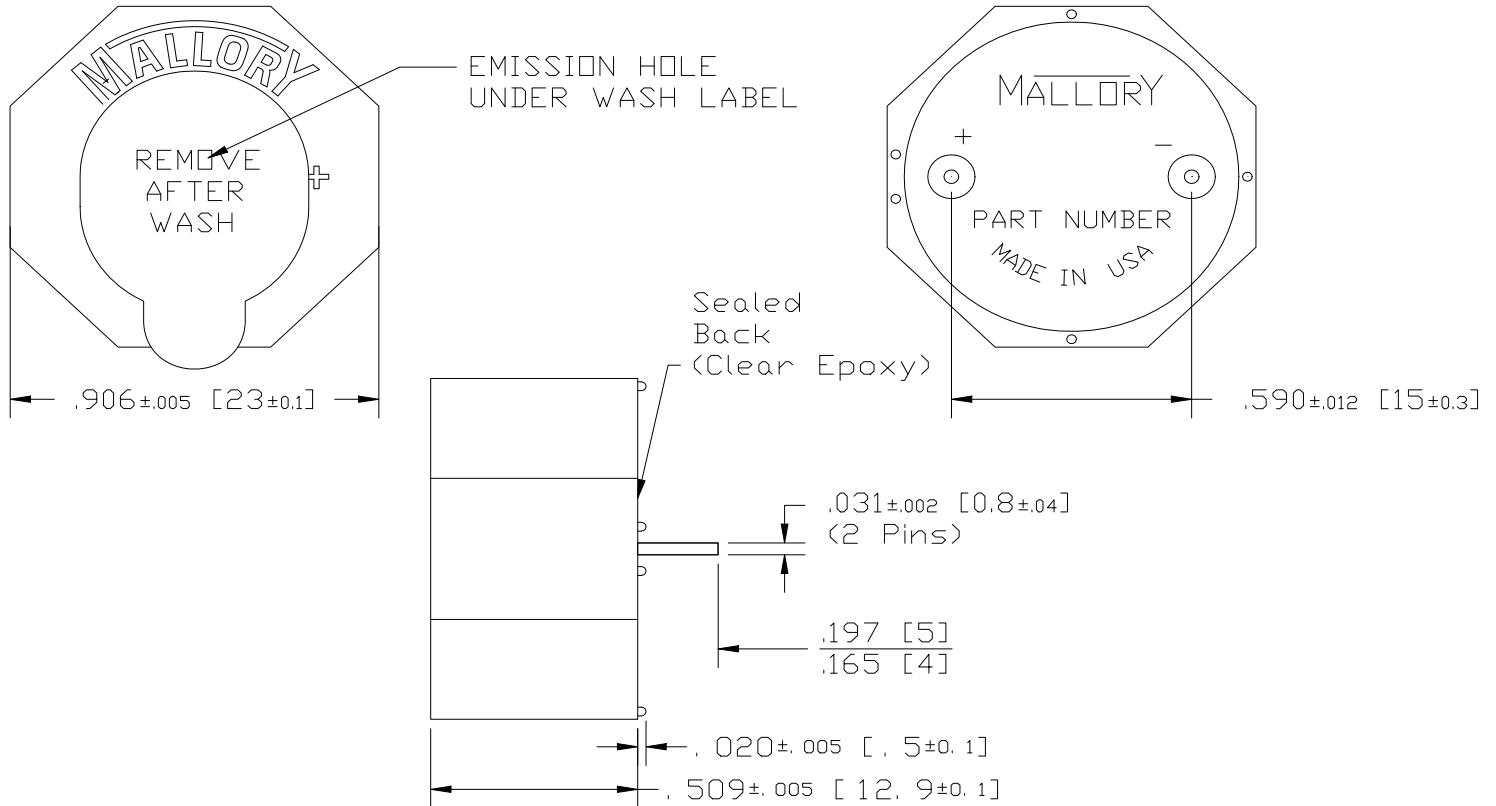

NOTE A:  
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:  
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.  
UNITS ARE SUITABLE FOR WAVE SOLDERING AND AQUEOUS WASH WHEN THE EMISSION  
HOLE IS COVERED WITH A WASH LABEL. RECOMMENDED MAXIMUM TEMPERATURE AND  
TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.