

CODE 24 - HEAT SHRINK BOOT BACKSHELL




208M620-19C-D

SERIES _____
 SHELL SIZE (TABLE 1) _____
 MATERIAL _____
 REFER TO CH00-0250-004
 FINISH _____
 REFER TO CH00-0250-004
 MODIFICATION CODE _____
 REFER TO CH00-0250-004 (2)

NOTES:

1. THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- (2) FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
3. BACKSHELL TO BE PERMANENTLY MARKED/BAGGED AND LABELLED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g. 06090-208M612-19A).
4. KNURL INSIDE BOOT GROOVE MAY BE SUPPLIED AT MANUFACTURER'S OPTION.
5. BACKSHELL MATES TO MIL-C-26482 SERIES I, CLASS E, F AND P, MS3114 AND MS3124 CONNECTORS.
- (6) ANTI-ROTATIONAL SET SCREW, THREE #4-40 THREADED HOLES 120° APART, SINGLE MATING SET SCREW SUPPLIED.

If this document is printed it becomes uncontrolled. Check for the latest revision

| | | | | | |
|------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DRAWN | K.WINCZURA | DATE 11/06/2015 |  3RD ANGLE PROJECTION NOT TO SCALE | TITLE: HEAT SHRINK BOOT BACKSHELL |  Polamco  TE connectivity |
| CHECKED | | 11/06/2015 | | | |
| APPROVED | K.SHEPPARD | 10/07/2015 | | | |
| APPROVED | H.SMITH | 16/07/2015 | | | |
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1° | | | ASSY USED ON: MIL-DTL-26482 SERIES I, CLASS E, F AND P MS3114 AND MS3124 RECEPTACLE CONNECTORS. | | |
| REVISIONS | | | | | |
| LTR | DESCRIPTION | DATE | APPROVED | | |
| A | REVISED PER ECN AD93032 | | | | |
| B | REVISED PER ECO-15-010346 | 16/07/2015 | H.SMITH | | |
| TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792 | | | | TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION. | DRAWING NO: 208M6XX |
| | | | | DRAWING REV: B | SHT 1 |

ANTI-ROTATIONAL
SET SCREW



MEDIUM DIAMOND
KNURL

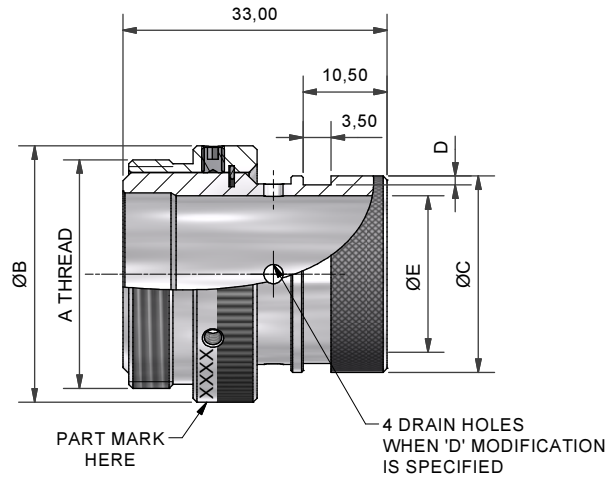



TABLE 1

| BASE PART NUMBER | SHELL SIZE | A THREAD | ØB MAX | D +0,20/-0,00 | ØE | ØC MAX |
|---------------------|---------------|--------------|-----------|------------------|-------|-----------|
| 208M608 | 08 | 5/8-24UNEF | 19,8 | 1,12 | 7,00 | 13,50 |
| 208M610 | 10 | 3/4-20UNEF | 23,1 | 1,12 | 10,00 | 15,40 |
| 208M612 | 12 | 7/8-20UNEF | 26,2 | 1,12 | 13,50 | 19,70 |
| 208M614 | 14 | 1-20UNEF | 29,5 | 1,12 | 16,50 | 21,30 |
| 208M616 | 16 | 1 1/8-18UNEF | 32,5 | 1,12 | 19,50 | 24,50 |
| 208M618 | 18 | 1 1/4-18UNEF | 35,8 | 1,12 | 22,25 | 27,75 |
| 208M620 | 20 | 1 3/8-18UNEF | 38,9 | 1,75 | 25,00 | 31,00 |
| 208M622 | 22 | 1 1/2-18UNEF | 42,2 | 1,75 | 28,50 | 34,40 |
| 208M624 | 24 | 1 5/8-18UNEF | 45,2 | 1,75 | 30,00 | 36,60 |

If this document is printed it becomes uncontrolled. Check for the latest revision

| DRAWN | K.WINCZURA | DATE | 11/06/2015 | <p>3RD ANGLE PROJECTION NOT TO SCALE</p> | <p>TITLE:</p> <p>HEAT SHRINK BOOT BACKSHELL</p> | <p>Polamco</p> | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-------------------------|-----|-------------|------|----------|---|-------------------------|--|--|---|---------------------------|------------|---------|
| CHECKED | | 11/06/2015 | | | | | | | | | | | | | | | | |
| APPROVED | K.SHEPPARD | 10/07/2015 | | | | | | | | | | | | | | | | |
| APPROVED | H.SMITH | 16/07/2015 | | | | | | | | | | | | | | | | |
| <p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°</p> | | | | <p>ASSY USED ON:</p> <p>MIL-DTL-26482 SERIES I, CLASS E, F AND P MS3114 AND MS3124 RECEPTACLE CONNECTORS.</p> | | | | | | | | | | | | | | |
| <p>REVISIONS</p> <table border="1"> <tr> <th>LTR</th> <th>DESCRIPTION</th> <th>DATE</th> <th>APPROVED</th> </tr> <tr> <td>A</td> <td>REVISED PER ECN AD93032</td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>REVISED PER ECO-15-010346</td> <td>16/07/2015</td> <td>H.SMITH</td> </tr> </table> | | | | | | | LTR | DESCRIPTION | DATE | APPROVED | A | REVISED PER ECN AD93032 | | | B | REVISED PER ECO-15-010346 | 16/07/2015 | H.SMITH |
| LTR | DESCRIPTION | DATE | APPROVED | | | | | | | | | | | | | | | |
| A | REVISED PER ECN AD93032 | | | | | | | | | | | | | | | | | |
| B | REVISED PER ECO-15-010346 | 16/07/2015 | H.SMITH | | | | | | | | | | | | | | | |
| <p>TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792</p> | | | | <p>TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.</p> | | | | | | | | | | | | | | |
| <p>DRAWING NO: 208M6XX</p> | | | | <p>DRAWING REV: B</p> | | <p>SHT 2</p> | | | | | | | | | | | | |