

Customer Information Sheet

DRAWING No.: H2176-XX

SHEET 2 OF 2


IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

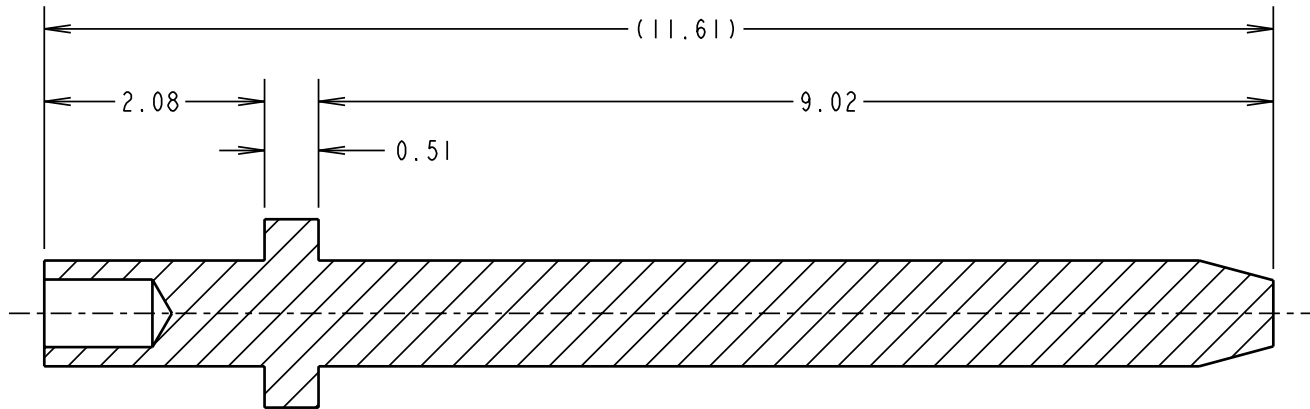

SECTION X-X

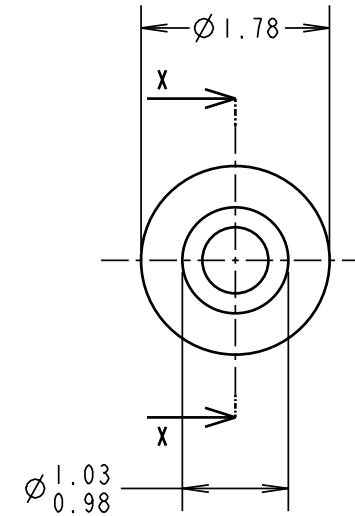

NOTES:

1. RECOMMENDED MOUNTING HOLE SIZE = $\varnothing 1.04-1.14\text{mm}$.
2. RECOMMENDED PANEL THICKNESS = 1.6mm.
3. ALL TOLERANCES ARE ± 0.13 UNLESS OTHERWISE STATED.
4. PUNCH & DIE TOOL PART No. = Z2176-00.

ORDER CODE:

H2176-XX

FINISH: _____
01 = TIN
05 = GOLD

JAE 6 24.04.03 7380

NAME ISS. DATE C/NOTE

APPROVED: P. COLLINS

CHECKED: W. J. BOURNE

DRAWN: J. PHILIPSON

CUSTOMER REF.:

ASSEMBLY DRG:

HARWINHARWIN INC
U.S.A.TEL: (812) 542 2546
FAX: (812) 542 2541HARWIN PLC
U.K.TEL: 023 9237 0451
FAX: 023 9231 4590HARWIN PTE
SINGAPORETEL: 65 6779 4909
FAX: 65 6779 3868

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = $\pm 1\text{mm}$
X.X = $\pm 0.25\text{mm}$
X.XX = $\pm 0.10\text{mm}$
X.XXX = $\pm 0.01\text{mm}$

ANGLES = $\pm 5^\circ$

UNLESS STATED

MATERIAL:

BRASS CW603N TO BS EN 12164
(CuZn36Pb3)

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

TERMINAL PIN

DRAWING NUMBER:

H2176-XX

SHT
2
OF
2