

5

4

3

2



1

D



C

B

A

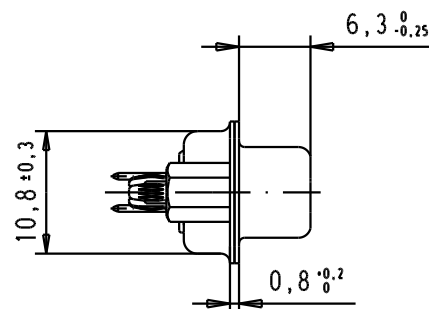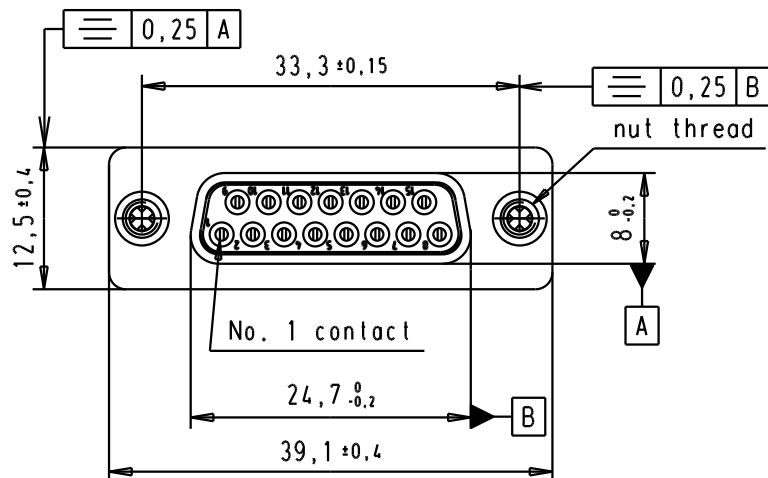

PCB Layout, component side,
PCB thickness 1,6 mm

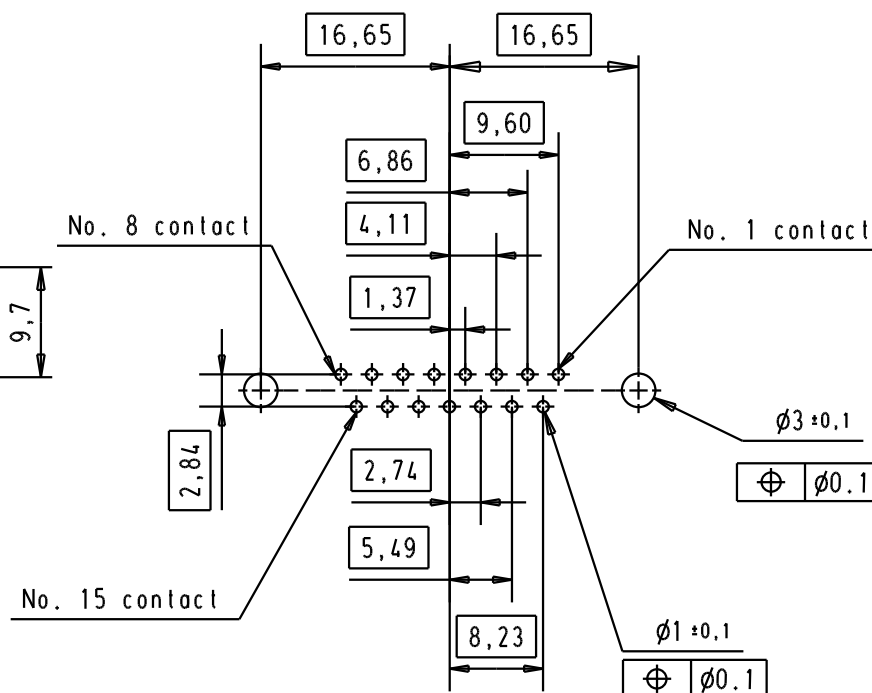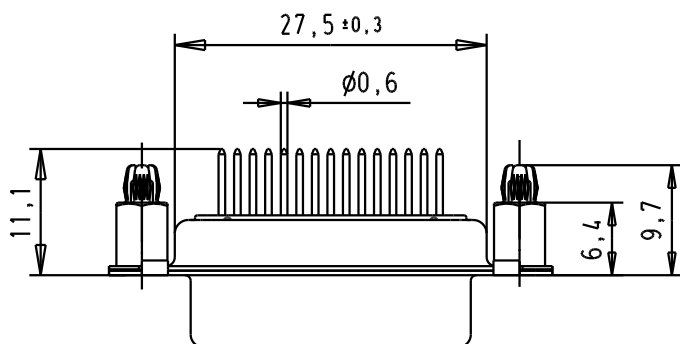


SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.		
Stand.		



D-Sub, female, straight,
15 Poles, solder pins,
tin plated shell with
spacer nuts and board-locks

Mo?Mstob/
Scale

1.5:1

09642127236

M3

33079

29/08/05

JMDR

09642127235

UNC 4-40

31058

8-JUL-02

CV

Part number

Nut thread

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris



TB 0964212723x

Sub.

Blatt/ Page

2
3