

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	N/A, N/A .
(C) COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION.	ALL RIGHTS RESERVED.	


LOC	DIST	REVISIONS					
DF	X0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REV PER 0G3D-0424-02	9-02	JMK	JL

COMPONENT	MATERIAL	FINISH
HOUSING — —	STAINLESS STEEL PER ASTM-A-484 OR ASTM-A-582 TYPE 303	PASSIVATED PER ASTM-A-380 —
— DIELECTRIC —	PTFE FLUORCARBON PER ASTM-D-1457 —	— — —
— CENTER CONTACT —	BERYLLIUM COPPER PER ASTM-B-196 OR 197 ALLOY C17300, CONDITION H	GOLD PLATED PER ASTM-B-488 —
CLAMP NUT — INNER SLEEVE	STAINLESS STEEL PER ASTM-A-484 OR ASTM-A-582 TYPE 303	PASSIVATED PER ASTM-A-380 —
— — —	— — —	— — —
— FERRULE —	COPPER OR BRASS ALLOY, ROCKWELL F65 MAX	GOLD PLATED PER ASTM-B-488 —
— — —	— — —	— — —
— — —	— — —	— — —


ENVIRONMENTAL
TEMPERATURE RATING: -65°C TO +165°C
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
SHOCK: MIL-STD-202, METHOD 213, CONDITION 1
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106
CORROSION: MIL-STD-202, METHOD 101, CONDITION B. 5% SALT SPRAY
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B EXCEPT HIGH TEMP 85°C

MECHANICAL		
INTERFACE DIMENSIONS: MIL-STD-348A FIG.	310.2	
RECOMMENDED MATING TORQUE: 7-10 IN-LBS		
FORCE TO ENGAGE & DISENGAGE (IN-LBS MAX:)	2.0	
WEIGHT (GRAMS): TBD		
MATING CHARACTERISTICS:	INSERTION (MAX LBS)	2
	WITHDRAWAL (MIN OZ):	1
CABLE RETENTION:	AXIAL FORCE (LBS)	20
	TORQUE (IN-OZ):	N/A
CENTER CONTACT CAPTIVATION:	AXIAL (LBS):	6.0
	RADIAL (IN-OZ):	N/A

ELECTRICAL	
NORMAL IMPEDANCE (OHMS):	50
FREQUENCY RANGE (GHz):	DC TO 12.4
VOLT RATING @ SEA LEVEL (VRMS MAX):	250
VSWR:	1.15+0.02f(GHz)
INSERTION LOSS: (dB MAX):	.06 $\sqrt{f(\text{GHz})}$
RF LEAKAGE (dB MIN):	-60 @ 2-3GHz
CORONA 70,000 FT (VRMS MIN):	190
DIELECTRIC WITHSTANDING VOLTAGE (VRMS MIN) AT SEA LEVEL:	750
I.R. (MEGOHMS MIN):	10,000
RF HIGH POTENTIAL AT SEA LEVEL (VRMS MIN @ 5 MHz):	500
CONTACT RESISTANCE (MILLIOHMS MAX):	
	CENTER CONTACT: 3.0
	OUTER CONTACT: 2.0
	CABLE TO HOUSING: 0.5

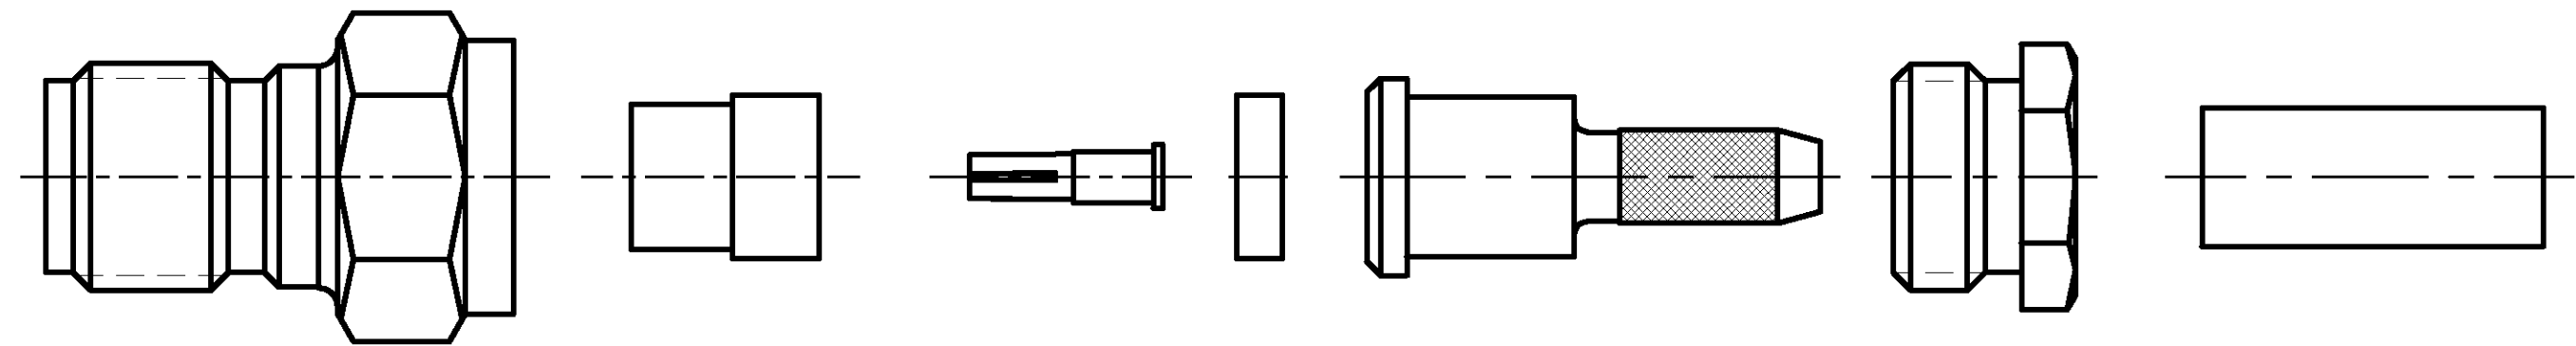

AS SHIPPED TO CUSTOMER

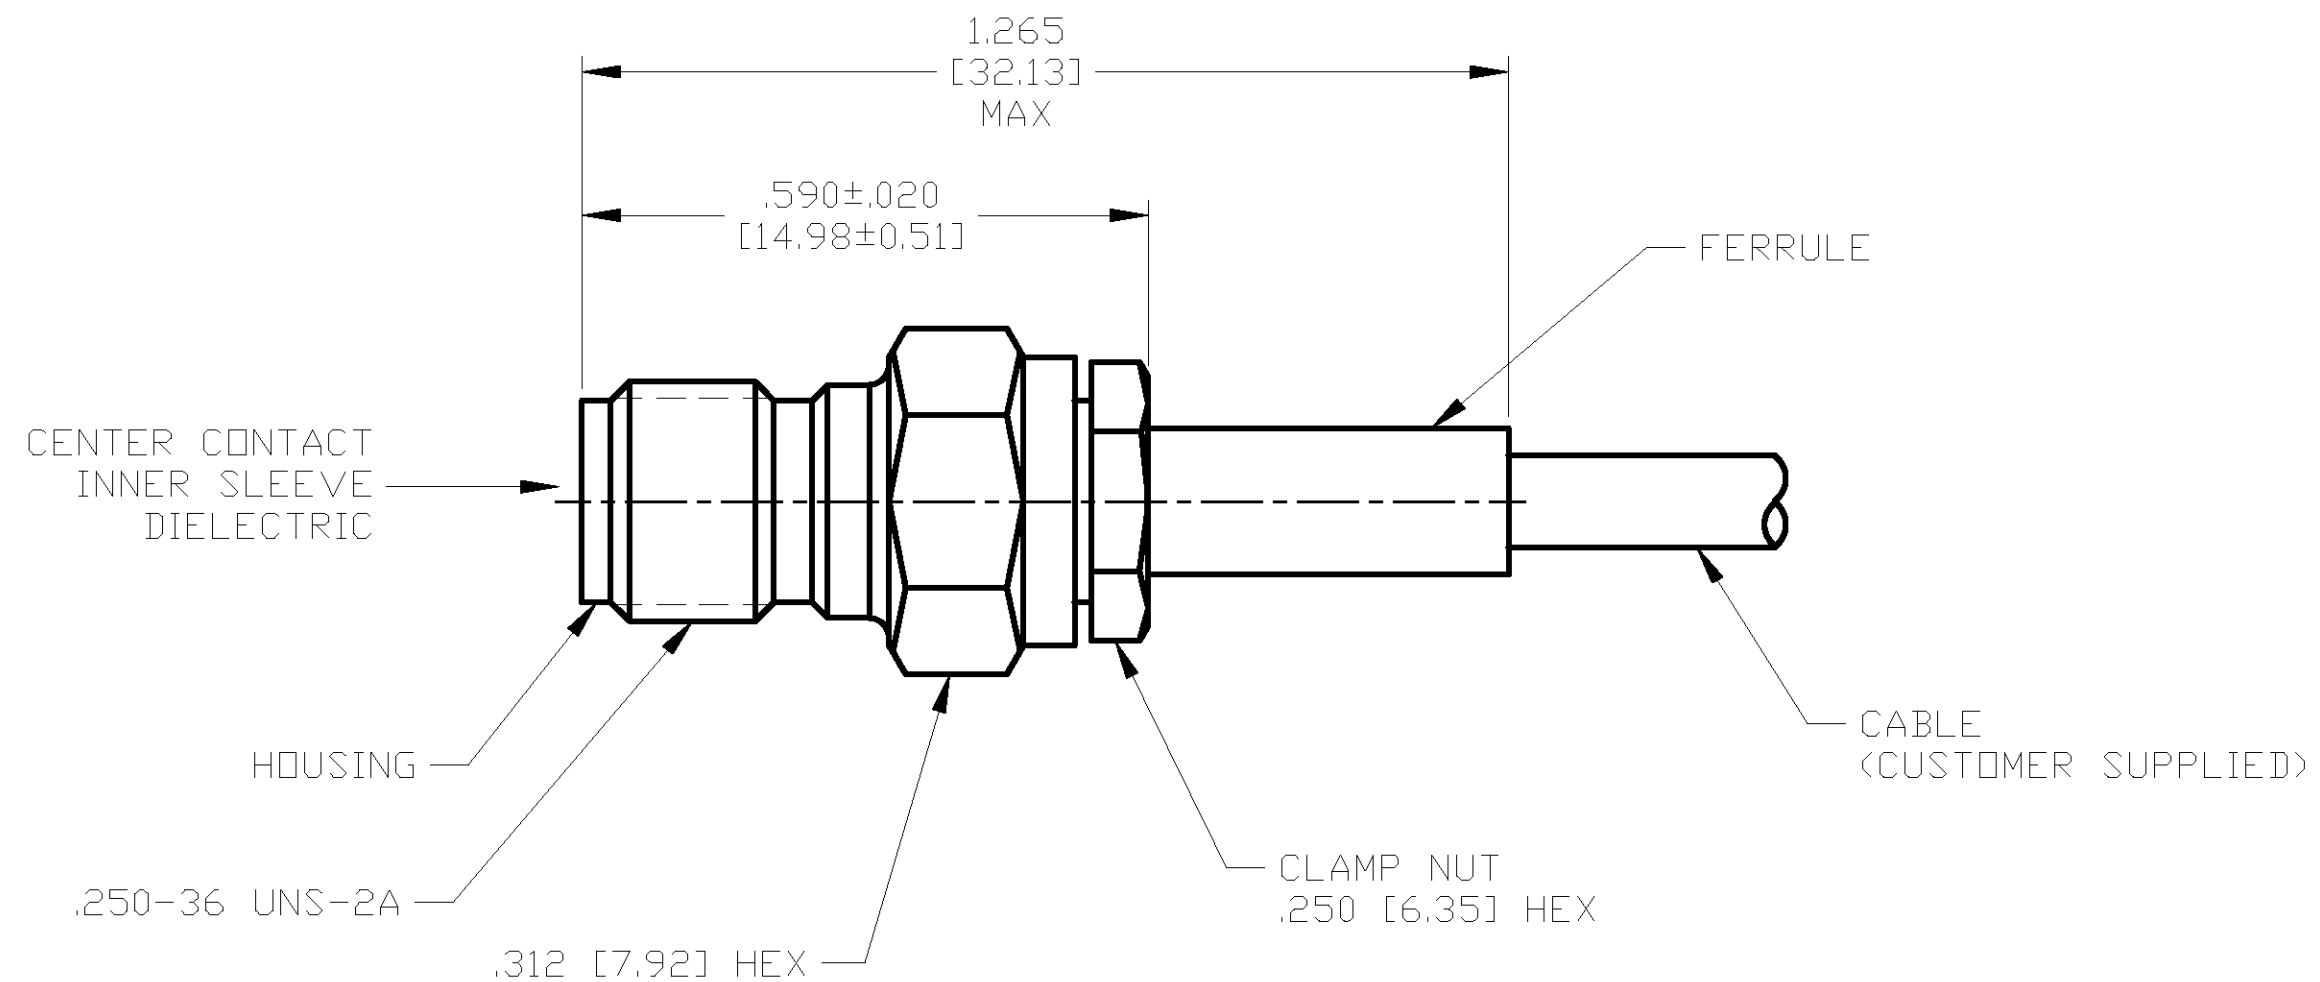

ASSEMBLED VIEW

DESIGNED TO USE RG-174/U OR EQUIVALENT	
CABLE ENTRY DIAMETER MIN	
HOUSING:	N/A
CONTACT:	N/A
DIELECTRIC:	.021 [0.53]
INNER SLEEVE:	.066 [1.68]
FERRULE:	.127 [3.23]

THIS DRAWING IS A CONTROLLED DOCUMENT																	
DIMENSIONS: INCHES [mm] 		TOLERANCES UNLESS OTHERWISE SPECIFIED: <table><tr><td>0 PLC</td><td>±</td><td>-</td></tr><tr><td>1 PLC</td><td>±</td><td>-</td></tr><tr><td>2 PLC</td><td>±</td><td>-</td></tr><tr><td>3 PLC</td><td>±</td><td>.005 [0.13]</td></tr><tr><td>4 PLC</td><td>±</td><td>-</td></tr></table> ANGLES ± -	0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	.005 [0.13]	4 PLC	±	-
0 PLC	±	-															
1 PLC	±	-															
2 PLC	±	-															
3 PLC	±	.005 [0.13]															
4 PLC	±	-															
MATERIAL	FINISH																
SEE TABLE	SEE TABLE																

DWN	9/10/02
J. KAISER	
CHK	10-8-02
J. LIPPERT	
APVD	10-8-02
J. LIPPERT	
PRODUCT SPEC	
—	
APPLICATION SPEC	
408-4888	
WEIGHT	TBD
CUSTOMER DRAWING	

		Tyco Electronics Corporation Harrisburg, PA 17105	
NAME			
SMA STRAIGHT CABLE JACK-CRIMP ATTACHMENT (M39012/57B3012) CAT B			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	 1051905	—
SCALE		SHEET	REV
5.1		1 OF 1	B