

NUMBER C-178022




三内装(3rd ANGLE PROJECTION)

<USERS>DEPT5270>E20996>U.250>U.6P>S.PLUG-I.L

PRINT DIST

REV.10/83

単位、mm DIMENSIONS IN MM. DO NOT SCALE PRINT

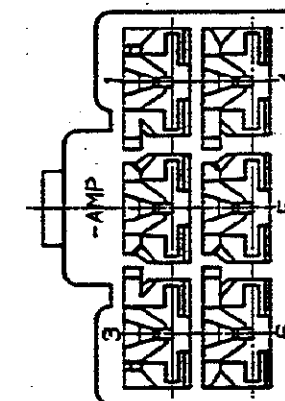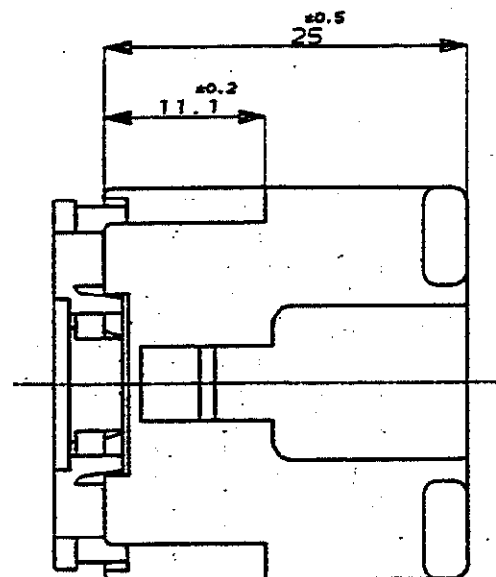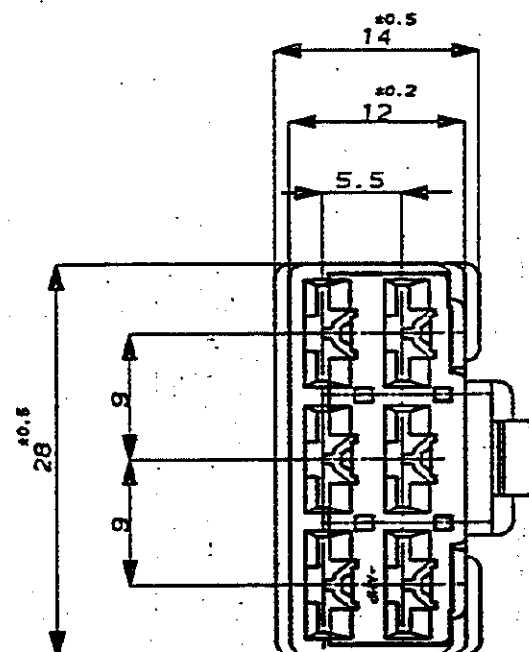


NOTE ;

1. THE MATING COUNTERPART P/N (178025,171897)
2. APPLIED CONTACT (170032,170258,170384)

△ DBL LOCK PLATE
MATERIAL ; PBT
COLOR ; YELLOW

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

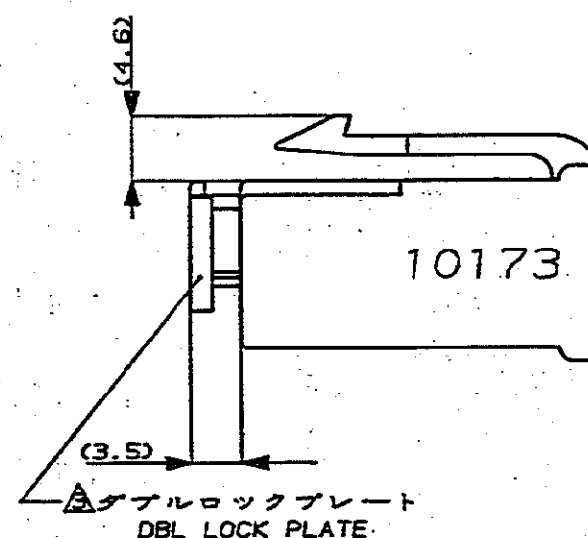

OBSOLETE	6-178022-6	淡灰 (LIGHT GRAY)
△ OBSOLETE	178022-8	オレンジ (ORANGE)
	178022-7	黄 (YELLOW)
OBSOLETE	178022-6	灰 (GRAY)
	178022-5	青 (BLUE)
△ OBSOLETE	178022-4	緑 (GREEN)
	178022-2	黒 (BLACK)
	178022-1	自然色 (NATURAL)
番号 (P/N)		色 (COLOR)

TE TE Connectivity

適合電線断面径 (WIRE RANGE)	被覆外径 (INSULATION DIA.)	名称 (NAME)	.250 シリーズ ダブルロック コネクタ 6Pos プラグハウジング (インターロック タイプ) .250 SERIES DOUBLE LOCK CONNECTOR 6Pos. PLUG HOUSING (INTER LOCK TYPE)		
材料 (MATERIAL) 6/6 ナイロン (5/5 NYLON)	色 (COLOR) 表参照 SEE TABLE	一般公差 (GENERAL TOLERANCE)	SIZE A3	LOC J	番号 (No.) C-178022
DR. T. Sagawa 2/12/91	DE. T. Sagawa 2/12/91	100μm ±0.2 100μm ±0.25 300μm ±0.3 最大 ±3°	尺度 (SCALE) 2-1	REV. A	SHEET 1 OF 1
CHK.	APP.				

(CUSTOMER DRAWING) 参考 図面