


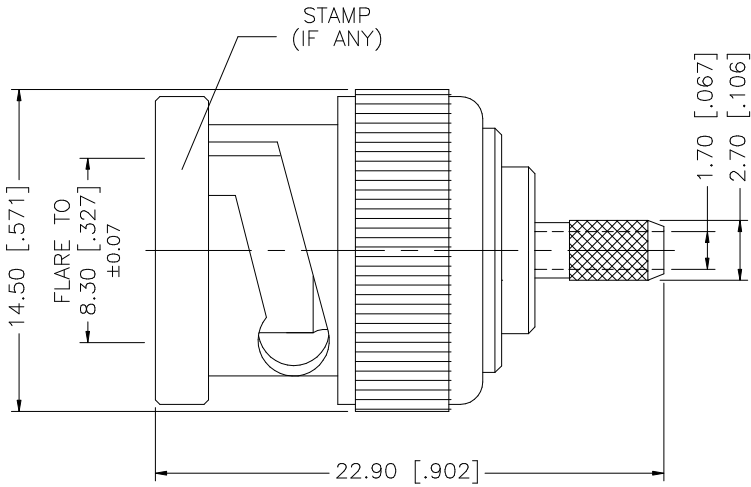


REV.	DATE	DESCRIPTION
NC	10/24/06	INITIAL RELEASE

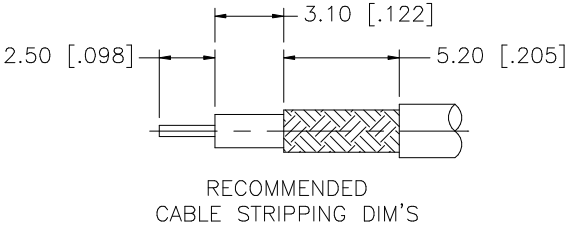

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.					10/24/06	
6						CHECKED			PART DESCRIPTION BNC CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U)				
5						ISSUED							
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1		PART NO. 112136				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1									
2	INSULATOR	DELIRIN	NATURAL	1				DWG. NO. 112136.DWG					
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY				REV.	NC	SIZE	A	SCALE	NA