



BAV199WT

Dual Series Switching Diode

Features

- Low Current Leakage
- Forward Current: $I_F=160\text{mA}$.
- Small Outline Surface Mount Package
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking: K52
- Lead Free Finish/Rohs Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF"


Maximum Ratings @ 25°C Unless Otherwise Specified

Parameter	Symbol	Value
Peak Repetitive Reverse Voltage	V_{RRM}	85V
Working Peak Reverse Voltage	V_{RWM}	85V
RMS Reverse Voltage	$V_{R(RMS)}$	60V
Average Rectified Output Current	I_O	160mA
Non-Repetitive Peak Forward Surge Current	I_{FSM}	4A @1us 1A @1ms 0.5A @1s
Power Dissipation	P_{TOT}	200mW
Thermal Resistance Junction to Ambient	R_{thJA}	625°C/W
Operating Temperature	T_J	-55°C to +150°C
Storage Temperature	T_{stg}	-55°C to +150°C

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Typ	Max	Unit
V_{BR}	Reverse Breakdown Voltage ($I_R=100\mu A$)	85	---	---	V
V_F	Forward Voltage $I_F=1.0\text{mA}$ $I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=150\text{mA}$	---	---	0.90 1.00 1.10 1.25	V
I_R	Leakage Current ($V_R=75\text{V}$)	---	---	5.0	nA
C_j	Junction Capacitance ($V_R=0$, $f=1.0\text{MHz}$)	---	2.0	---	pF
t_{rr}	Reverse recovery time	---	---	3.0	μs

SOT-323

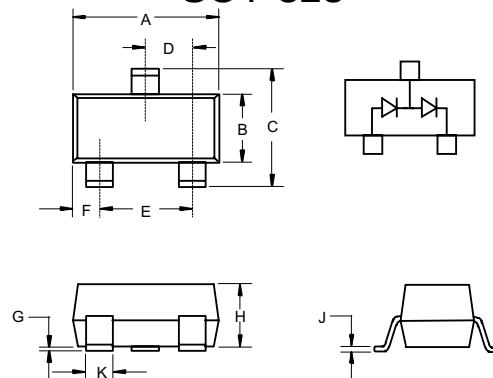


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

Suggested Solder Pad Layout




Typical Characteristics


Forward Characteristics

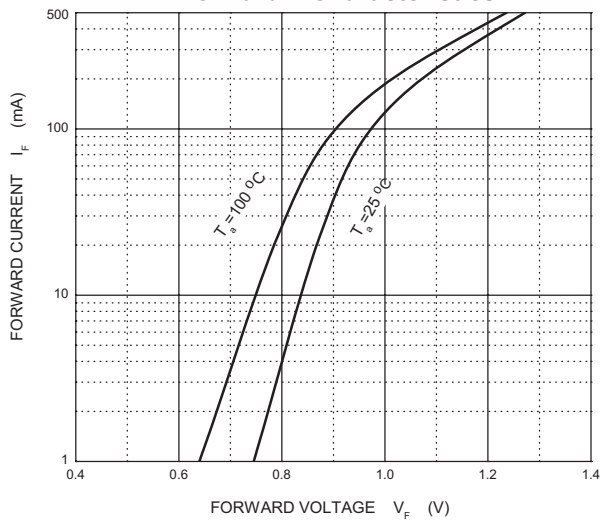


Reverse Characteristics

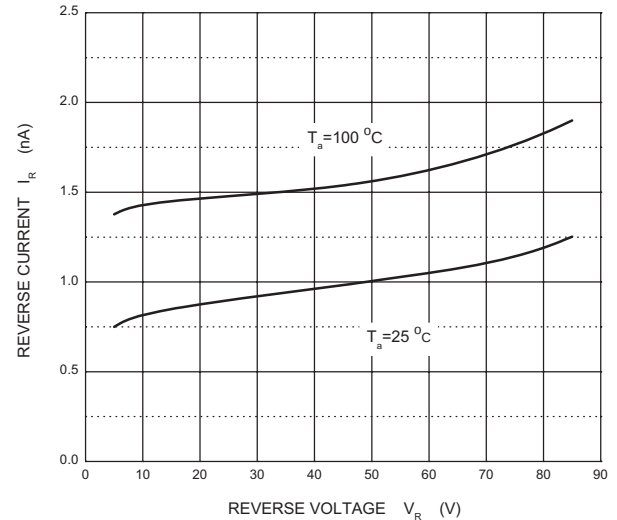

Capacitance Characteristics

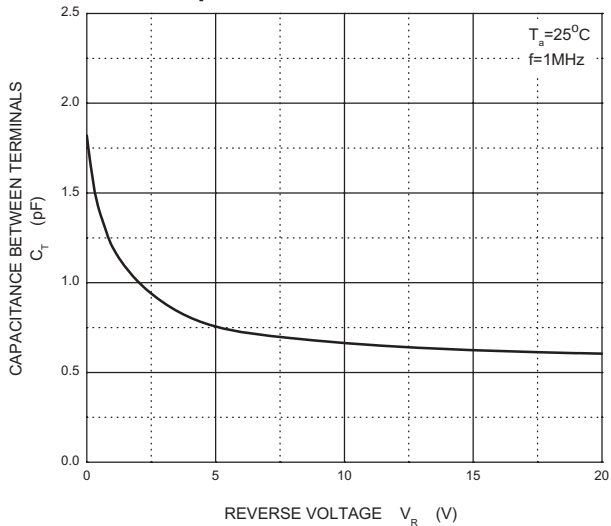

Power Derating Curve

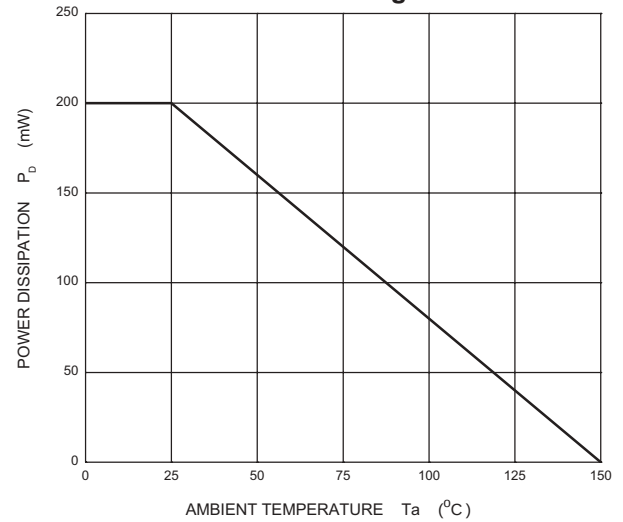

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.