



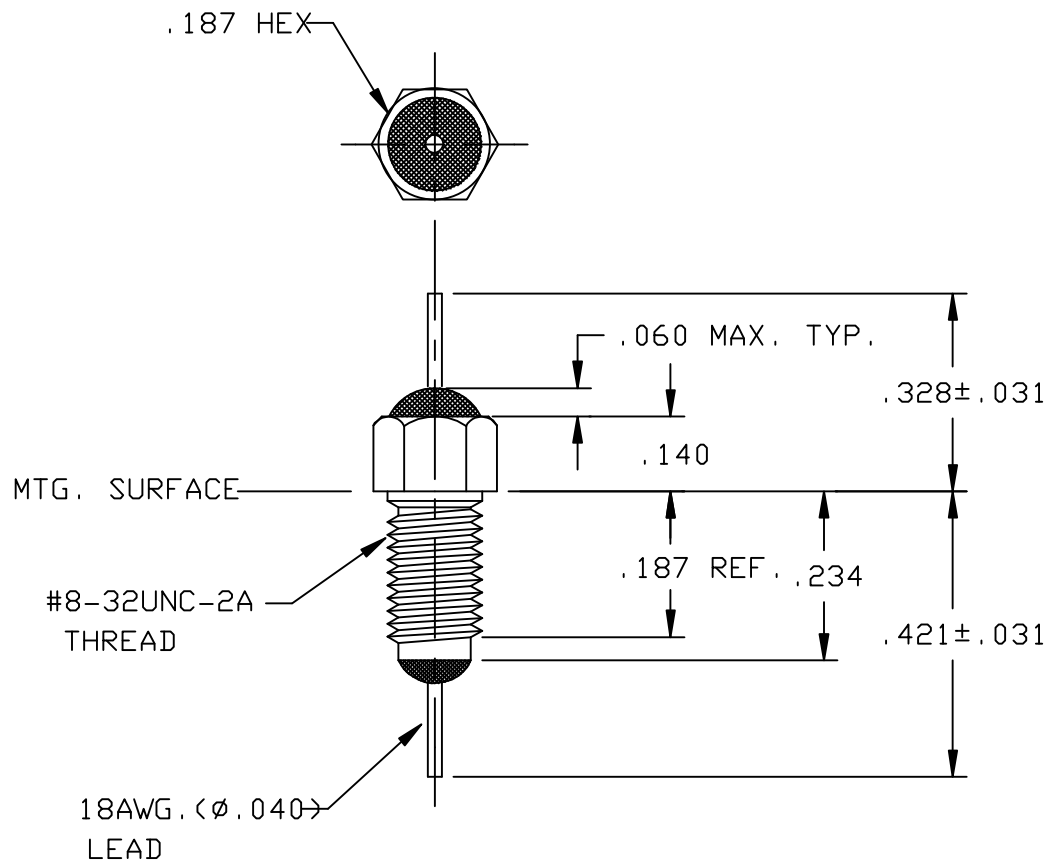

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	0.027 ^{+80%} / _{-20%}
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 150 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHZ	I.L. (db)
1 MHZ	8
100 MHZ	45
1 GHz	--

SCHEMATIC



MARKING:

PART: SCI-785-014

BAG: 54-785-014

DATE CODE

QTY./BAG (200 MAX.)

NOTES:

1. SUGGESTED MOUNTING HOLE = Ø.170
2. HARDWARE IS INCLUDED.

CN 182610 25

REDRAWN

REV. 1
CHANGE NOTICE NO.

TOLERANCES UNLESS
OTHERWISE SPECIFIED

Fraction 1/64

Dec. .xx±

Dec. .xxx±0.10

Angles ±0° 30'

CODE IDENT. NO.

DLSP2



SPECTRUM CONTROL INC.

ERIE, FAIRVIEW
PENNSYLVANIA

Drawn MAYNARD

Ckd 4/2/98

Apvd.

Scale NONE

Description FEED THRU
RESIN SEAL FILTER

54-785-014