

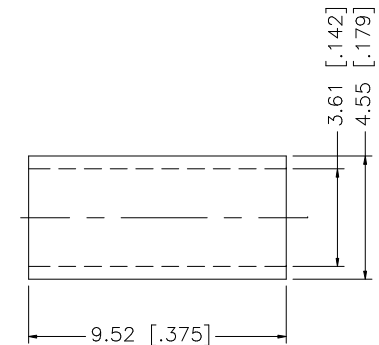
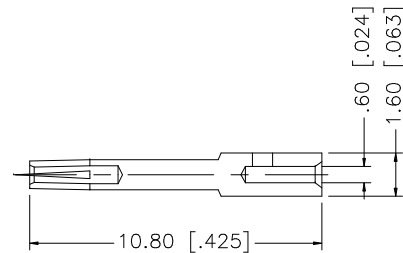
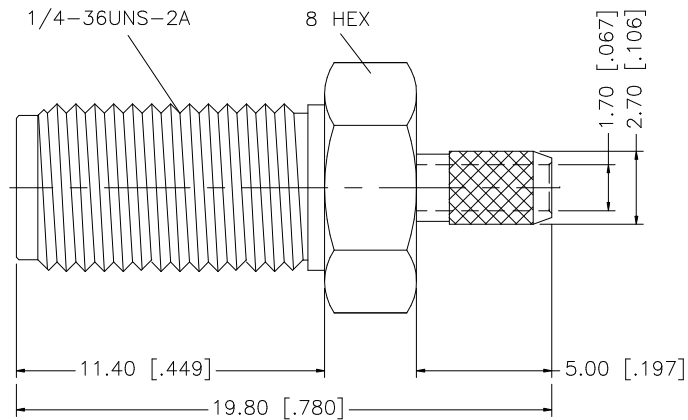


REV.	DATE	DESCRIPTION
A-1	01/25/04	UPDATE DRAWING FORMAT

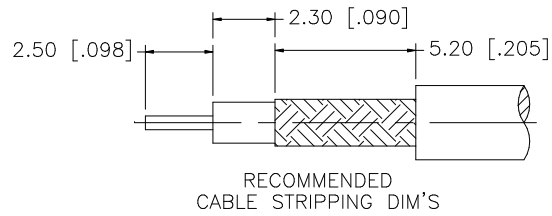

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 3.2mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.							01/25/04	
7						CHECKED									
6						ISSUED			PART DESCRIPTION SMA STRAIGHT CRIMP JACK (FOR RG-316/U DOUBLE BRAID CABLE)						
5	HEAT SHRINK TUBING		BLACK	1		SHEET	1 OF 1								
4	FERRULE	COPPER	GOLD	1					PART NO. 132198						
3	CONTACT PIN	BER. COPPER	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1				DWG. NO. 132198.DWG							
	DESCRIPTION	MATERIAL	FINISH	QTY											
								CAD FILE	C:/132/132198.DWG	REV.	A-1	SIZE	A	SCALE	NA