



**ALL NEW
PRODUCT!**


Heyco®-Tite Brass Lazy Bend Liquid Tight Cordgrips

Stainless Steel Nozzle - Metric Hubs

The Ultimate in Liquid Tight Strain Relief Protection

- Stainless Steel Nozzle eases the cable into a lazy bend: prevents sharp bending and assures longest cable and product life.
- Adds reliability and safety to your application.
- Protects the lifeline of your electric/electronic products by absorbing the forces of pull, push, twist and flex.
- Securely anchors, insulates and protects cables at panel entry points.
- Nickel-plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- DFARS Compliant

CABLE DIAMETER RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum	Maximum	in.	mm.			A Clearance Hole Dia.	B Max. O.A. Length	C Thread Length	D Wrenching Flat Size	E Lazy Bend Nozzle Length	in.	mm.	
.098	2,5	.118	3,0	14700	M8 x 1.25	.315	8,0	2.13	54,0	.20	5,0	.43	11,0
.138	3,5	.157	4,0	14701									1.93
.118	3,0	.157	4,0	14702									49,0
.157	4,0	.236	6,0	14703	M10 x 1.5	.394	10,0	2.24	57,0	.20	5,0	.51	13,0
.138	3,5	.197	5,0	14704									2.05
.197	5,0	.256	6,5	14705	M12 x 1.5	.472	12,0	2.44	62,0	.20	5,0	.59	15,0
.256	6,5	.295	7,5	14706									2.24
.177	4,5	.236	6,0	14707									57,0
.236	6,0	.315	8,0	14708	M16 x 1.5	.630	16,0	2.80	71,0	.20	5,0	.71	18,0
.315	8,0	.413	10,5	14709									2.60
.236	6,0	.315	8,0	14710									66,0
.315	8,0	.433	11,0	14711	M20 x 1.5	.787	20,0	3.62	92,0	.24	6,0	.94	24,0
.433	11,0	.571	14,5	14712									3.39
.374	9,5	.492	12,5	14713									86,0
.492	12,5	.630	16,0	14714	M25 x 1.5	.984	25,0	4.17	106,0	.28	7,0	1.18	30,0
.630	16,0	.748	19,0	14715									3.90
.669	17,0	.827	21,0	14716	M32 x 1.5	1.260	32,0	4.61	117,0	.31	8,0	1.42	36,0
.827	21,0	.965	24,5	14717									4.29
													109,0

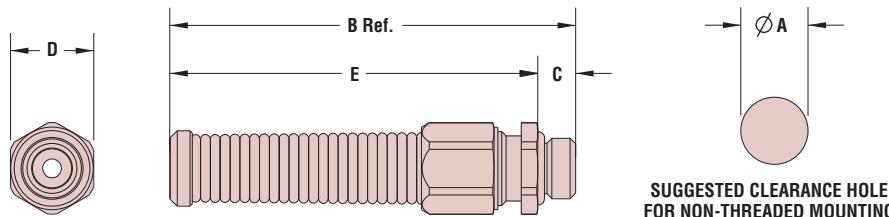

**SUGGESTED CLEARANCE HOLE
FOR NON-THREADED MOUNTING**

**Quick
Specs**

Material	Nickel-Plated Brass with Stainless Steel Nozzle w/TPE Sealing Gland and NBR O-Ring
Temperature Range	-40°F (-40°C) to 212°F (100°C)
IP Rating	IP 68, IP 69K