


Ultra-R2 Dissipative Rubber Table Mat

Meets ANSI/ESD S20.20 worksurface required limit (and recommendation of ANSI/ESD S4.1) tested per ANSI/ESD S4.1 and ESD TR53. Resistance to solvents, hot solder and soldering irons makes the Ultra-R2 Dissipative Rubber Table Mat a versatile static-safe worksurface. Electrical performance is accomplished by using a two-layer combination of top color static dissipative and bottom black conductive rubber materials. Compatible with Constant Monitors. Available in rolls, mats and mats with ground cord.

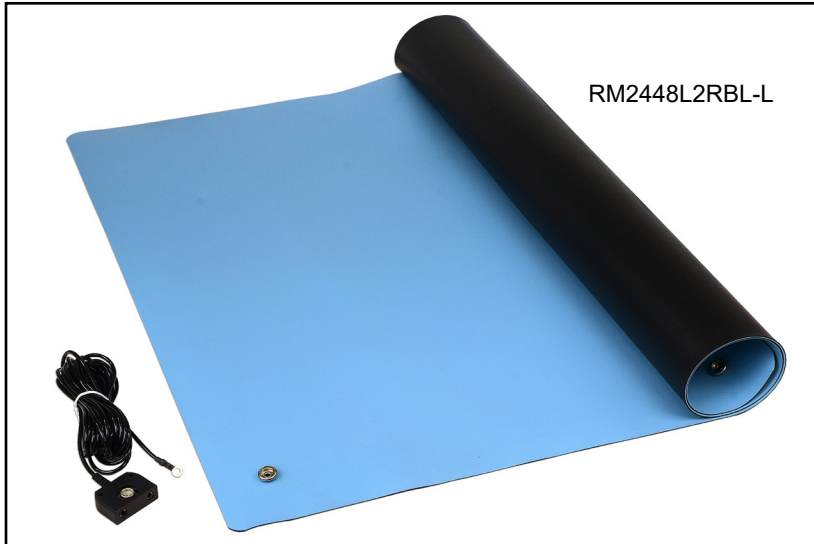

Properties	Typical Value	Test Method
Thickness*	0.064" (1.6 mm)	
Color*	Blue	
Resistance		
Surface to Ground (Rtg)	1 x 10 ⁶ to < 1 x 10 ⁹ ohms	ANSI/ESD S4.1
Surface to Surface (Rtt)	1 x 10 ⁶ to < 1 x 10 ⁹ ohms	ANSI/ESD S4.1
Tolerance	Width +/- 0.250" Length +/- 0.250"	

*Color, texture and thickness may vary between lots and mills.

Specifications and procedures subject to change without notice.

Mat Item Numbers

Size	Blue
*24" x 48" (0.6 m x 1.2 m)	RM2448L2RBL

Mat Includes:

- 1 Table Mat, size as specified
- 2 Female 3/8" Snaps (Snaps installed on long side of mat)

*Includes 1/2" radius corners

Table Mat Kit Item Numbers

Size	Blue
*24" x 48" (0.6 m x 1.2 m)	RM2448L2RBL-L

Table Mat Kit Includes:

- 1 Table Mat, size as specified
- 1 [LPCGC151M](#) 15' (4.6 m) Ground Cord
- 2 Female 3/8" Snaps (Snaps installed on long side of mat)

*Includes 1/2" radius corners

Roll Item Numbers

Size	Blue
2' x 50' (0.6 m x 15.2 m)	RM24600L2RBL
2.5' x 50' (0.8 m x 15.2 m)	RM30600L2RBL
3' x 50' (0.9 m x 15.2 m)	RM36600L2RBL
4' x 50' (1.2 m x 15.2 m)	RM48600L2RBL

Includes roll of matting material.



Made in the
United States of America

ULTRA-R2 DISSIPATIVE RUBBER TABLE MAT

926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: StaticControl.com
PHONE (919) 718-0000

**DRAWING
NUMBER**
Ultra-R2 Series

DATE
May
2017

SCS