


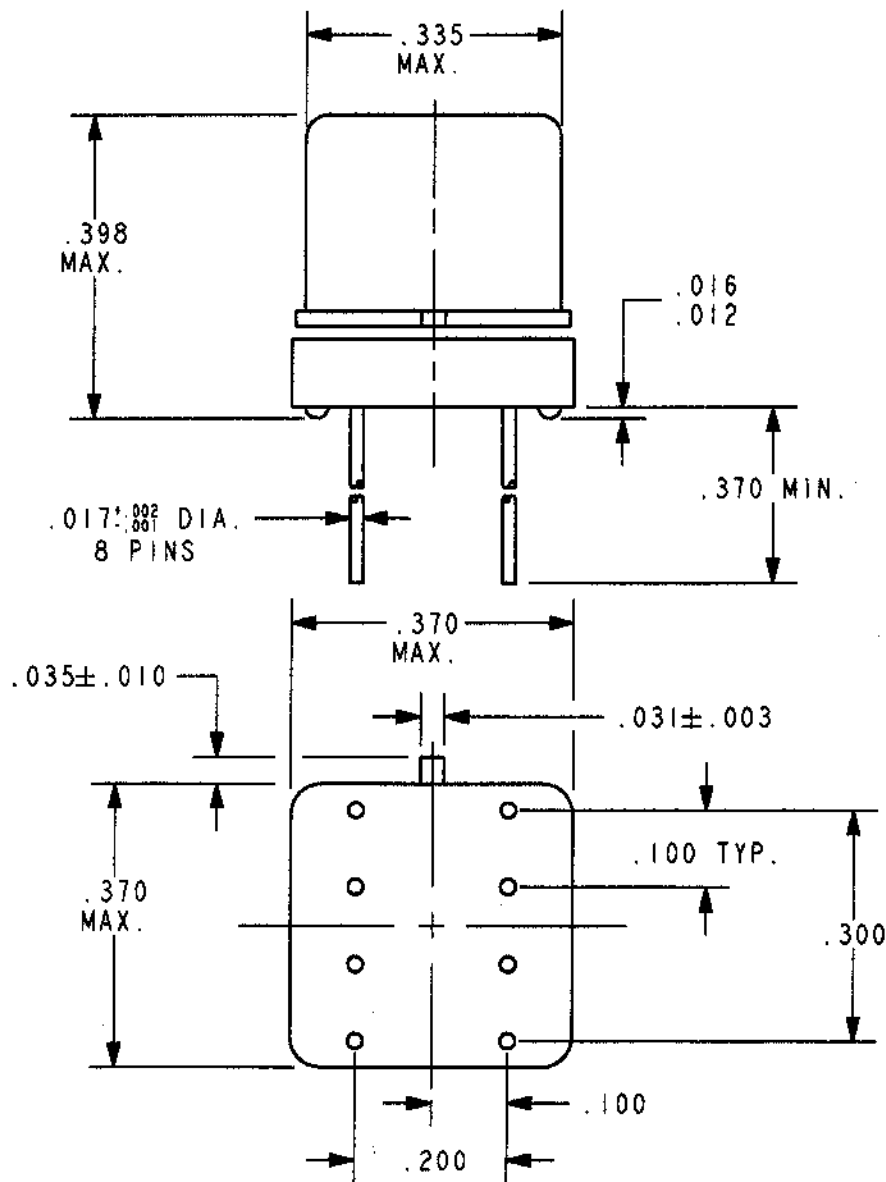


REV. 2
DCO 143371

COIL: @ 25°C
RESISTANCE 1560 OHMS ±10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 14.2 VDC
MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:
VIBRATION 10 CPS TO 3000 CPS @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C
NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 11/30/01 *ERD* 12/19/01

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M39016/9-076L REV.

"JMAC" RELAY

JMAC-26XLS