



AS01708MR-SC-2-R 17mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview


- 17mm diameter speaker with Neodymium magnet for 88 dB sensitivity
- 0.3W continuous, 0.5 maximum power handling and 8Ω impedance
- Mylar diaphragm for moisture resistance and spring contacts for quick connection
- Less than 5 mm thick for space-limited applications

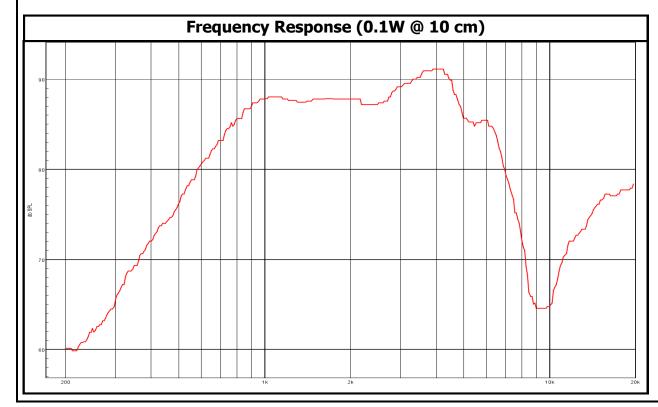

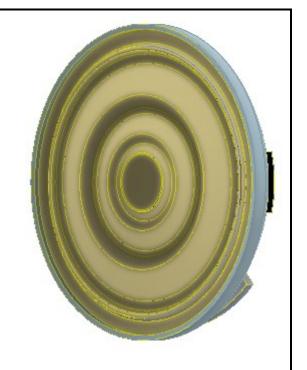





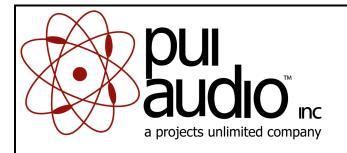

AS01708MR-SC-2-R 17mm Speaker

Mechanical and Environment Testing		
Test Description	Test Condition	
High Temperature	60°C with random humidity for 96 hours	
Low Temperature	-30°C with random humidity for 1 hours	
Humidity	40°C with 90% relative humidity for 96 hours	
Vibration 1.5 mm movement modulated at 10 to 55 F 2 hours		
Drop Test	1m free fall onto 20 mm thick board, 5 cycles	
Temperature Cycle Test	-30°C to 60°C, 5 cycles	
After tests, speaker shall rest for 1 hours. SPL shall not deviate ±3 dB from pre-test measurement.		

Frequency Response Measurement Setup Standard test condition of speaker Power Amplifier Microphone 0 [] 0 B&K Type 4191 Speaker [Standard Baffle Board Recommended 00

In IEC 268-5 Where 1650mmx1350mm

φ00

Audio Analyzer B&K Type 2012

SPECIFICATIONS				
PARAMETERS	VALUES	UNITS		
RATED INPUT POWER	0.3	W		
MAX INPUT POWER	0.5	W		
IMPEDANCE	8 ± 15%	OHM		
OUTPUT SPL @ 0.1W/0.1M	88 ± 3	dBA		
(AT 0.8, 1.0, 1.2, 1.5, kHz) DISTORTION (MAX.)	F0/			
DISTORTION (MAX.)	5%	-		
RESONANT FREQUENCY	750 ± 20%	Hz		
FREQUENCY RANGE	750 ~ 5000	Hz		
HOUSING MATERIAL	METAL	-		
CONE MATERIAL	MYLAR	-		
MAGNET MATERIAL	Nd-Fe-B	-		
OPERATING TEMPERATURE	-20 ~ +50	°C		
WEIGHT	1.6	grams		


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

LTR


©2003, Projects Unlimited In	©2003,	Projects	Unlimited	Ind
------------------------------	--------	----------	-----------	-----

	REVISION HISTORY	<u>, </u>		
DE	SCRIPTION		DATE	APPROVED
DELEVEED	EDOM ENGINEEDING		5/16/2013	

5.5 ± 0.2 FREE POSITION

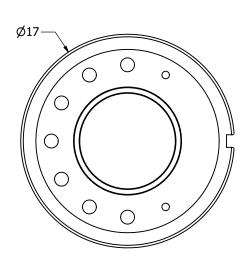

5.5±0.1 FREE PO 1.8±0.1 WORKING POSITION

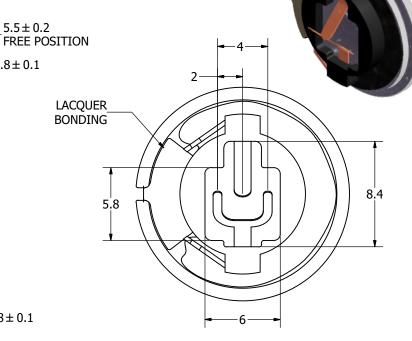

Checked by

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE		Designed by
SPECIFIED: DIMENSIONS ARE IN	SIZE	J.D.
MILLIMETERS,		\sim
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3	TO S
AS01708MR-	SC-2-R.idw	400

J.D.	5/16/2013	
	PUI audic a projects unlimited co	IIIC

Date

AS01708MR-SC-2-R

Approved by

Date

Speaker Edition Sheet - 1/1

Date

Drawn Date