


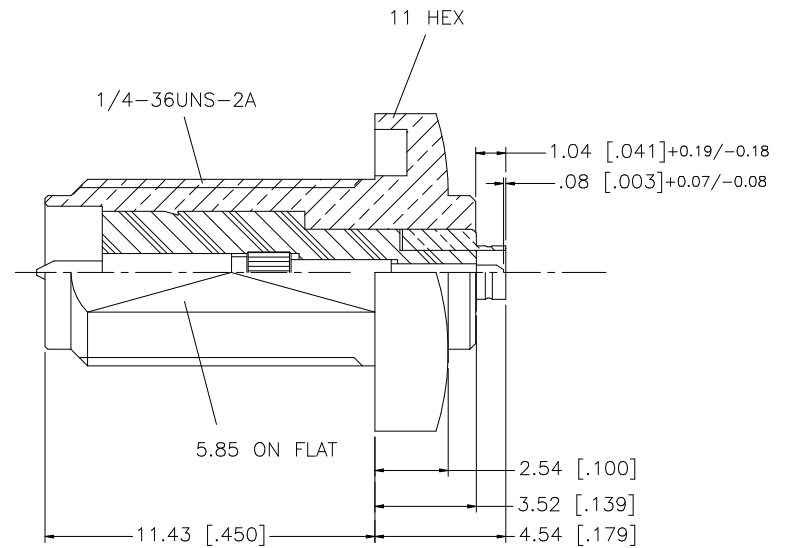


REV.	DATE	DESCRIPTION
NC	05/28/07	INITIAL RELEASE

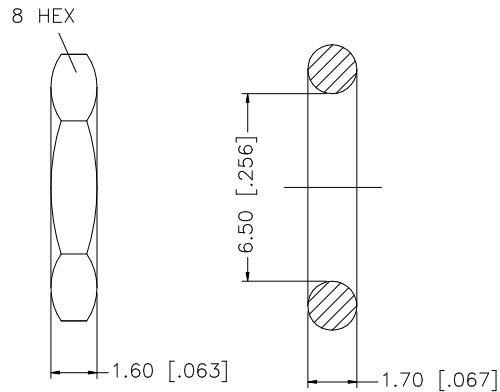

RECOMMENDED
MOUNTING HOLE

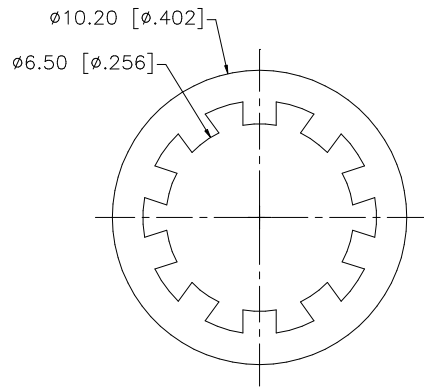

NOTE:
1. MAX. PANEL THICKNESS = 3.8mm

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	05/28/07						
6	HEX NUT	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMA REVERSE POLARITY JACK BULKHEAD TO U.FL PLUG ADAPTER					
5	LOCK WASHER	BRASS	GOLD	1		ISSUED								
4	GASKET	SILICONE	RED	1		SHEET	1 OF 1			PART NO. 242201RP				
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 242201RP.DWG					
1	BODY	BRASS	GOLD	1										REV. NC
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE C:/242/242201RP.DWG						