

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 6T
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOYS
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 3 AS PER CECC 75 301-802
PITCH: 1.27MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 125°C
COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL
CURRENT RATING: 1A MAX
WORKING VOLTAGE: 50V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX


STANDARD
CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
BAG

DIMENSION
A = 1.27 x (NB. PIN / 2 - 1)
B = 1.27 x (NB. PIN / 2)

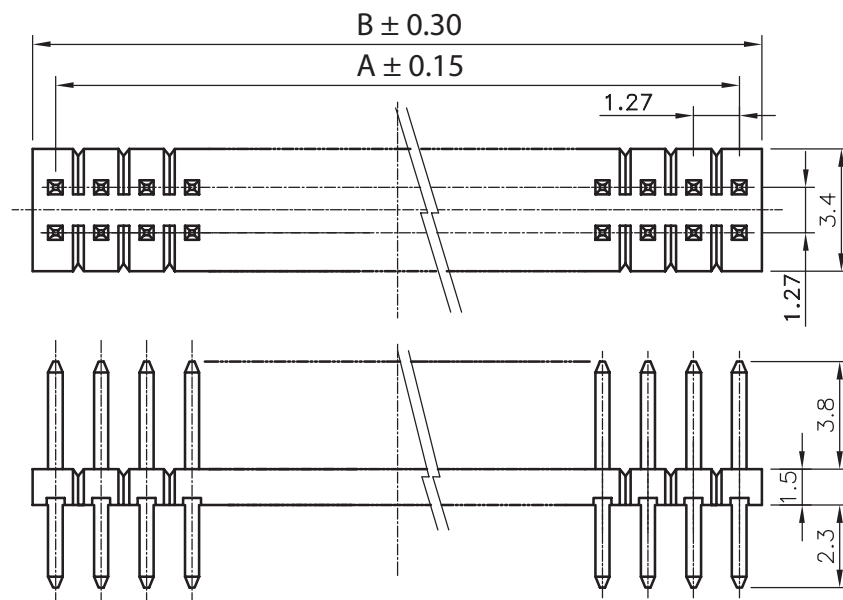

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 DESCRIPTION: 1.27MM DUAL PIN HEADER WERI PART NO: 622 0xx 211 21		SIZE
G	19-FEB-14	SOLDERING	QL					
F	26-JUL-13	DIM A & B	QL					
E	24-OCT-11	SOLDERING	GG					
D	25-NOV-09	STANDARD	JP					
C	23-NOV-07	MODIFICATIONS	EC	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 1.27MM DUAL PIN HEADER		SIZE
B	18-DEC-06	DRAW	EC		SCALE:			
A	08-JAN-02	PDF	JP		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW: PEARL			