

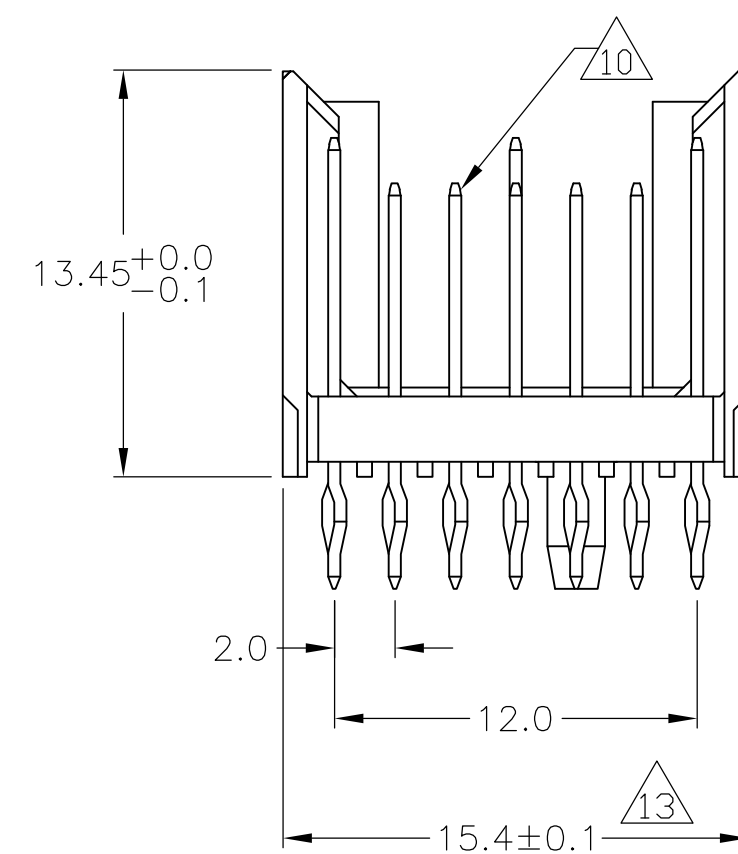


CONNECTOR ASSEMBLY
EXEMPLARY LOADED

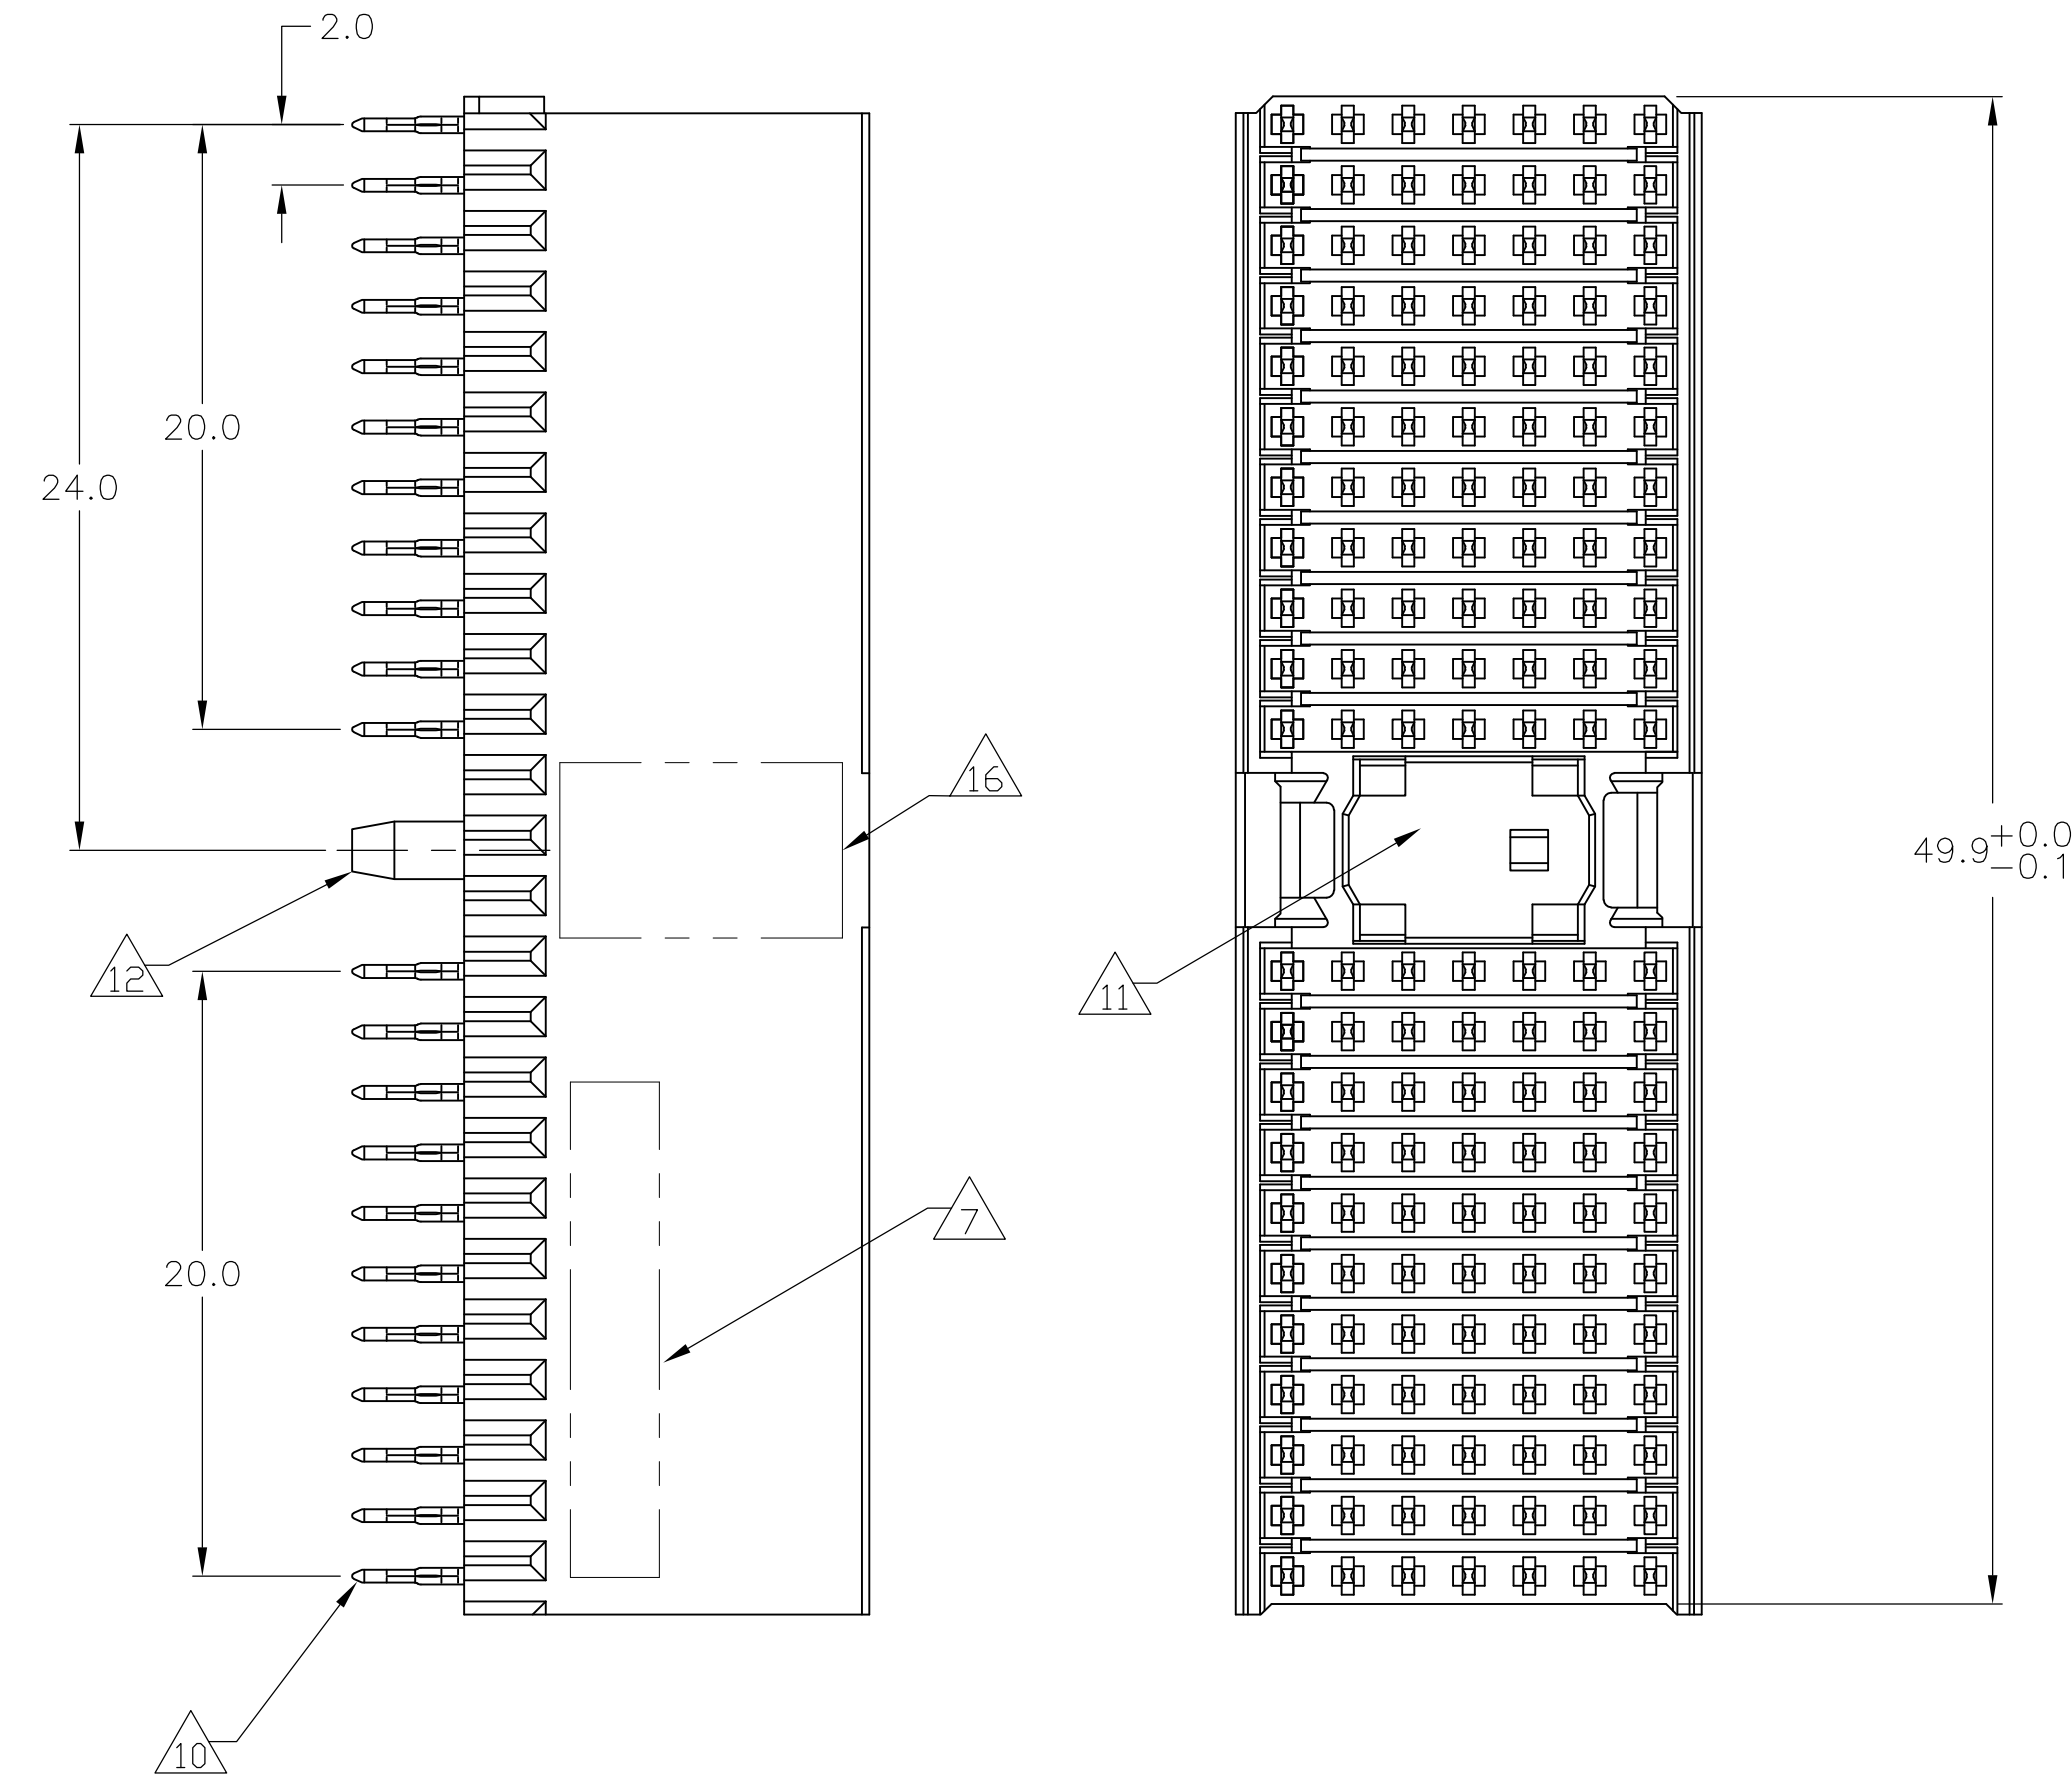

CONTACT DIMENSIONS

SCALE 5:1

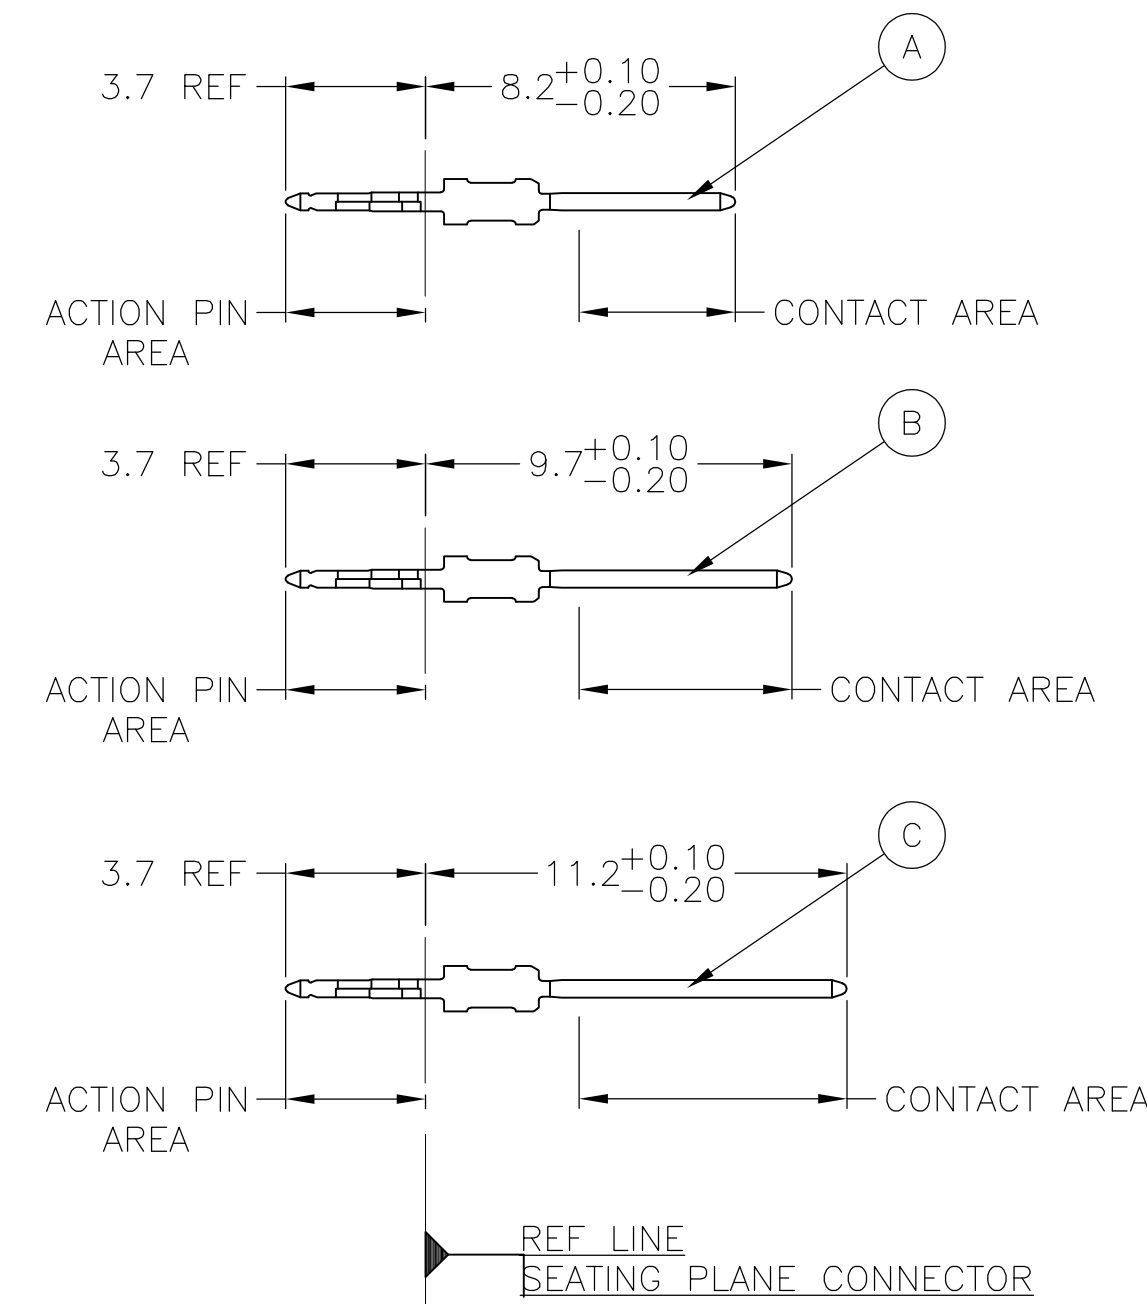


CONTACT LAYOUT





	z	a	b	c	d	e	f
1	C	B	B	B	B	B	C
2	C	B	B	B	B	B	C
3	C	B	B	B	B	B	C
4	C	B	B	B	B	B	C
5	C	B	B	B	B	B	C
6	C	B	B	B	B	B	C
7	C	B	B	B	B	B	C
8	C	B	B	B	B	B	C
9	C	B	B	B	B	B	C
10	C	B	B	C	B	B	C
11	C	B	B	B	A	B	C
MULTI PURPOSE CENTER							
15	C	B	B	B	B	B	C
16	C	B	B	B	B	B	C
17	C	B	B	B	B	B	C
18	C	B	B	B	B	B	C
19	C	B	B	B	B	B	C
20	C	B	B	B	B	B	C
21	C	B	B	B	B	B	C
22	C	B	B	B	B	B	C
23	C	B	B	B	B	B	C
24	C	B	B	B	B	B	C
25	C	B	B	B	B	B	C

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

PLATED THRU HOLES PARAMETERS

REFERENCE APPLICATION SPECIFICATION

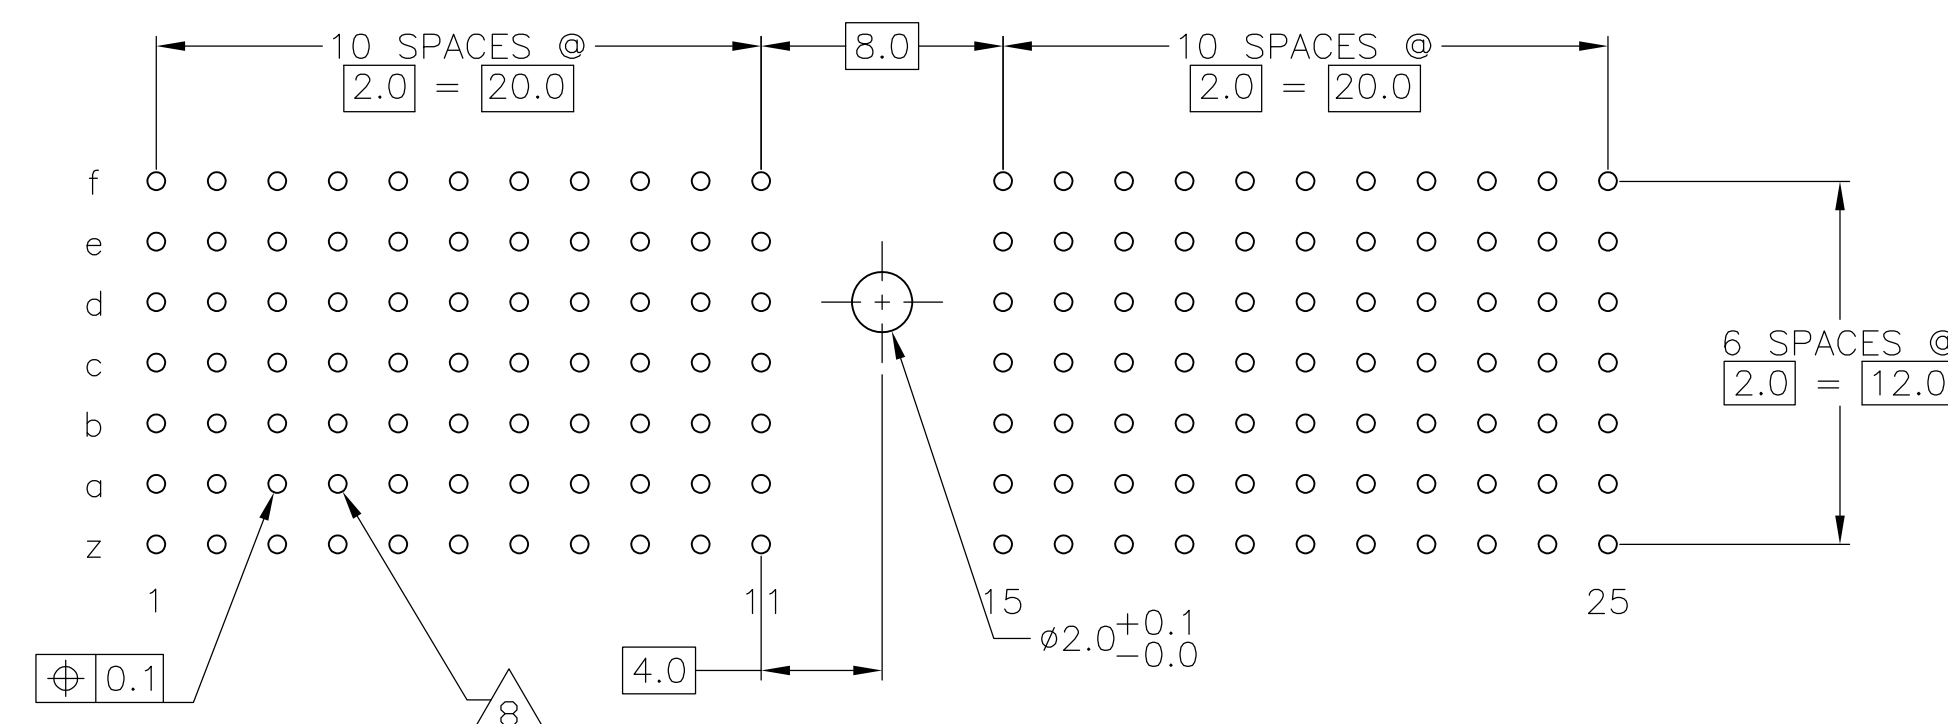

		3-188834-0
		1-188834-9
OBSOLETE		—188834-9—
		188834-4
		188834-1
	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.CARBO	130EC05	 TE Connectivity	
DIMENSIONS:		QIR G.SKIPPER	130EC05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.SKIPPER	130EC05	NAME	
mm	0- PLO $\pm$ — 1- PLO $\pm$ 0.1 2- PLO $\pm$ — 3- PLO $\pm$ — 4- PLO $\pm$ — ANGLES $\pm$ —	PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029		MALE ASSEMBLY, Z-PACK 2mm HM, TYPE A	
MATERIAL	FINISH	WEIGHT	—	SIZE	CAGE CODE / DRAWING NO
1	SEE TABLE	A1		00779	 188834
CUSTOMER DRAWING		SCALE		4:1	SHEET 1 of 2
					REV F

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED.

LOC

DIST

AD

00

REV

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

—

—

—

1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.

2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN\LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.

5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.

6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.

7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.

8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.

9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".

10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".

11

AREA RESERVED FOR KEYING PART (BASIC P/N 100525)

12

POLARIZATION FEATURE.

13

TO BE MEASURED AT BOTTOM OF SHROUD.

14

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

15

0.76µm MIN GOLD PLATING MATING SURFACES.

16

VOID CORING PERMISSIBLE IN THIS AREA

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

B CARBO

13DEC05

CHK

G SKIPPER

13DEC05

APVD

G SKIPPER

13DEC05

DIMENSIONS:

mm

0-PLC

1-PLC

2-PLC

3-PLC

4-PLC

ANGLES

±

± 0.1

±

±

±

±

±0.2

MATERIAL

SEE SHEET 1

FINISH

SEE SHEET 1

WEIGHT

—

CUSTOMER DRAWING

NAME

MALE ASSEMBLY, Z-PACK 2mm HM,
TYPE A

SIZE

A1

CAGE CODE

00779

DRAWING NO

188834

RESTRICTED TO

—

SCALE

4:1

SHEET

2

OF

2

REV

F

4805 (3/11)