


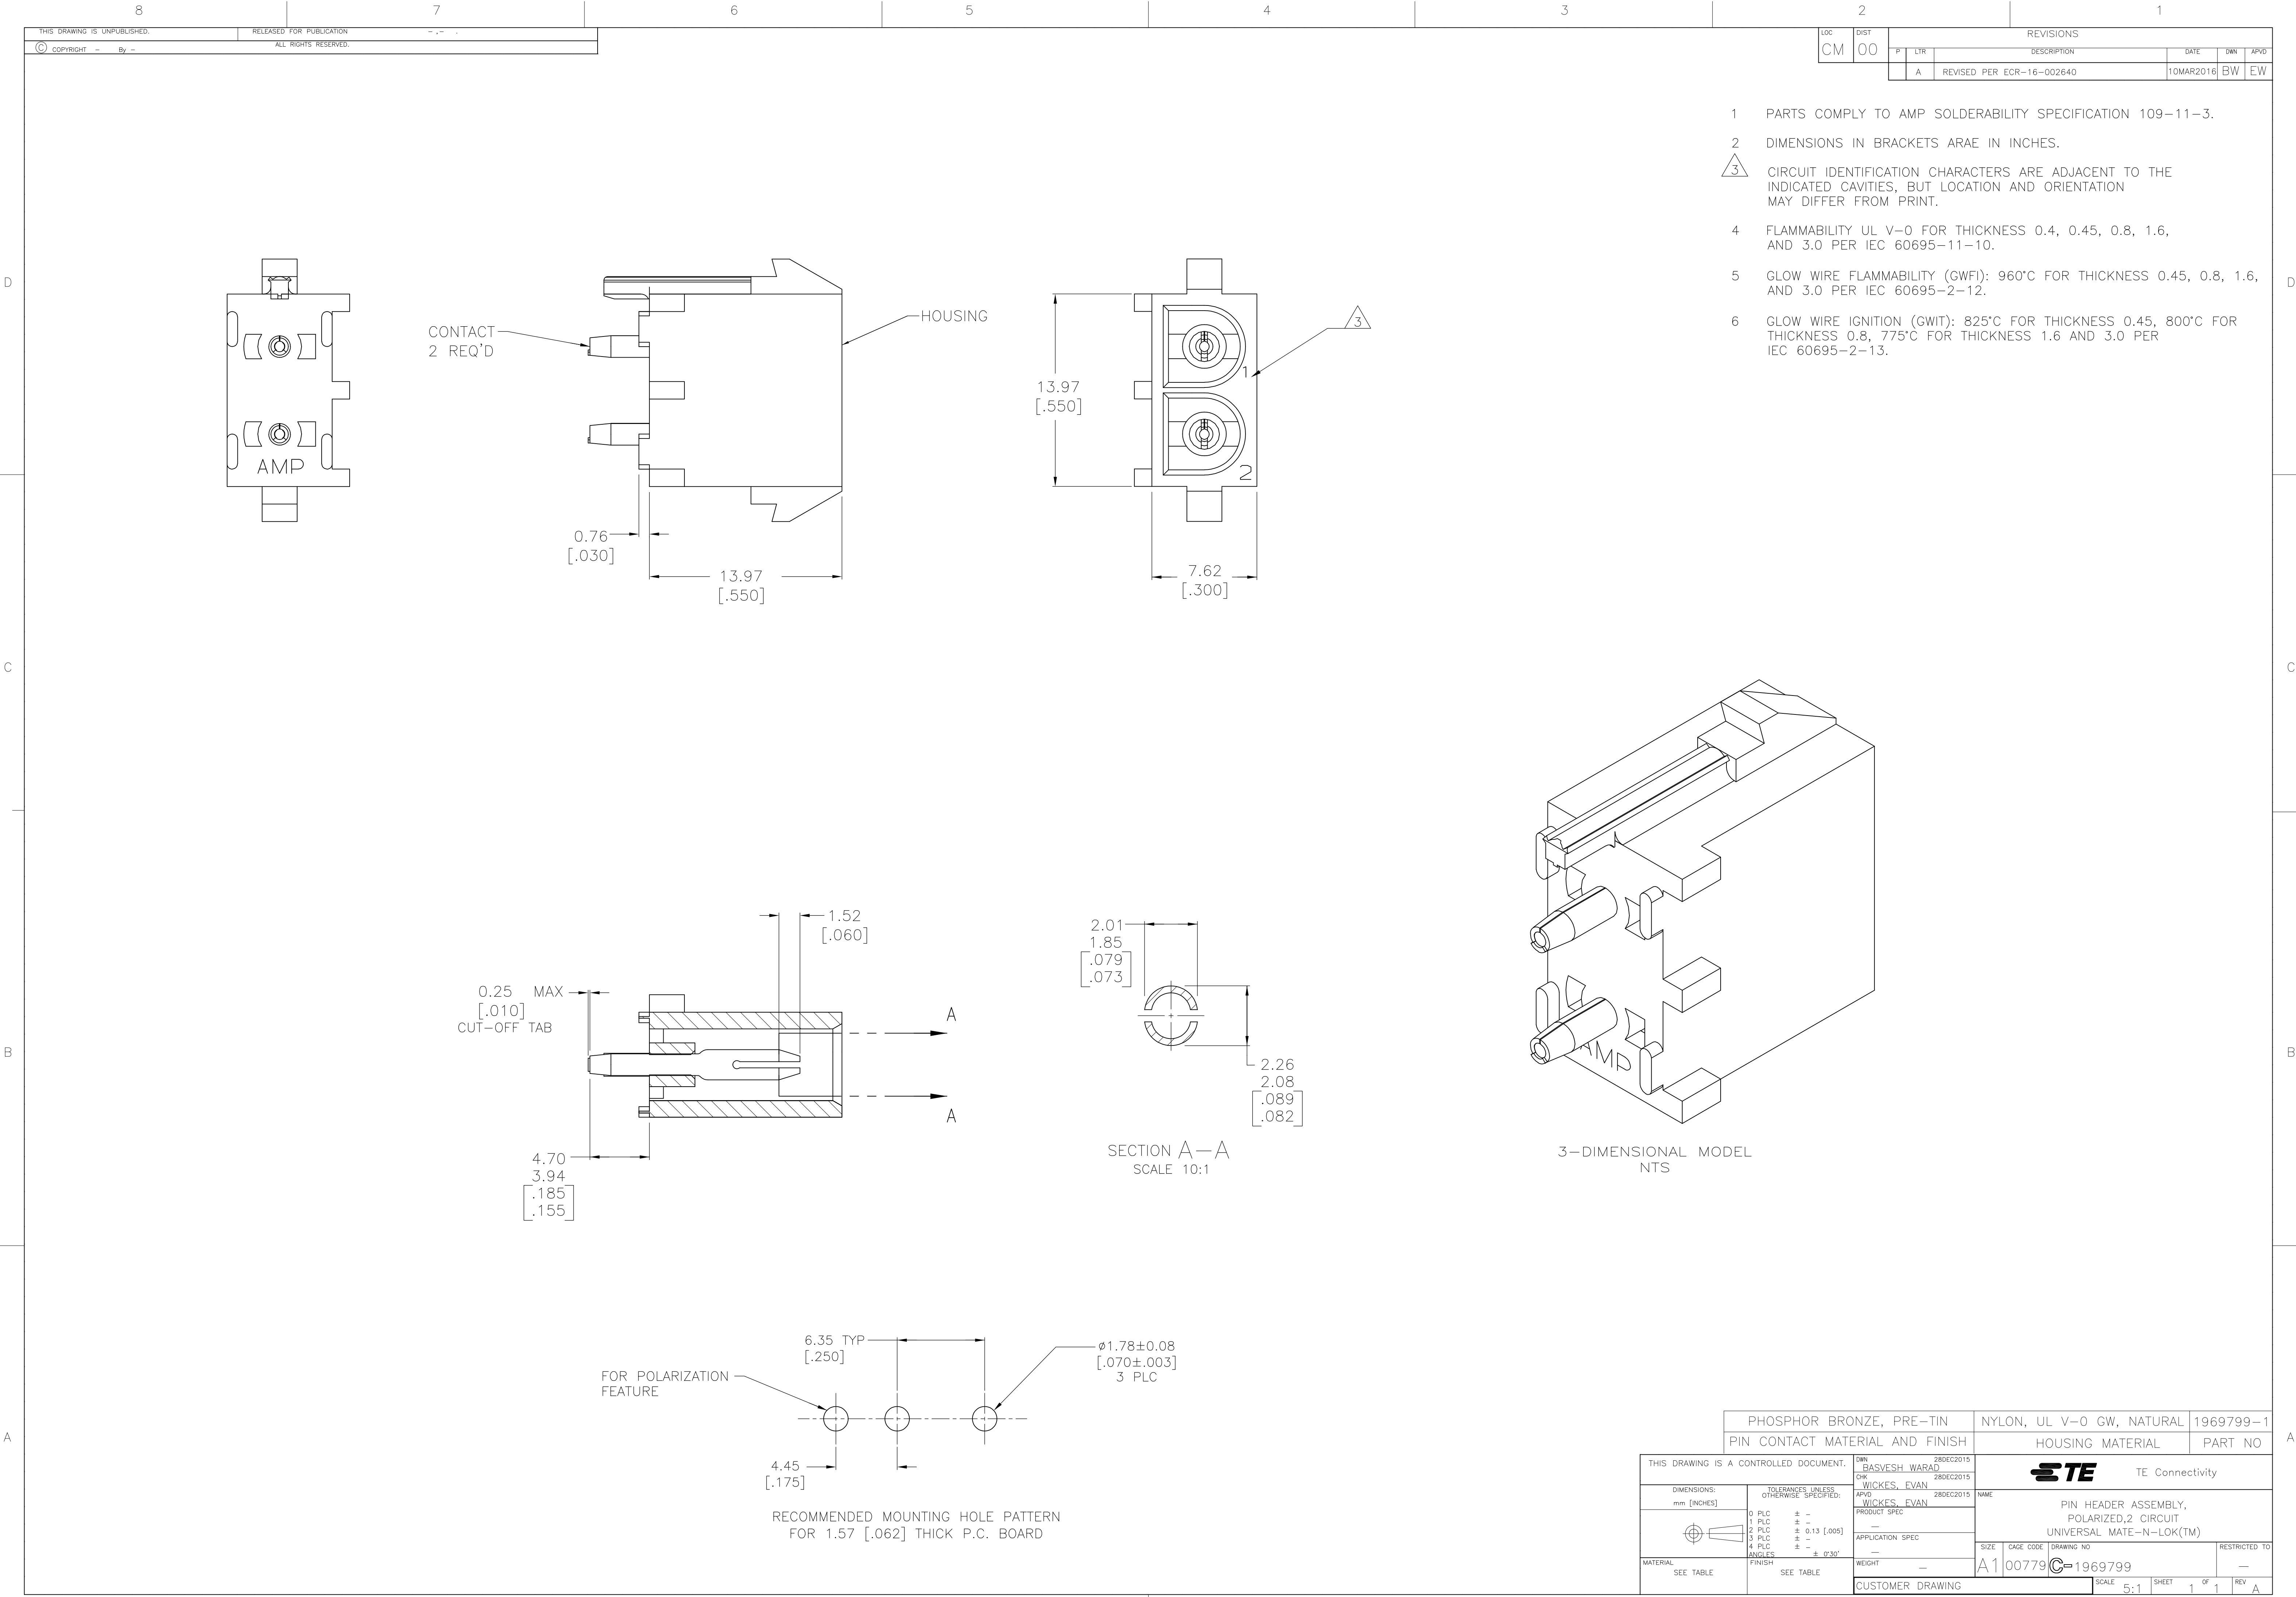

- 1 PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 DIMENSIONS IN BRACKETS ARAE IN INCHES.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 5 GLOW WIRE FLAMMABILITY (GWF): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 6 GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD CHK WICKES, EVAN APVD WICKES, EVAN	28DEC2015 28DEC2015 28DEC2015	TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± -		1 PLC ± -		2 PLC ± 0.13 [.005]	
3 PLC ± -		4 PLC ± -		ANGLES ± ± 0°30'	
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT -	
PHOSPHOR BRONZE, PRE-TIN		NYLON, UL V-0 GW, NATURAL		1969799-1	
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL		PART NO	
SIZE		CAGE CODE		DRAWING NO	
A1		00779		1969799	
CUSTOMER DRAWING		SCALE		SHEET	
5:1		1		OF 1	
				REV	
				A	