

DIP SWITCH DHN(F) SERIES

1.6mm
Half Pitch Type



FEATURES

- ※Low profile 1.6mm height
- ※Gold contact for high reliability
- ※Top tape type for washing process

APPLICATION

- ※Industrial control
- ※Automatic machines control
- ※NB, electronic devices


SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 25mA, 24V DC |
| Contact Resistance | 100mΩ max. |
| Insulation Resistance | 100MΩ min. 500V DC |
| Dielectric Strength | 300V AC/1 minute |
| Operating Force | 500gf max. |
| Travel | 0.6mm |
| Operating Life | 1,000 cycles |
| Operating Temp. | -40°C ~ +85°C |
| Storage Temp. | -40°C ~ +85°C |

HOW TO ORDER




CIRCUIT

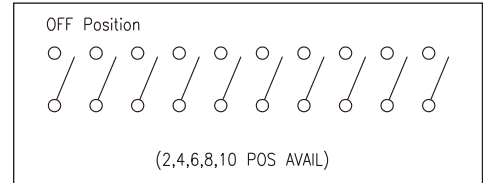


PACKAGE

- <Tube>
 DHN(F)-02: 125 pcs
 DHN(F)-04: 75 pcs
 DHN(F)-06: 54 pcs
 DHN(F)-08: 40 pcs
 DHN(F)-10: 33 pcs
- <Tape & Reel>
 DHN: 4000 pcs
 DHNF: 2500 pcs

DHN

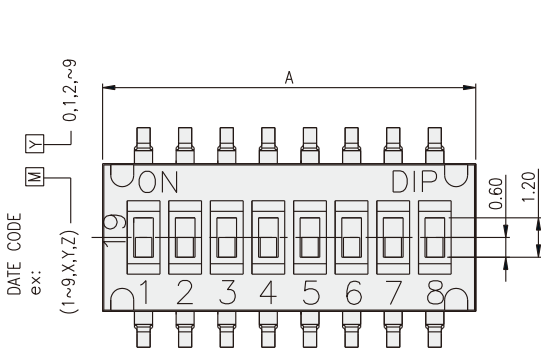


P.C.B. LAYOUT




| PART NO. | NO.OF POS | DIM A |
|----------|-----------|-------|
| DHN-02 | 2 | 3.77 |
| DHN-04 | 4 | 6.31 |
| DHN-06 | 6 | 8.85 |
| DHN-08 | 8 | 11.39 |
| DHN-10 | 10 | 13.93 |

DHNF

DIP SWITCH

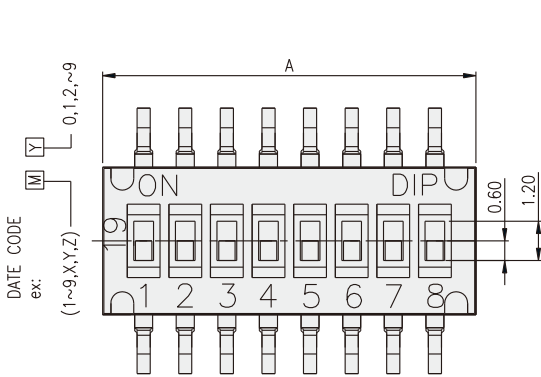

P.C.B. LAYOUT

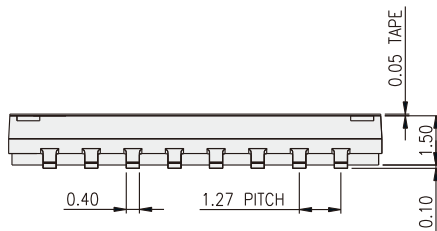

| PART NO. | NO.OF POS | DIM A |
|----------|-----------|-------|
| DHNF-02 | 2 | 3.77 |
| DHNF-04 | 4 | 6.31 |
| DHNF-06 | 6 | 8.85 |
| DHNF-08 | 8 | 11.39 |
| DHNF-10 | 10 | 13.93 |