1.6mm Half Pitch Type

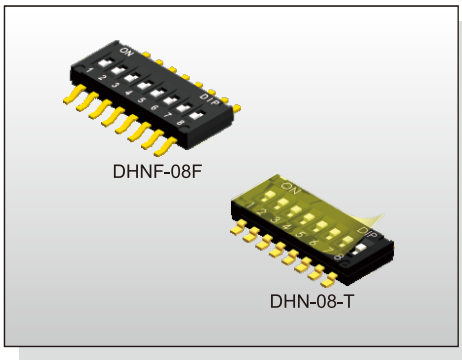

FEATURES

※Low profile 1.6mm height
※Gold contact for high reliability
※Top tape type for washing process

APPLICATION

※Industrial control
※Automatic machines control
※NB, electronic devices

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	500gf max.
Travel	0.6mm
Operating Life	1,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

D H N □ - □ □ □ - □ - □ - □

Pin Length:
□=6.70mm
F=8.10mm

Positions:
02, 04, 06, 08, 10

□="ON" Position
F="OFF" Position

□=Regular
T=Top Tape Sealed

Package:
□=Tube
T/R=Tape & Reel

V=RoHS & Lead Free Solderable
Q=Halogen Free

CIRCUIT

PACKAGE

<Tube>
DHN(F)-02: 125 pcs
DHN(F)-04: 75 pcs
DHN(F)-06: 54 pcs
DHN(F)-08: 40 pcs
DHN(F)-10: 33 pcs
<Tape & Reel>
DHN: 4000 pcs
DHNF: 2500 pcs

DHN

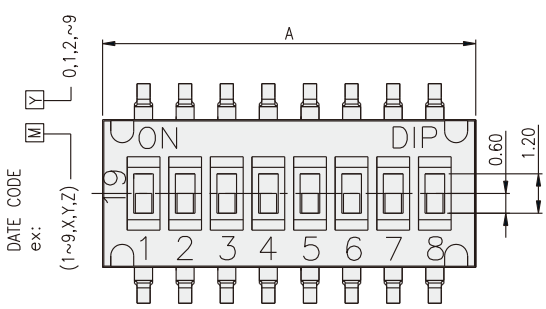

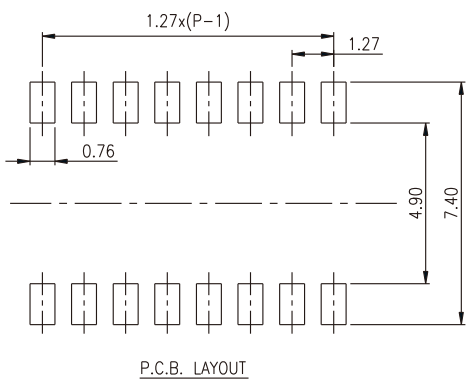

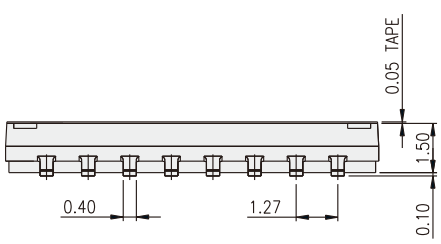



PART NO.	NO.OF POS	DIM A
DHN-02	2	3.77
DHN-04	4	6.31
DHN-06	6	8.85
DHN-08	8	11.39
DHN-10	10	13.93

DHNF

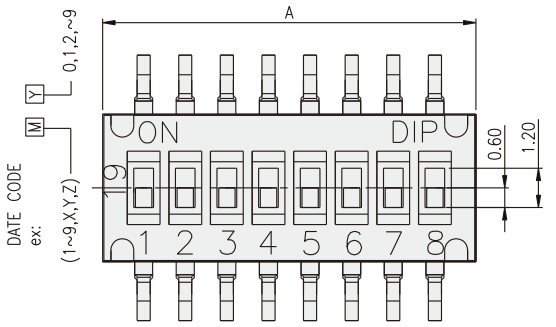

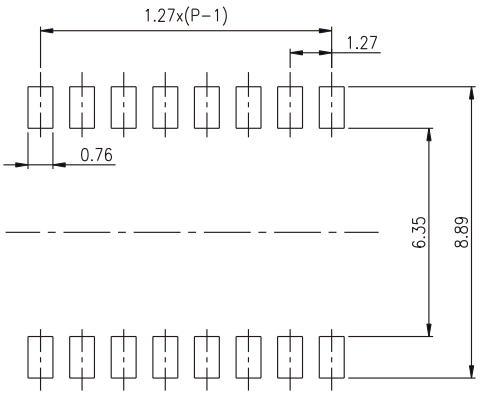

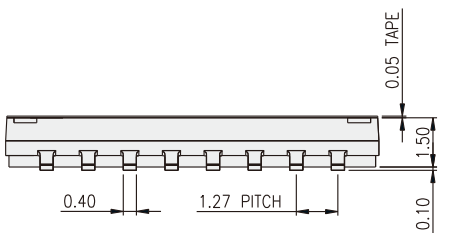

P.C.B. LAYOUT

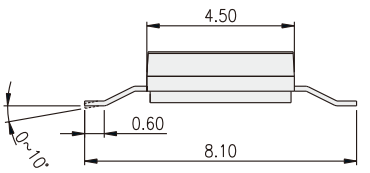

PART NO.	NO.OF POS	DIM A
DHNF-02	2	3.77
DHNF-04	4	6.31
DHNF-06	6	8.85
DHNF-08	8	11.39
DHNF-10	10	13.93