


DETAIL "A"
SCALE: 3:1

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	109 Ω	210 Ω	347 Ω
Minimum	- Ω	168 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

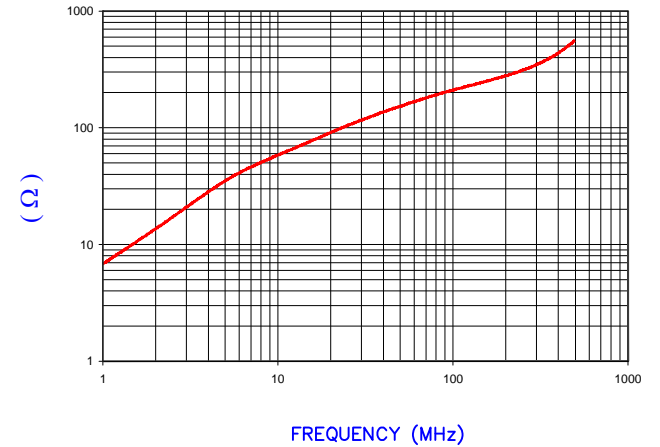

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture REF# 3336

RoHS

**UNCONTROLLED
DOCUMENT**

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	38.86 [1.530]	±	0.76 [.030]
B	12.95 [.510]	±	0.25 [.010]
C	28.58 [1.125]	±	0.76 [.030]
D	26.16 [1.030]	±	0.51 [.020]
E	26.04 [1.025]	±	0.64 [.025]

WEIGHT/1000 79.27 kgs 174.75 Lbs

DIMENSIONS ARE IN MM [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
PROJECT/PART NUMBER:				REV	DRAWN BY:		
C	UPDATE COMPANY LOGO	05/22/15	QIU	28B1531-000	C	JRK	
B	UPDATE Z SPEC AND COMPANY LOGO	06/25/07	JRK	DATE: 06/30/04	SCALE: 1 : 1	MATERIAL:	
A	ORIGINAL DRAFT	06/30/04	JRK	CAD #	TOOL #	FERRITE	
REV	DESCRIPTION	DATE	INT	28B1531-000-C	B1531		