

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1511173410

Status:


Active

Overview:

Milli-Grid Connector System

Description:

2.00mm Pitch, Milli-Grid PCB Header, Dual Row, Vertical, Through Hole, 2.00µm Tin (Sn) Plating, without Peg, 2.60mm PC Tail Length, with Pick and Place Cap, 10 Circuits, Low-Halogen, Tube

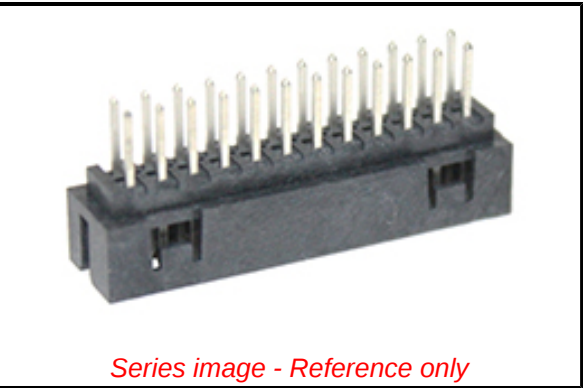

Documents:	
3D Model	Packaging Specification PK-151117-0001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-151117-3000 (PDF)
Product Specification PS-151117-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	151117
3D Viewer	Yes
Application	Board-to-Board, Signal, Wire-to-Board
CURRENT-MAX-NUMERIC	2.0
Datasheet Order No	987651-5501
Overview	Milli-Grid Connector System
PITCH-MATING-NUMERIC	2.00
Product Name	Milli-Grid
UPC	889056808026
Physical	
Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin over Nickel
Material - Plating Termination	Tin over Nickel
Material - Resin	Liquid Crystal Polymer
Net Weight	0.504/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	2.60mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	2.000µm
Plating min - Termination	2.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per	
-ED/88/2018 (15	
January 2019)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

151117 Series

Mates With

Milli-Grid Receptacle Housing (Low-Halogen) [151192](#)
Milli-Grid Receptacle Housing [51110](#)
Milli-Grid PCB Receptacles [78787](#) , [78788](#) , [79107](#) , [79109](#)

Robotic Placement	Pick and Place Cap
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2.0A
Voltage - Maximum	125V AC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	011
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-151117-0001-001, PK-151117-3000
Product Specification	PS-151117-0001-001
Sales Drawing	SD-151117-0001-001

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION