


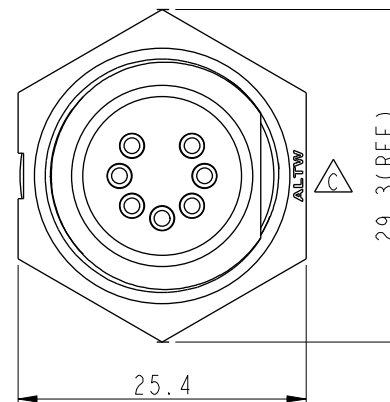
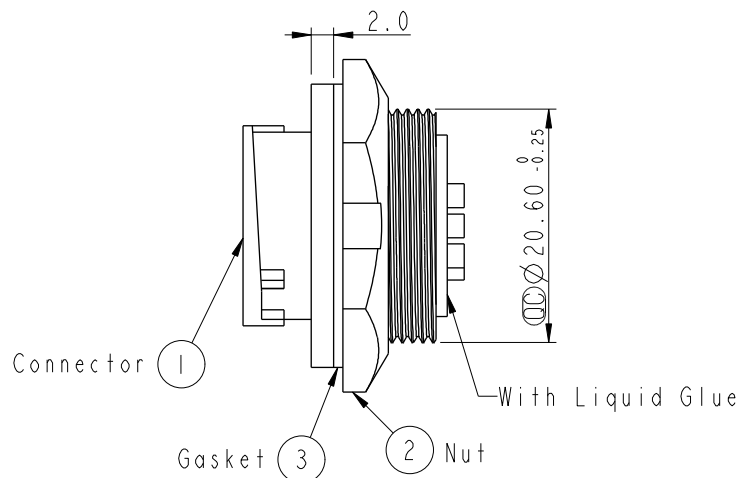




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0231	2008/10/03	Shin	Add Note
C	CI90271	2019/02/27	Ruru	Modify Note & Change Logo



Pin Assignments
Front View



Recommernded Panel Cut-Out

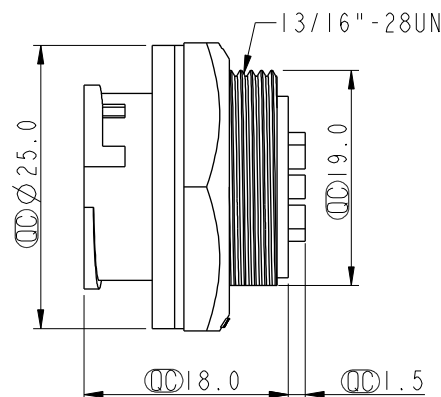

Note:

* Important Dimension.

* Waterproof Rate: IP67, Unmated

* Housing: Thermoplastic, Black

* Pin: Copper Alloy, Gold Plated

* Nut: Thermoplastic, Black

* Gasket: Rubber, Black

* Use with waterproof cap or dust cap

Maximum Panel Thickness: 3.0mm

* Use without waterproof cap or dust cap

Maximum Panel Thickness: 4.0mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm						TITLE Middle, Panel Lock 7Pin M Conn. M Pin		ITEM NO CD-07RMMS-LC7001		DRAWN BY Ruru		DATE 2019-02-27	
TOLERANCE		.X ±0.25		.XX ±0.1		SCALE 1:1		DWG NO CD-07RMMS-LC7001		CHECKED BY Rita		DATE 2019-02-27	
.XXX ±0.05		ANGLES ±1°		REV. C		SIZE A4		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-27	
				WC-REV. A.2		SHEET 1 OF 1							
				QC: Inspection item									

Amphenol LTW
安費諾亮泰企業股份有限公司